

## Further studies of proportional electroluminescence in two-phase argon

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2017 JINST 12 C05016

(<http://iopscience.iop.org/1748-0221/12/05/C05016>)

View [the table of contents for this issue](#), or go to the [journal homepage](#) for more

Download details:

IP Address: 84.237.42.47

This content was downloaded on 31/05/2017 at 06:32

Please note that [terms and conditions apply](#).

You may also be interested in:

[Proportional electroluminescence in two-phase argon and its relevance to rare-event experiments](#)

A. Bondar, A. Buzulutskov, A. Dolgov et al.

[Photon emission and atomic collision processes in two-phase argon doped with xenon and nitrogen](#)

A. Buzulutskov

[Advances in Cryogenic Avalanche Detectors](#)

A Buzulutskov

[Study of infrared scintillations in gaseous and liquid argon. Part II: light yield and possible applications](#)

A Bondar, A Buzulutskov, A Dolgov et al.

[Measurement of the ionization yield of nuclear recoils in liquid argon using a two-phase detector with electroluminescence gap](#)

A. Bondar, A. Buzulutskov, A. Dolgov et al.

[Study of infrared scintillations in gaseous and liquid argon. Part I: methodology and time measurements](#)

A Bondar, A Buzulutskov, A Dolgov et al.

[Infrared scintillation yield in gaseous and liquid argon](#)

A. Buzulutskov, A. Bondar and A. Grebenuk

[Direct observation of avalanche scintillations in a THGEM-based two-phase Ar avalanche detector using Geiger-mode APD](#)

A Bondar, A Buzulutskov, A Grebenuk et al.

INTERNATIONAL CONFERENCE ON INSTRUMENTATION FOR COLLIDING BEAM PHYSICS  
BUDKER INSTITUTE OF NUCLEAR PHYSICS, NOVOSIBIRSK, RUSSIA  
27 FEBRUARY – 3 MARCH 2017

## Further studies of proportional electroluminescence in two-phase argon

A. Bondar,<sup>a,b</sup> A. Buzulutskov,<sup>a,b</sup> A. Dolgov,<sup>b</sup> E. Frolov,<sup>a,b</sup> V. Nosov,<sup>a,b</sup> V. Oleynikov,<sup>a,b</sup>  
L. Shekhtman,<sup>a,b</sup> E. Shemyakina<sup>a,b,1</sup> and A. Sokolov<sup>a,b</sup>

<sup>a</sup>*Budker Institute of Nuclear Physics,  
Lavrentiev ave. 11, Novosibirsk 630090, Russia*

<sup>b</sup>*Novosibirsk State University,  
Pirogova st. 2, Novosibirsk 630090, Russia*

E-mail: [E.O.Shemyakina@inp.nsk.su](mailto:E.O.Shemyakina@inp.nsk.su)

**ABSTRACT:** A study of proportional electroluminescence in two-phase argon is relevant in the field of noble-gas liquid detectors for dark matter search and low-energy neutrino experiments. In this work, we continued to study proportional electroluminescence (EL) in two-phase argon doped with a minor (9 ppm) admixture of nitrogen, in the VUV, UV and visible spectral ranges. We confirmed the effect of enhancement of the EL yield, as well as the presence of a non-VUV component in addition to that of VUV, in proportional electroluminescence in two-phase Ar. On the other hand, the contribution of the non-VUV component determined here within the model of N<sub>2</sub> emission in the UV, turned out to be insufficient to explain the enhancement of the EL yield. Hence, the problem of proportional electroluminescence in two-phase Ar remains unresolved.

**KEYWORDS:** Charge transport, multiplication and electroluminescence in rare gases and liquids; Dark Matter detectors (WIMPs, axions, etc.); Noble liquid detectors (scintillation, ionization, double-phase)

ARXIV EPRINT: [1705.05101](https://arxiv.org/abs/1705.05101)

<sup>1</sup>Corresponding author.

---

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Experimental setup and measurement procedures</b>	<b>2</b>
<b>3</b>	<b>Experimental results</b>	<b>7</b>
<b>4</b>	<b>Conclusions</b>	<b>10</b>

---

## 1 Introduction

Studies of proportional electroluminescence in two-phase argon are relevant in the field of two-phase detectors for dark matter search [1] and coherent neutrino-nucleus scattering [2, 3] experiments. In two-phase detectors, the S2 signal (induced by the primary ionization in the noble-gas liquid), is detected through the effect of proportional electroluminescence (or secondary scintillation) in an electroluminescence (EL) gap located directly above the liquid-gas interface [4]. In proportional electroluminescence the energy provided to electrons by the electric field is almost fully expended on atomic excitations producing  $\text{Ar}^*(3p^5 4s^1)$  states. These are followed by the photon emission in the Vacuum Ultraviolet (VUV), around 128 nm, due to excimer ( $\text{Ar}_2^*$ ) production in three-body collisions and their subsequent decays (see [5] and references therein).

In the presence of a nitrogen admixture to gaseous argon the electroluminescence mechanism might be modified. Namely, the excimer production (and hence the VUV emission) can be taken over by that of excited  $\text{N}_2$  molecules (due to excitation transfer from Ar to  $\text{N}_2$  species), followed by their de-excitations in the near Ultraviolet (UV) through the emission of the so-called Second Positive System (2PS), at 310–430 nm [5]. Such a VUV-to-UV conversion, taking place directly in the detector medium, would substantially enhance the photon collection efficiency for the S2 signal due to avoiding problems with re-emission and total reflection losses in the Wavelength Shifter (WLS) film, which would be used otherwise.

It is known that in gaseous argon at room temperature such a VUV-to-UV conversion of electroluminescence can be effectively performed by doping with nitrogen at a relatively large content, of 0.2–2% [6–8]. Recently proportional electroluminescence of gaseous Ar in the VUV has been studied for the first time at cryogenic temperatures, in the two-phase mode [9, 10]: the EL yield was measured in Ar, with a minor ( $\leq 50$  ppm) admixture of  $\text{N}_2$  that might be typical for large-scale liquid Ar experiments. The EL yield was found to be substantially enhanced, by a factor of 2.7 [9], compared to that measured at room temperature [11] and to that expected from theory [12]. This enhancement was explained by a hypothesis that 50% of emitted photons were due to  $\text{N}_2$  2PS emission in the near UV: a fraction of such an emission was assumed to be recorded directly, i.e. escaping re-emission in the WLS film and thus to have a considerably higher photon collection efficiency.


This hypothesis implies that the excitation transfer from Ar to N<sub>2</sub> species is substantially enhanced at 87 K compared to room temperature. On the other hand, comprehensive analysis of energy levels, photon emission bands and reaction rate constants in two-phase Ar doped with N<sub>2</sub>, performed recently in [5], tends us to believe that such a hypothesis can hardly be true at such a small N<sub>2</sub> content, leading to the conclusion that the experimental data of [9] were incorrectly interpreted.

In this paper, we will attempt to identify the problem, in particular we will try to reproduce the experimental results of [9] and to understand what the mystery of proportional electroluminescence in two-phase Ar is.

The present study was performed in the course of the development of two-phase Cryogenic Avalanche Detectors (CRADs) of ultimate sensitivity for rare-event experiments [13–19].

## 2 Experimental setup and measurement procedures


The experimental setup of the present work was used in the measurement session of 2016; it was similar to that used in our previous measurements in 2015 [9, 10]: see figure 1. The setup included a 91 cryogenic chamber filled with 2.5 liters of liquid Ar with a minor (9 ppm) admixture of N<sub>2</sub>. The detector was operated in a two-phase mode in the equilibrium state, at a saturated vapor pressure of  $1.000 \pm 0.003$  atm and at a temperature of 87.3 K. During each cooling procedure Ar was purified from electronegative impurities by Oxisorb filter, providing electron life-time in the liquid  $> 100 \mu\text{s}$  [10].

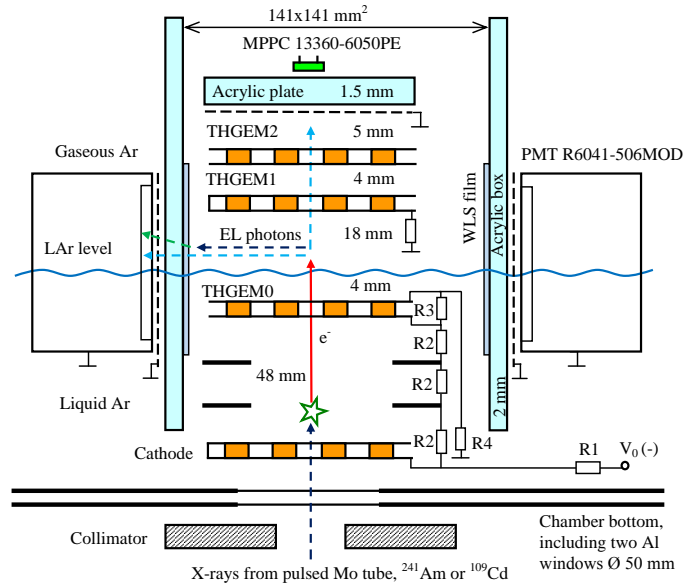

**Figure 1.** Schematic view of the experimental setup (not to scale). The resistors of the voltage divider have the following values: R1, R2, R3 and R4 is 80, 40, 4 and 600 M $\Omega$ , respectively.

The cryogenic chamber comprised a cathode electrode, two field-shaping electrodes and a thick GEM (THGEM0), immersed in a 55 mm thick liquid Ar layer. These four elements were biased through a resistive high-voltage divider placed within the liquid, forming a drift region in liquid Ar,

48 mm long. A 4 mm thick liquid Ar layer above the THGEM0 acted as an electron emission region. A double-THGEM was placed in the gas phase above the liquid. The EL gap (the EL region), 18 mm thick, was formed by the liquid surface and the THGEM1 plate; the latter was grounded through a resistor acting as an anode of the gap. All electrodes had the same active area, of  $10 \times 10 \text{ cm}^2$ . The voltage applied to the divider varied from 11 to 22 kV, producing the electric drift field in liquid Ar of 0.34–0.68 kV/cm, electric emission field of 2.6–5.1 kV/cm and electric field in the EL gap of 4.0–8.0 kV/cm. The average drift time of the electrons across the drift, emission and EL regions varied from about 25 to 35  $\mu\text{s}$ , depending on the applied electric fields.

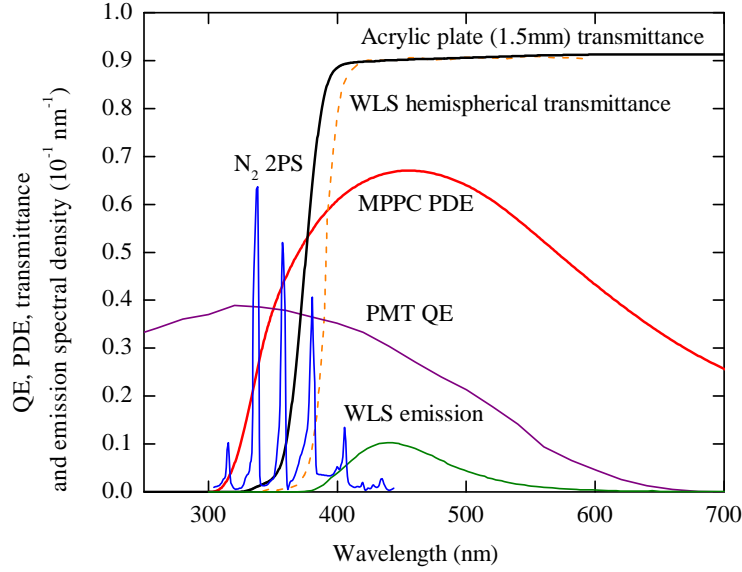


**Figure 2.** Quantum efficiency (QE) of the PMT R6041-506MOD at 87 K obtained from [20, 21] using a temperature dependence derived there, Photon Detection Efficiency (PDE) of the MPPC 13360-6050PE [16, 20], transmittance of the 1.5 mm thick acrylic plate in front of the MPPC measured by us and hemispherical transmittance of the WLS (TPB in polystyrene) [22]. Also shown are the EL emission spectrum of Ar doped with  $\text{N}_2$  (0.2%) in the near UV and visible range measured at room temperature and high ( $\sim 1 \text{ atm}$ ) pressure [7] and that of the WLS [23].

The EL gap was viewed by four compact 2-inch PMTs R6041-506MOD [17, 19], located on the perimeter of the gap. To prevent discharges and field penetration from the high-voltage region of the EL gap, the PMTs were electrically insulated from the gap by a grounded mesh and an acrylic protective box. To make the PMT sensitive to the VUV emission of pure Ar, four WLS films based on TPB (tetraphenyl-butadiene) in polystyrene matrix [22, 23] were deposited on the inner box surface facing the EL gap in front of each PMT. In addition, the EL gap was viewed by a multi-pixel photon counter (MPPC or SiPM) through an acrylic plate and double-THGEM assembly (the latter acting as a shadow mask), with an overall spectral sensitivity ranging from the near UV (360 nm) to the near IR (1000 nm): see figure 2.

To verify the reproducibility of the results, we have made two important modifications of the setup as compared to that of [9, 10]: we replaced those setup elements, which might most strongly affect the accuracy of the EL yield measurements. Firstly, we completely replaced the PMT system, including all the PMTs and the acrylic box with the WLS films. Secondly, we replaced the MPPC

of [9, 10] with that of 13360-6050PE type [20], having a 4-fold larger active area ( $6 \times 6 \text{ mm}^2$ ) and better characteristics at cryogenic temperatures, in particular a higher gain and smaller cross-talk.


In addition to these modifications, we used a new method to measure the  $\text{N}_2$  content in Ar, namely the emission-spectrum-measurement technique using the gas analyzer “SVET” [25], in contrast to [9, 10] where the Residual-Gas-Analyzer (RGA) technique was used. Similarly to [9, 10], the  $\text{N}_2$  content was measured in the gas contained in the stainless steel bottle from which the gas was liquefied into the cryogenic chamber and collected back (by cooling the bottle with liquid nitrogen), respectively before and after the cryogenic measurement. The  $\text{N}_2$  content measured this way amounted to  $9 \pm 3 \text{ ppm}$ , corresponding to the content in the two-phase mode of about 9 and 24 ppm in the liquid and gas phase, respectively (according to Raoult’s law).

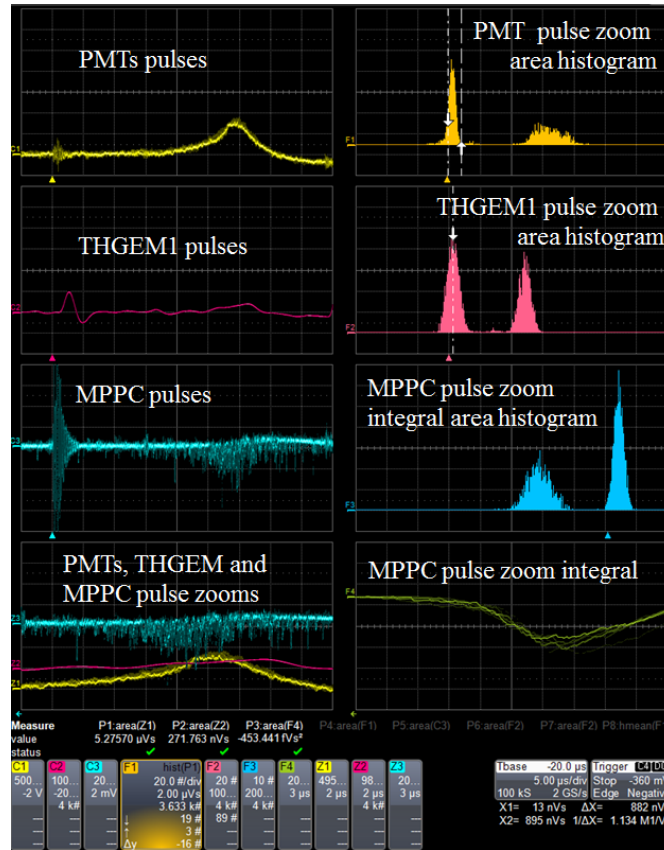

Three types of signals were recorded from the EL gap: the optical signal from the PMTs, the charge signal from the THGEM1 acting as an anode of the EL gap and the optical signal from the MPPC (see figure 3). The optical signals from the four PMTs were linearly summed using CAEN N625 unit; they were amplified with a linear amplifier with a shaping time of 200 ns. The THGEM1 charge signals were recorded using charge-sensitive and shaping amplifiers with an overall time constant of 1  $\mu$ s. The MPPC optical signals were recorded using a fast amplifier with a shaping time of 40 ns.

The amplitude of the PMT signal was expressed in the numbers of photoelectrons (p.e.) by measuring the area (single time-integral) of the pulse in its selected part, positive and free from electrical pickups (PMT pulse zoom in figure 3), divided by the area of the appropriate part of the single-electron pulse. The latter was determined in special measurements using PMT noise signals (figure 4, left) and PMT gain dependence on voltage (figure 4, right).

The amplitude of the THGEM1 signal was expressed in the numbers of electrons by measuring the area of the pulse in its selected part, positive and free from electrical pickups (THGEM1 pulse zoom in figure 3), using amplifier circuit calibration, the latter procedure including the charge injection with the help of a pulse generator and a precise capacitance.

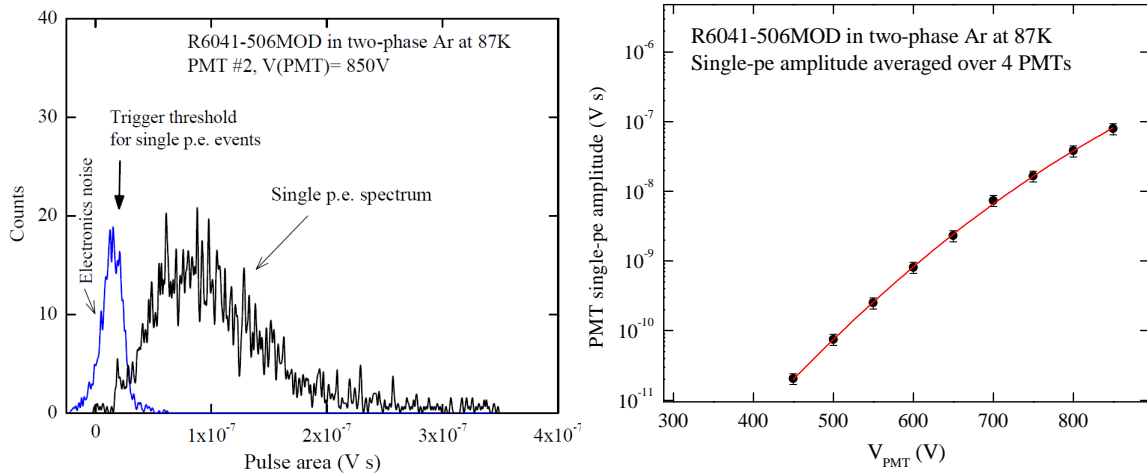

**Figure 4.** Left: single-photoelectron pulse-amplitude (pulse-area) distribution of the noise signals of one of the PMTs; electronics noise spectrum is also shown. Right: PMT gain averaged over the four PMTs, in terms of the averaged PMT single p.e. amplitude, as a function of the voltage applied to the PMT divider.

The MPPC signal was essentially bipolar, reflecting the characteristic response of the fast amplifier. Accordingly, we had to apply the double time-integration to correctly determine the signal amplitude, since the single time-integral tended to zero at given time scales (5  $\mu$ s/div): see figure 3. Similarly to [26], this technique permitted assessing the total amplitudes of long MPPC signals, consisting of multiple short single-p.e. pulses separated in time; a typical example of such a signal is shown in figure 3. On the other hand, in this method the expression of the MPPC amplitude in the p.e. number turned out to be difficult, since the single p.e. amplitude at such a large time scale was not easy to determine: due to fluctuations of the zero-level at large time scales, the single p.e. peaks were eroded so that they became indistinguishable. To overcome this problem, we had to measure the single p.e. amplitude at shorter times and extrapolate it to larger time scales. However,



this procedure was not that accurate. In this work we applied a new improved procedure to associate the MPPC signal amplitude with the p.e. number. In this procedure, performed off-line, we directly counted the number of p.e. peaks in the pulse waveforms on a limited data set and related it to the measured amplitude.

It should be remarked that the MPPC single p.e. amplitude in our previous work [9] was measured at much shorter integration times than those used in the EL yield measurements, and thus was essentially underestimated. This resulted in the overestimated MPPC amplitude, which in turn led to the overestimated contribution of the N<sub>2</sub> 2PS emission component to the overall EL yield, as will be discussed in the next section.

The sensitivity of the two-phase detector with EL gap is characterized by the EL gap yield. In our case it can be defined as the number of photoelectrons recorded by the PMTs or MPPC ( $N_{pe}$ ), per drifting electron in the EL gap:  $Y_{gap} = N_{pe}/N_e$ . Here  $N_e$  is the charge expressed in the number of electrons, drifting in the EL gap and producing proportional electroluminescence.

Figure 2 presents optical spectra of the PMT Quantum Efficiency (QE) [20, 21], MPPC Photon Detection Efficiency (PDE) [16, 20], acrylic plate transmittance (measured by us) and WLS (TPB in polystyrene) hemispherical transmittance [22]. In addition, the EL emission spectrum of Ar doped with N<sub>2</sub>, namely the 2PS spectrum [7], and the emission spectrum of the WLS (TPB in polystyrene) [23] are presented. These data were used to determine the absolute EL yield.

The absolute EL yield is defined as the number of emitted photons ( $N_{ph}$ ) normalized to the number of drifting electrons producing electroluminescence and to the electron drift path ( $d$ ):

$$Y_{EL} = N_{ph}/N_e/d. \quad (2.1)$$

The number of photons recorded by the PMTs or MPPC is defined as

$$N_{ph} = N_{pe}/PCE. \quad (2.2)$$

Here PCE is the photon-to-photoelectron conversion efficiency. For PMTs, it is equal to  $PCE = \varepsilon\langle CE\rangle\langle QE\rangle$  for the VUV and UV (N<sub>2</sub> 2PS) components re-emitted by the WLS and  $PCE = \varepsilon\langle QE\rangle$  for the UV component recorded directly. For MPPC, it is equal to  $PCE = \varepsilon\langle PDE\rangle$ .

Here  $\varepsilon$  is the photon collection efficiency,  $\langle CE\rangle$  the WLS conversion efficiency averaged over the VUV (pure Ar) or UV (N<sub>2</sub> 2PS) emission spectrum,  $\langle QE\rangle$  and  $\langle PDE\rangle$  the PMT QE and MPPC PDE averaged over the WLS or N<sub>2</sub> 2PS emission spectrum and appropriately convolved with the WLS hemispherical or acrylic plate transmittance spectrum (figure 2). In particular, PMT QE averaged over the WLS emission spectrum is  $\langle QE\rangle = 26.6\%$ , PMT QE averaged over the N<sub>2</sub> 2PS emission spectrum and convolved with the WLS hemispherical transmittance is  $\langle QE\rangle = 5.1\%$  and MPPC PDE averaged over the N<sub>2</sub> 2PS emission spectrum and convolved with the acrylic plate transmittance is  $\langle PDE\rangle = 18.1\%$ . Also, we used  $CE = 0.58$  around 128 nm [23],  $CE = 0.40$  at 300–400 nm [22–24] and  $CE = 0$  above 400 nm.

The photon collection efficiencies were calculated using several Monte-Carlo simulation procedures. The first and the second ones simulated the emission of photons in the EL gap of either the VUV (128 nm) or the UV (N<sub>2</sub> 2PS) component absorbed in the WLS. The latter amounted to 85% of the N<sub>2</sub> 2PS, at 300–400 nm, obtained from convolution of the N<sub>2</sub> 2PS emission and WLS hemispherical transmittance spectra of figure 2. The propagation of photons to the WLS film, their



**Table 1.** Photon collection efficiency ( $\varepsilon$ ) calculated for different photon emission components, WLS conversion efficiency averaged over the VUV (pure Ar) or UV (N<sub>2</sub> 2PS) emission spectrum ( $\langle\text{CE}\rangle$ ), quantum efficiency of PMTs ( $\langle\text{QE}\rangle$ ) or photon detection efficiency of MPPC ( $\langle\text{PDE}\rangle$ ) averaged over the WLS or N<sub>2</sub> 2PS emission spectrum and appropriately convolved with the WLS hemispherical or acrylic plate transmittance spectrum, and the resulting photon-to-photoelectron conversion efficiency (PCE).

Emission component	Photodetector	$\varepsilon$	$\langle\text{CE}\rangle$	$\langle\text{QE}\rangle$ or $\langle\text{PDE}\rangle$	PCE
VUV (pure Ar) at 128 nm re-emitted by WLS	4PMT	0.0052	0.58	0.266	$8.0 \times 10^{-4}$
UV (N <sub>2</sub> 2PS) at 300–450 nm re-emitted by WLS	4PMT	0.0061	0.34	0.266	$5.5 \times 10^{-4}$
UV (N <sub>2</sub> 2PS) at 300–450 nm recorded directly	4PMT	0.052	-	0.051	$2.7 \times 10^{-3}$
UV (N <sub>2</sub> 2PS) at 300–450 nm recorded directly	MPPC	0.00032	-	0.181	$5.9 \times 10^{-5}$

conversion there to visible light photons and their further propagation to the PMT photocathodes were simulated.

The third procedure simulated the emission of photons of the UV (N<sub>2</sub> 2PS) component escaping absorption in the WLS (amounting to 15% of the N<sub>2</sub> 2PS, at 400–450 nm) and thus directly propagating to the PMTs. The photon-to-photoelectron conversion efficiency for this component turned out to be considerably higher than that of the light re-emitted by the WLS, by about a factor of 20, due to the absence of re-emission and total internal reflection losses.

The fourth procedure simulated the emission of photons of the UV (N<sub>2</sub> 2PS) component and their propagation to the MPPC through the double-THGEM, protective grid and acrylic plate (amounting to 31% of the N<sub>2</sub> SPS, at 360–450 nm).


Because of the critical dependence of the absolute photon yield on given simulation procedures, the latter were carried out in two ways using different program codes: that of developed ourselves and that using a photon tracing facility of Geant4 software package. The two ways were consistent within 20%, which was finally included in a systematic error.

The results of these simulation procedures are presented in table 1 showing the values of  $\varepsilon$ ,  $\langle\text{QE}\rangle$ ,  $\langle\text{PDE}\rangle$  and PCE for appropriate emission components.

Other details of the experimental setup and measurement procedures were described elsewhere [9, 10].

### 3 Experimental results


In the previous paper [9], it was two observations that prompted us to propose a hypothesis about the enhancement of the N<sub>2</sub> 2PS emission in two-phase Ar. The first observation is related to the excess of the EL yield compared to that expected from theory, by a factor of 2.7, within the “pure Ar” approach, i.e. when the photon emission is fully attributed to that of Ar<sub>2</sub><sup>\*</sup> excimers in the VUV. The second observation is related to the presence of the MPPC signal, directly indicating on the existence of emission component in the non-VUV (see figure 2 for spectra reference).

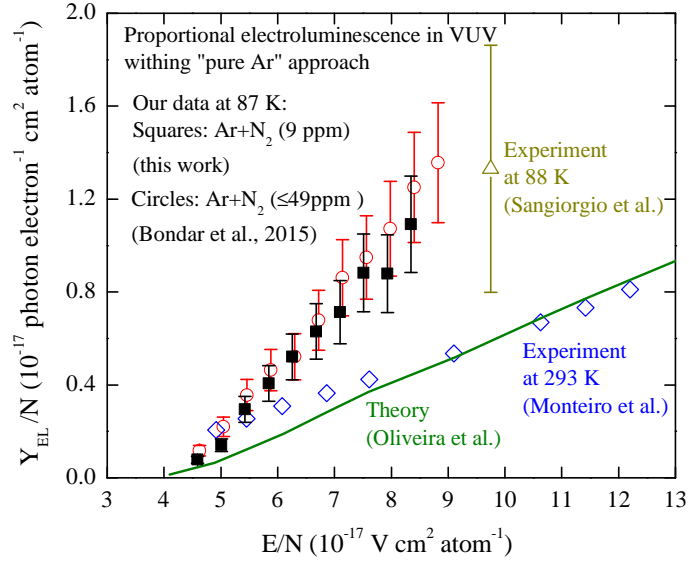

**Figure 5.** Reduced EL yield in the VUV as a function of the reduced electric field, obtained in two-phase Ar within the “pure Ar” approach. Shown are the data of the present work obtained in 2016 in Ar+N<sub>2</sub> (9 ppm), those of our previous work obtained in 2015 in Ar+N<sub>2</sub> (≤ 49 ppm) (Bondar et al. [9]) and the data point deduced from the work of Sangiorgio et al. [27] obtained in pure Ar. For comparison, the yields in gaseous Ar in the VUV obtained experimentally at 293 K (Monteiro et al. [11]) and theoretically (Oliveira et al. [12]) are presented.

The first observation, i.e. the “pure Ar” approach, is illustrated in figure 5, showing the reduced EL yield ( $Y_{\text{EL}}/N$ ) as a function of the reduced electric field ( $E/N$ ). On the one hand, one can see that the data of the present work strongly support the result of our previous work that the EL yield in two-phase Ar is substantially enhanced (by a factor of 2–3) compared to that predicted by the theory and to that measured at room temperature. On the other hand, there is a significant difference in N<sub>2</sub> content between the present data (of 2016) and the previous data (of 2015): 9 ppm versus 49 ppm. This fact indicates that the enhancement effect might not be related to N<sub>2</sub> dopant, in contrast to that assumed in [9]. These conclusions are also supported by the data point of another group obtained for pure Ar, deduced by us from the work [27] and shown in figure 5.

The second observation is illustrated in figure 6, showing the EL gap yield measured using PMT and MPPC signals. On the one hand, we confirm here the presence of MPPC signal observed in our previous work [9], consequently confirming the existence of non-VUV emission. To move forward, we have to adopt a certain model for this non-VUV component. An exhaustive description of sources of non-VUV emission in two-phase Ar doped with N<sub>2</sub> and Xe can be found elsewhere [5], presenting comprehensive analysis of energy levels, photon emission bands and reaction rate constants. In the PMT sensitivity region, all such sources are related to N<sub>2</sub> emission, namely to that of 2PS or 1PS (first positive system) due to N<sub>2</sub><sup>\*</sup>(C) or N<sub>2</sub><sup>\*</sup>(B) excited states, respectively, the first source being preferred according to reaction kinetic analysis. Also, emission in the NIR (near infrared) can not be related to this non-VUV component, since NIR electroluminescence starts at much higher fields [14]. Given no other rational assumptions, we adopt here the hypothesis of N<sub>2</sub> 2PS origin of non-VUV emission, similarly to [9].

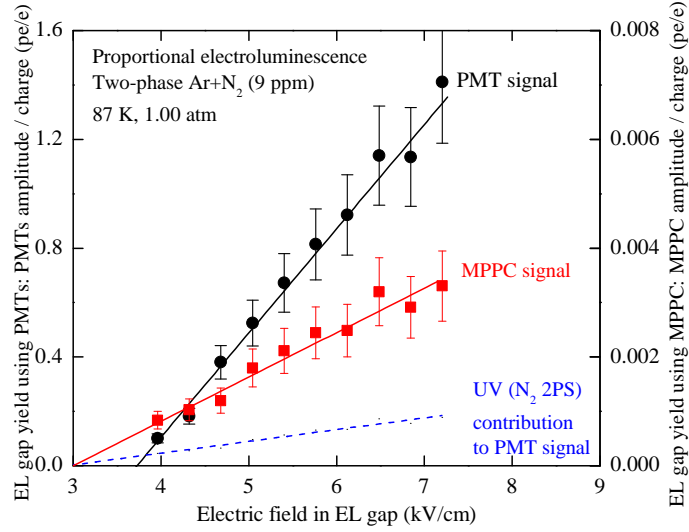

**Figure 6.** EL gap yield measured using the PMT signal (left scale) and MPPC signal (right scale) as a function of the electric field in the EL gap. The dashed line indicates the contribution of proportional electroluminescence in the UV within the “Ar+N<sub>2</sub>” approach (i.e. due to N<sub>2</sub> 2PS emission) to the PMT signal, deduced from the EL yield using the MPPC signal.

On the other hand, when we estimated the contribution of this UV (N<sub>2</sub> 2PS) component to the PMT signal, it turned out to be a factor of 6 smaller than that reported in [9]: see figure 6. We think that this discrepancy is due to the fact that the MPPC single p.e. amplitude in our previous work [9] was essentially underestimated, leading to an overestimated MPPC amplitude, as discussed in the previous section. Accordingly, the UV contribution amounts to 14% only, the rest of the PMT signal being attributed to the VUV component.

Figure 7 shows the reduced EL yield in two-phase Ar, obtained within this “Ar+N<sub>2</sub>” approach, i.e. in the VUV and UV assuming that the latter component (recorded via MPPC) is due to N<sub>2</sub> 2PS emission. In this approach, the discrepancy with theory for the VUV emission still remains quite significant, about a factor of 2.


The linear dependence of the EL yield in the VUV (Ar<sub>2</sub><sup>\*</sup> excimer emission) and in the UV (N<sub>2</sub><sup>\*</sup>(C) 2PS emission) on the electric field (figure 7) is described by the following equations:

$$Y_{\text{EL}}/N = 0.232E/N - 1.024, \quad (3.1)$$

$$Y_{\text{EL}}/N = 0.008E/N - 0.026. \quad (3.2)$$

The slope of the line defines the amplification parameter of proportional electroluminescence. It amounts to  $232 \pm 13$  and  $8 \pm 1$  photons per kV in the VUV and UV, respectively.

We may conclude, that the contribution of the UV component is insufficient to explain the enhancement effect of the PMT signal, in contrast to [9] and in accordance with theoretical analysis of [5]. As a result, the situation with interpretation of data becomes even more confusing than it was in the previous work [9]. There are still the following two questions for proportional electroluminescence in two-phase Ar which we cannot explain at the moment: the enhancement of the EL yield in the VUV and the origin of non-VUV emission.

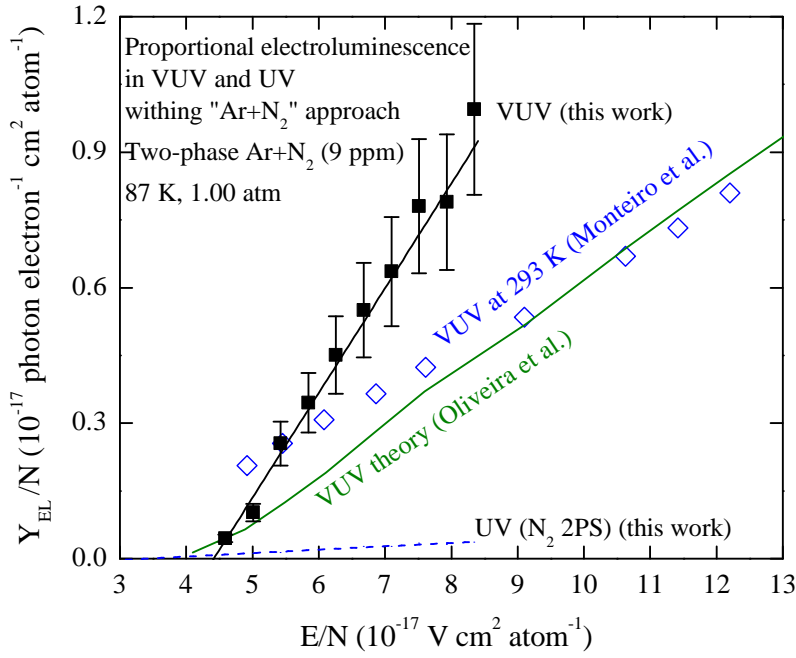

**Figure 7.** Reduced EL yield in the VUV and UV as a function of the reduced electric field, obtained in this work within the “Ar+N<sub>2</sub>” approach. For comparison, the yields in gaseous Ar in the VUV obtained experimentally at 293 K (Monteiro et al. [11]) and theoretically (Oliveira et al. [12]) are presented.

#### 4 Conclusions

In this paper, we continued to study the problem of proportional electroluminescence in two-phase Ar doped with N<sub>2</sub>, with the intention of verifying the data of our previous work [9]. On the one hand, the results of present work confirm the effect of EL yield enhancement in two-phase Ar observed in [9]. We also confirm the presence of non-VUV component in addition to that of VUV, in proportional electroluminescence. On the other hand, the contribution of the UV component determined here within the model of N<sub>2</sub> 2PS emission, turned out to be insufficient to explain the enhancement effect, in contrast to [9] and in accordance with theoretical analysis of [5].

Finally, the present study helped us to identify the problem: at the moment we cannot explain the mystery of proportional electroluminescence in two-phase Ar; it is to be resolved in future studies.

#### Acknowledgments

This study was supported by Russian Science Foundation (project No. 16-12-10037); it was done within the R&D program for the DarkSide-20k experiment. We also acknowledge the partial support of the Grant of President of Russian Federation for the leading scientific Schools of Russian Federation, NSh-9022-2016.2.

## References

- [1] DARKSIDE collaboration, P. Agnes et al., *First Results from the DarkSide-50 Dark Matter Experiment at Laboratori Nazionali del Gran Sasso*, *Phys. Lett. B* **743** (2015) 456 [[arXiv:1410.0653](#)].
- [2] C. Hagmann and A. Bernstein, *Two-phase emission detector for measuring coherent neutrino-nucleus scattering*, *IEEE Trans. Nucl. Sci.* **51** (2004) 2151.
- [3] D. Akimov, A. Bondar, A. Burenkov and A. Buzulutskov, *Detection of reactor antineutrino coherent scattering off nuclei with a two-phase noble gas detector*, *2009 JINST* **4** P06010 [[arXiv:0903.4821](#)].
- [4] V. Chepel and H. Araujo, *Liquid noble gas detectors for low energy particle physics*, *2013 JINST* **8** R04001 [[arXiv:1207.2292](#)].
- [5] A. Buzulutskov, *Photon emission and atomic collision processes in two-phase argon doped with xenon and nitrogen*, *Europhys. Lett.* **117** (2017) 39002 [[arXiv:1702.03612](#)].
- [6] A.J.P.L. Policarpo et al., *The argon-nitrogen proportional scintillation counter*, *Nucl. Instrum. Meth.* **55** (1967) 105.
- [7] T. Takahashi et al., *Emission spectra from Ar-Xe, Ar-Kr, Ar-N<sub>2</sub>, Ar-CH<sub>4</sub>, Ar-CO<sub>2</sub> and Xe-N<sub>2</sub> gas scintillation proportional counters*, *Nucl. Instrum. Meth.* **205** (1983) 591.
- [8] K. Kazkaz, M. Foxe, A. Bernstein, C. Hagmann, I. Jovanovic, P. Sorensen et al., *Operation of a 1-Liter-Volume Gaseous Argon Scintillation Counter*, *Nucl. Instrum. Meth. A* **621** (2010) 267.
- [9] A. Bondar, A. Buzulutskov, A. Dolgov, V. Nosov, L. Shekhtman, E. Shemyakina et al., *Proportional electroluminescence in two-phase argon and its relevance to rare-event experiments*, *Europhys. Lett.* **112** (2015) 19001 [[arXiv:1509.00664](#)].
- [10] A. Bondar, A. Buzulutskov, A. Dolgov, V. Nosov, L. Shekhtman, E. Shemyakina et al., *Two-phase Cryogenic Avalanche Detector with electroluminescence gap operated in argon doped with nitrogen*, *Nucl. Instrum. Meth. A* **845** (2017) 206 [[arXiv:1605.08729](#)].
- [11] C.M.B. Monteiro, J.A.M. Lopes, J.F. C.A. Veloso and J.M.F. dos Santos, *Secondary scintillation yield in pure argon*, *Phys. Lett. B* **668** (2008) 167.
- [12] C.A.B. Oliveira et al., *A simulation toolkit for electroluminescence assessment in rare event experiments*, *Phys. Lett. B* **703** (2011) 217 [[arXiv:1103.6237](#)].
- [13] A. Buzulutskov, *Advances in Cryogenic Avalanche Detectors (review)*, *2012 JINST* **7** C02025 [[arXiv:1112.6153](#)].
- [14] A. Bondar, A. Buzulutskov, A. Dolgov, A. Grebenuk, S. Peleganchuk, V. Porosev et al., *Study of infrared scintillations in gaseous and liquid argon - Part II: light yield and possible applications*, *2012 JINST* **7** P06014 [[arXiv:1204.0580](#)].
- [15] A. Bondar, A. Buzulutskov, A. Dolgov, E. Grishnyaev, S. Polosatkin, L. Shekhtman et al., *Measurement of the ionization yield of nuclear recoils in liquid argon at 80 and 233 keV*, *Europhys. Lett.* **108** (2014) 12001.
- [16] A. Bondar, A. Buzulutskov, A. Dolgov, E. Shemyakina and A. Sokolov, *MPPC versus MRS APD in two-phase Cryogenic Avalanche Detectors*, *2015 JINST* **10** P04013 [[arXiv:1502.03663](#)].
- [17] A. Bondar, A. Buzulutskov, A. Dolgov, V. Nosov, L. Shekhtman and A. Sokolov, *Characterization of photo-multiplier tubes for the Cryogenic Avalanche Detector*, *2015 JINST* **10** P10010.
- [18] A. Bondar, A. Buzulutskov, A. Dolgov, L. Shekhtman and A. Sokolov, *X-ray ionization yields and energy spectra in liquid argon*, *Nucl. Instrum. Meth. A* **816** (2016) 119 [[arXiv:1505.02296](#)].

- [19] A. Bondar, V. Buzulutskov, A. Dolgov, E. Frolov, V. Nosov, L. Shekhtman et al., *Study of cryogenic photomultiplier tubes for the future two-phase cryogenic avalanche detector*, 2017 *JINST* **12** C05002 [[arXiv:1705.01250](#)].
- [20] <http://www.hamamatsu.com>.
- [21] A. Lyashenko, T. Nguyen, A. Snyder, H. Wang and K. Arisaka, *Measurement of the absolute Quantum Efficiency of Hamamatsu model R11410-10 photomultiplier tubes at low temperatures down to liquid xenon boiling point*, 2014 *JINST* **9** P11021 [[arXiv:1410.3890](#)].
- [22] R. Francini et al., *Tetraphenyl-butadiene films: VUV-Vis optical characterization from room to liquid argon temperature*, 2013 *JINST* **1309** C09010.
- [23] V.M. Gehman, T.M. Ito, W.C. Griffith and S.R. Seibert, *Characterization of protonated and deuterated Tetra-Phenyl Butadiene Film in a Polystyrene Matrix*, 2013 *JINST* **8** P04024 [[arXiv:1302.3210](#)].
- [24] C.H. Lally et al., *UV quantum efficiencies of organic fluors*, *Nucl. Instrum. Meth.* **B 117** (1996) 421.
- [25] Experimental Design Bureau of Automation (EDBA),  
<http://www.okba.ru/eng/produce/gasanalyzers/svet.php>.
- [26] A. Bondar, A. Buzulutskov, A. Grebenuk, A. Sokolov, D. Akimov, I. Alexandrov et al., *Direct observation of avalanche scintillations in a THGEM-based two-phase Ar avalanche detector using Geiger-mode APD*, 2010 *JINST* **5** P08002 [[arXiv:1005.5216](#)].
- [27] S. Sangiorgio et al., *First demonstration of a sub-keV electron recoil energy threshold in a liquid argon ionization chamber*, *Nucl. Instrum. Meth.* **A 728** (2013) 69 [[arXiv:1301.4290](#)].