


FISA 2 / 11

Nivel +2200 si taiere stalpi fata

~1-2 ore

CRITIC

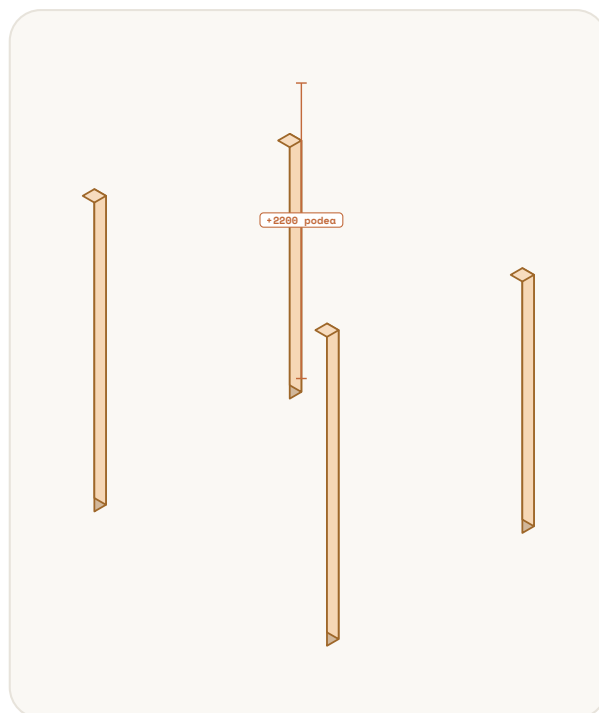

stalp grinda joista dusumea polita coltar metal diagonala/ proptea

PIESE PENTRU ACEASTA ETAPA



SCULE

Nivela cu furtun / laser

Creion

Fierastrau

Echer

PAS CU PAS

● cap surub (pe fata vazuta)

○ surub/piulita pe partea ascunsa

→ directia de insurubare


oblic = la unghi (toe-screw)

folosim **suruburi + buloane**

, nu cuie


1

Marcheaza +2200 (fata podelei) pe toti 4 stalpii. Foloseste o scandura dreapta + boloboc, nu masura separat.

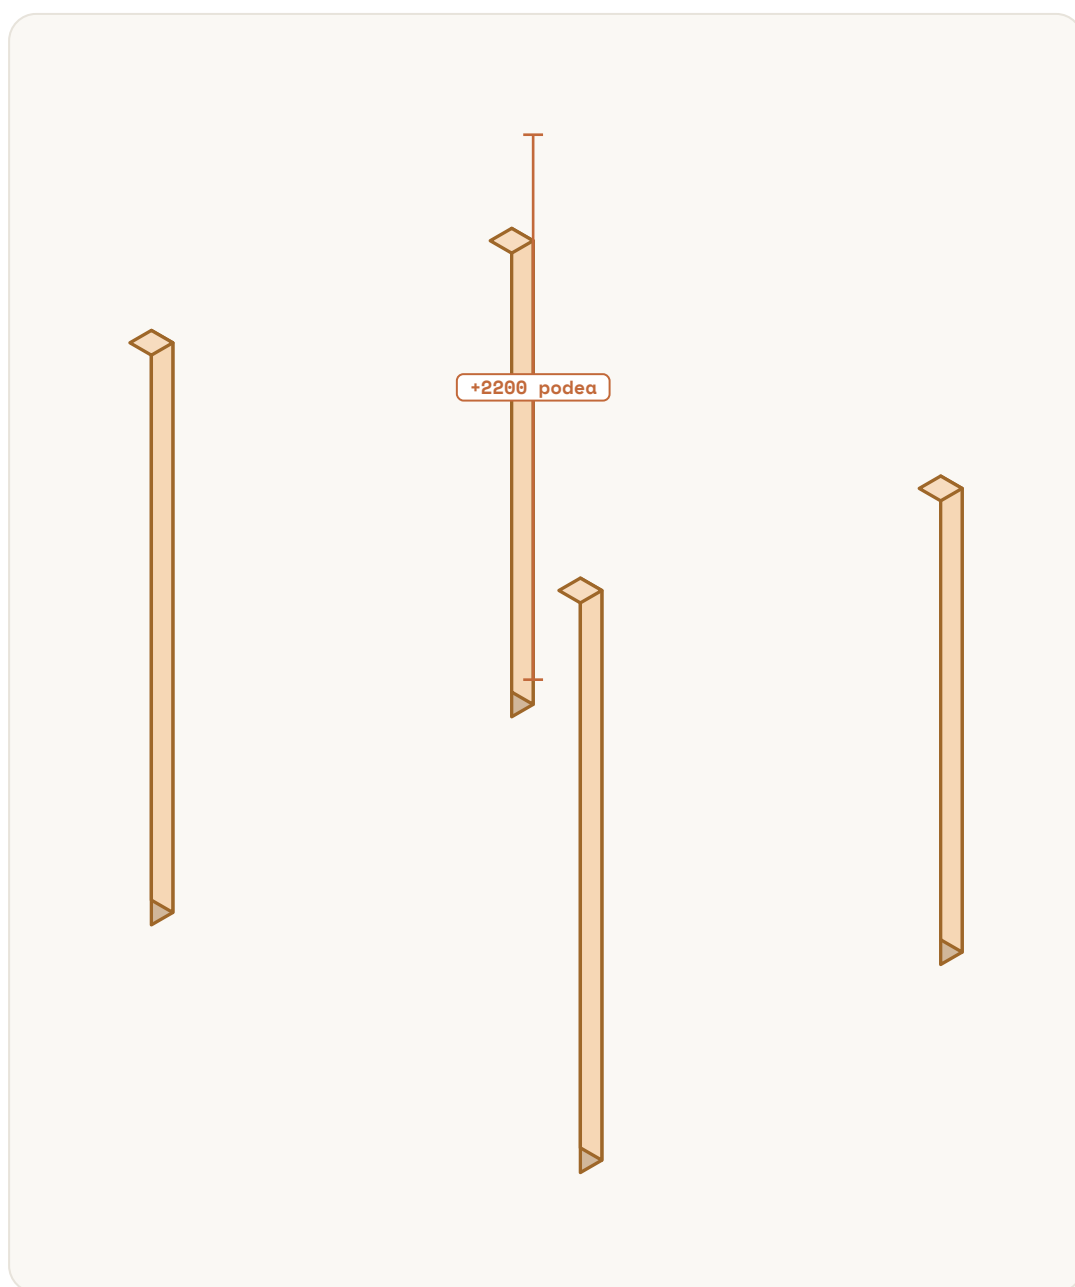

2


Coboara 328 mm si marcheaza +1872 (grinda 200 + joista 100 + dusumea 28). Acolo se sprijina podeaua.

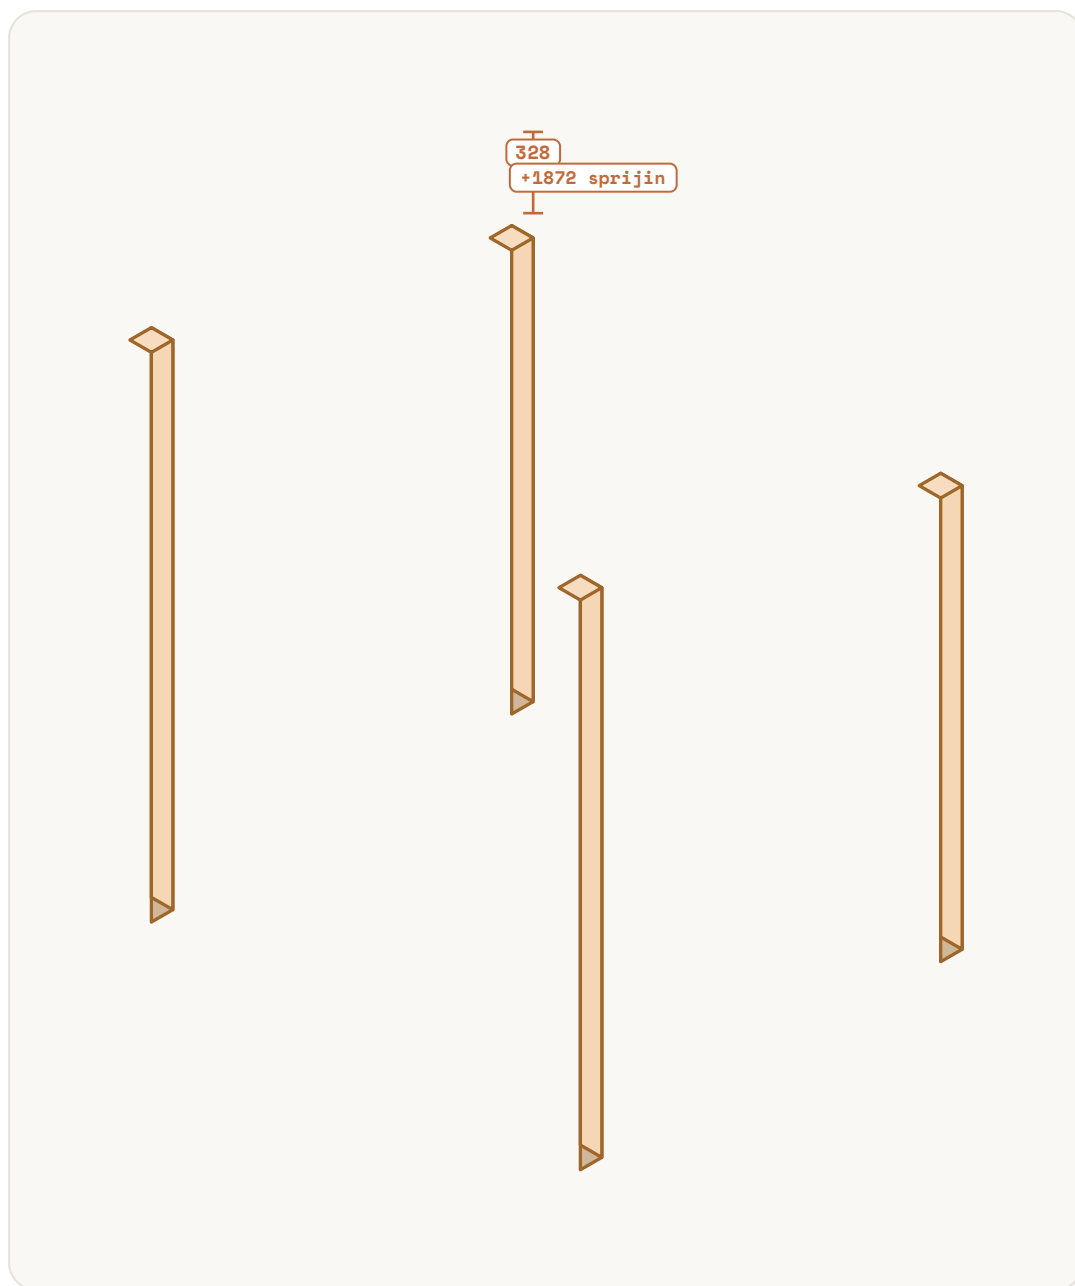

! Pas critic — verifica inainte sa mergi mai departe.




Taie DOAR stalpii din fata (S3, S4) la +1872. Partea taiata o pastrezi pentru polite. Stalpii din spate raman INTREGI.

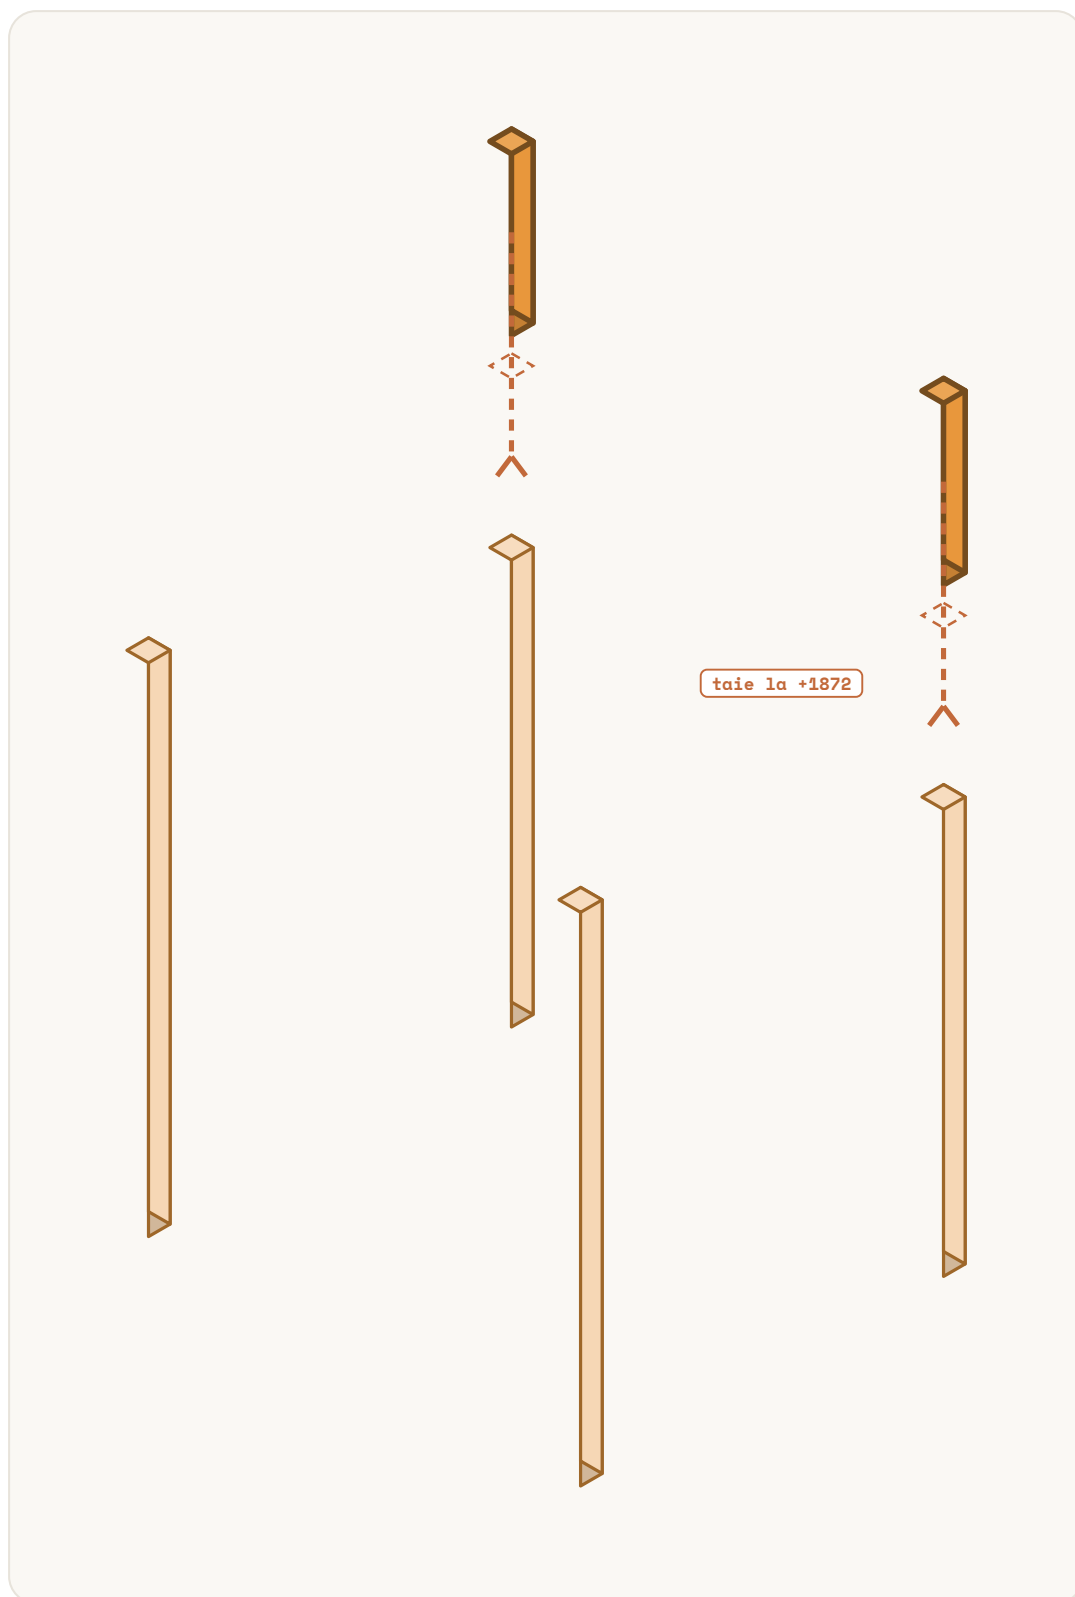

! Pas critic — verifica inainte sa mergi mai departe.

4

Teseste muchia taiata. Abia acum strange definitiv suruburile B2 de la baza.



GATA CAND

- ☐ Linia +1872 identica pe toti
 - ☐ Doar stalpii fata taiati
 - ☐ Stalpii spate INTREGI
 - ☐ Suruburi baza stranse
-