

Leading the Intelligent IP Network

Network Slicing Router, Born for Cloudification

NetEngine A821 E

One-network bearer

Network slicing for multi-service security isolation

One-hop cloud access

Cloud access upon network access, service provisioning within minutes, and intelligent selection of cloud access paths

Experience awareness

Real-time SLA visualization through IFIT, the industry's only in-band flow measurement technology

Plug and play

Single site visit, install-and-play, and automated service rollout



NetEngine A821 E (Single AC)



NetEngine A821 E (Dual AC)




NetEngine A821 E (AC+DC)



Product Introduction

Huawei's NetEngine A821 E is an enterprise-side router designed for the cloud era. It offers a wide range of advantages, such as easy deployment, simple O&M, high performance, and strong reliability, helping enterprises quickly access various networks. In addition, it can be managed and controlled by Huawei's iMaster NCE and supports features such as FlexE network slicing, SRv6, IFIT, L2VPN, L3VPN, EVPN, meeting fast and high-quality cloudification requirements of enterprises.

Application Scenario

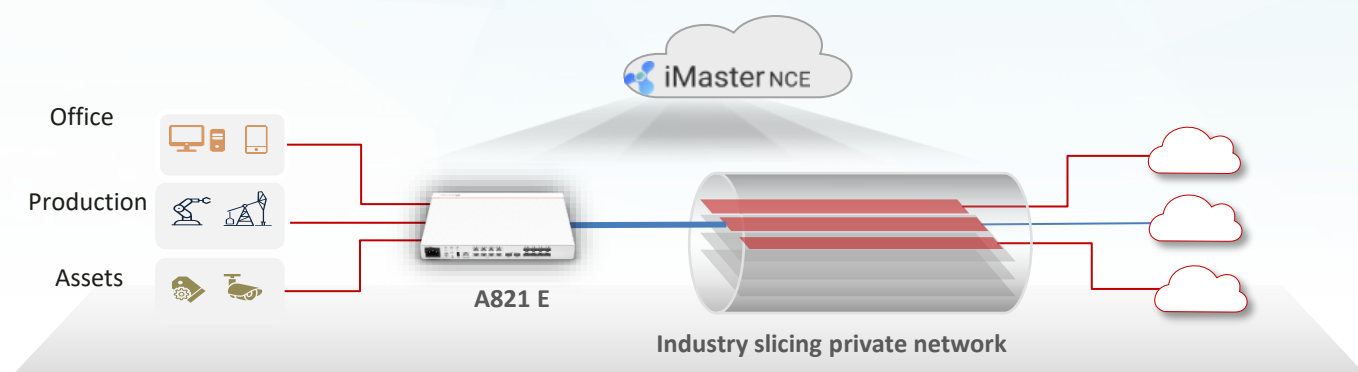

Product Specifications

Specifications	A821 E
Dimensions (H x W x D)	43.6 mm x 320 mm x 220 mm (1.72 in. x 12.60 in. x 8.66 in.)
Cabinet depth	≥ 300 mm
Interface type	2 x 10GE + 8 x GE/FE (optical) + 8 x GE/FE (electrical)
Switching capacity	72G
Height	1U
Weight	2.7 kg (5.95 lb)
SDRAM	4 GB
Typical power consumption	69.87 W
Power redundancy	Single AC/Dual AC/AC+DC
Heat dissipation mode	System air cooling
Built-in fan module	3
Operating temperature	–40°C to +65°C (–40°F to +149°F)

For detailed specifications, please go to [info-finder](#).

Leading the Intelligent IP Network

Network Slicing Router, Born for Cloudification

NetEngine A813 E

One-network bearer

Network slicing for multi-service security isolation

One-hop cloud access


Cloud access upon network access, service provisioning within minutes, and intelligent selection of cloud access paths

Experience awareness

Real-time SLA visualization through IFIT, the industry's only in-band flow measurement technology

Plug and play

Single site visit, install-and-play, and automated service rollout

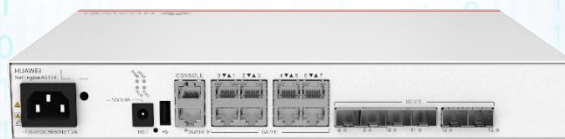

NetEngine A813E (Single AC)



NetEngine A813E (Dual AC)




NetEngine A813E (AC+DC)



Product Introduction

Huawei's NetEngine A813 E is an enterprise-side router designed for the cloud era. It offers a wide range of advantages, such as easy deployment, simple O&M, high performance, and strong reliability, helping enterprises quickly access various networks. In addition, it can be managed and controlled by Huawei's iMaster NCE and supports features such as network slicing, SRv6, IFIT, L3VPN, EVPN, meeting fast and high-quality cloudification requirements of enterprises.

Application Scenario

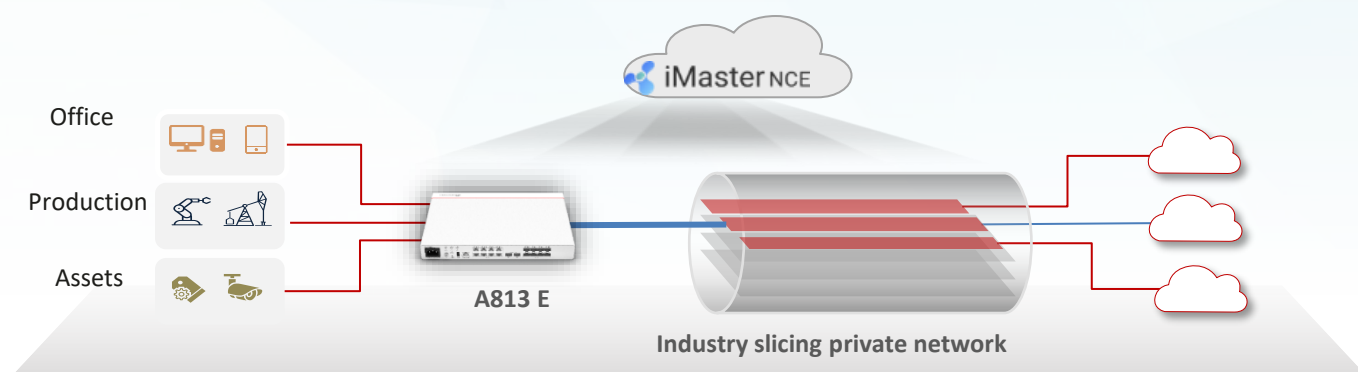

Product Specifications

Specifications	A813 E
Dimensions (H x W x D)	43.6 mm x 320 mm x 220 mm (1.72 in. x 12.60 in. x 8.66 in.)
Cabinet depth	≥ 300 mm
Interface type	6*GE/FE (optical) + 8 x GE/FE (electrical)
Switching capacity	14G
Height	1U
Weight	2.3 kg (5.07 lb)
SDRAM	4 GB
Typical power consumption	32.7 W
Power redundancy	Single AC/Dual AC/AC+DC
Heat dissipation mode	System air cooling
Built-in fan module	2
Operating temperature	-5°C to +55°C (23.0°F to 131.0°F)

For detailed specifications, please go to [info-finder](#).

Leading the Intelligent IP Network

Network Slicing Router, Born for Cloudification

NetEngine A822 E

One-network bearer

Network slicing for multi-service security isolation

One-hop cloud access


Cloud access upon network access, service provisioning within minutes, and intelligent selection of cloud access paths

Experience awareness

Real-time SLA visualization through IFIT, the industry's only in-band flow measurement technology

Plug and play

Single site visit, install-and-play, and automated service rollout

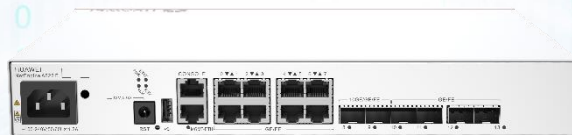

NetEngine A822 E (Single AC)



NetEngine A822 E (Dual AC)




NetEngine A822 E (AC+DC)



Product Introduction

Huawei's NetEngine A822 E is an enterprise-side router designed for the cloud era. It offers a wide range of advantages, such as easy deployment, simple O&M, high performance, and strong reliability, helping enterprises quickly access various networks. In addition, it can be managed and controlled by Huawei's iMaster NCE and supports features such as network slicing, SRv6, IFIT, L3VPN, EVPN, meeting fast and high-quality cloudification requirements of enterprises.

Application Scenario

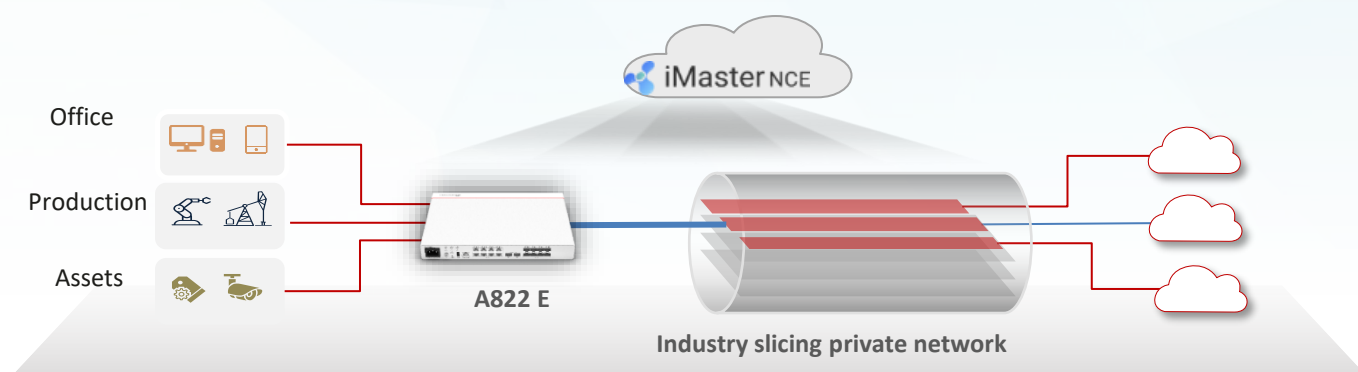

Product Specifications

Specifications	A822 E
Dimensions (H x W x D)	43.6 mm x 320 mm x 220 mm (1.72 in. x 12.60 in. x 8.66 in.)
Cabinet depth	≥ 300 mm
Interface type	2*10GE+4*GE/FE (optical) + 8 x GE/FE (electrical)
Switching capacity	32G
Height	1U
Weight	2.3 kg (5.07 lb)
SDRAM	4 GB
Typical power consumption	35 W
Power redundancy	Single AC/Dual AC/AC+DC
Heat dissipation mode	System air cooling
Built-in fan module	2
Operating temperature	-5°C to +55°C (23.0°F to 131.0°F)

For detailed specifications, please go to [info-finder](#).

Leading the
Intelligent IP
Network

IPv6+ 1000-dollar devices, creating the optimal cost-effective network construction solution

NetEngine A816 E

Converged bearer

Network slicing
Multi-service security isolation

Secure and reliable

Supports Xsec encryption.
Secure Encryption to the Edge

Green and energy saving

No fan, natural heat dissipation
Low power consumption and
energy saving

Dual-mode switchover


SRv6/MPLS dual-mode
switchover, meeting requirements
in different service scenarios



NetEngine A816 E (one AC)



NetEngine A816 E (Dual AC)




NetEngine A816 E (one AC + one DC)



Product Description

Huawei NetEngine A816 E integrated service access router is a product launched by Huawei for the cloud era. It is easy to deploy, maintain, and reliable, product is very cost-effective, iMaster NCE can manage the network in a unified manner. It also supports various features, such as slicing, SRv6, iFIT, L3VPN, EVPN, Xsec, and video assurance, meeting enterprises' requirements for fast and high-quality access.

Application Scenario

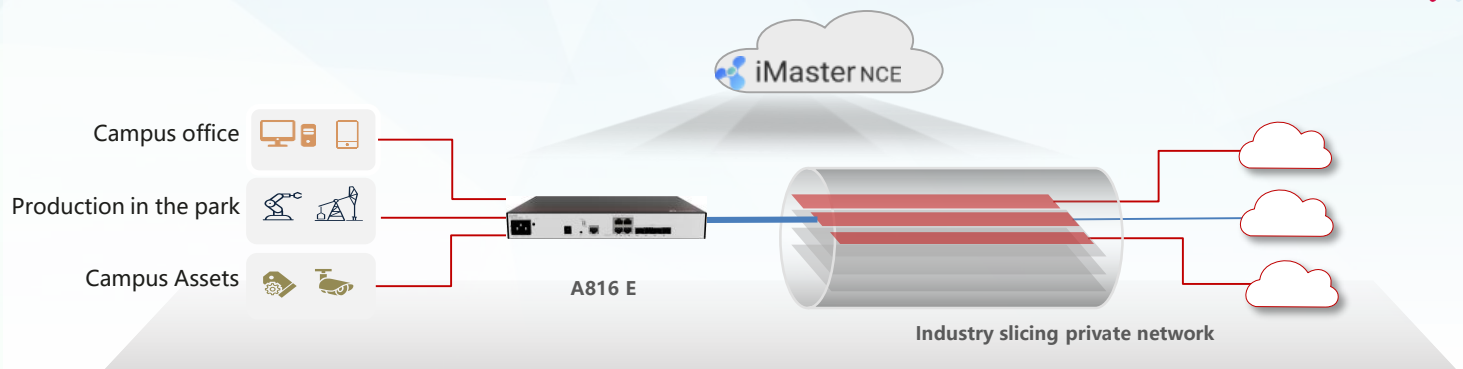

Product Specification

Specifications	A816 E
Dimensions (W x D x H)	320 mm x 220 mm x 43.6 mm (1U)
Cabinet Depth	≥300 mm
Interface Type	4*GE/FE (optical) + 4*GE/FE (electrical)
Switching capacity	64 - 172 Gbit/s
Packet forwarding rate	112 - 246 Mpps
heights	1U
Typical power consumption	24 W
Weight	2.0 kg
Power Redundancy	Single AC, dual AC, single AC+single DC
Power Input	AC: 100 V-240 V DC: ±48 V/+24 V to 12 V
Heat Dissipation Mode	Natural heat dissipation
Operating temperature	-5°C - 50°C
MPLS	LDP, EVPN VLL/VPLS ()
Segment Routing	SRv6 BE, SRv6 Policy
IPSEC	20Mbps@512Byte
Xsec	support
Network Slicing	channelized sub-interface
NAT	20Mbps@512Byte
Service Visualization	TWAMP, IFIT(Only in Srv6 Mode)

Note: The MPLS and SRv6 models need to be switched using commands. The two functions are not supported at the same time. After the switchover, the device needs to be restarted.