

Huawei NetEngine AR610 Series Enterprise Routers

Huawei AR610 series enterprise routers are routers designed for use in mini enterprise branches. The AR610 integrates various service features such as SD-WAN, routing, switching, security, and WLAN, providing diversified services and high performance.

Product Overview

Huawei's next-generation NetEngine AR610 series enterprise routers use multi-core processors and a non-blocking switching structure, helping to deliver three times the industry average performance. The NetEngine AR610 also integrates functions such as SD-WAN, cloud management, routing, switching, VPN, WLAN, and security, ensuring diversified and cloud-based services are fully supported. Huawei NetEngine AR610 series enterprise routers can be deployed in mini enterprise branches as required to provide enterprise network egress capabilities.

The NetEngine AR610 series consists of models such as the NetEngine AR611, NetEngine AR617, NetEngine AR611W, NetEngine AR611-LTE4EA, NetEngine AR617-LTE4EA, NetEngine AR611W-LTE6EA, NetEngine AR617VW, NetEngine AR617VW-LTE4EA, NetEngine AR617VW-LTE4, NetEngine AR611E, NetEngine AR611E-LTE4EA, NetEngine AR611EW, NetEngine AR617EVW, NetEngine AR617E-LTE4EA and NetEngine AR617EVW-LTE4EA. Huawei provides various models which can meet networking requirements of enterprises of different scales.

 NetEngine AR611	- Fixed WAN ports: 1 x GE Combo - Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) - Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617	- Fixed WAN ports: 1 x GE Combo, 1 x VDSL2 - Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) - Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR611W	- Fixed WAN ports: 1 x GE Combo - Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) - Wi-Fi 5: 802.11 a/b/g/n/ac (2.4G + 5G) - Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm

 NetEngine AR611-LTE4EA	• Fixed WAN ports: 1 x GE Combo, 1 x LTE4EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x SIM cards (active/standby) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617-LTE4EA	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2, 1 x LTE4EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x SIM cards (active/standby) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR611W-LTE6EA	• Fixed WAN ports: 1 x GE Combo, 1 x LTE6EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • Wi-Fi 5: 802.11 a/b/g/n/ac (2.4G + 5G) • 2 x SIM cards (active/standby) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617VW	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2 • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x FXS • Wi-Fi 5: 802.11 a/b/g/n/ac (2.4G + 5G) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617VW-LTE4EA NetEngine AR617VW-LTE4*	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2, 1 x LTE • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x FXS • 2 x SIM cards (active/standby) • Wi-Fi 5: 802.11 a/b/g/n/ac (2.4G + 5G) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR611E	• Fixed WAN ports: 1 x GE Combo • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR611E-LTE4EA	• Fixed WAN ports: 1 x GE Combo, 1 x LTE4EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x SIM cards (active/standby) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm

 NetEngine AR611EW	• Fixed WAN ports: 1 x GE Combo • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • Wi-Fi 6: 802.11 a/b/g/n/ac/ax (2.4G + 5G) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617E-LTE4EA	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2, 1 x LTE4EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x SIM cards (active/standby) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617EVW	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2 • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x FXS • 2 x SIM cards (active/standby) • Wi-Fi 6: 802.11 a/b/g/n/ac/ax (2.4G + 5G) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm
 NetEngine AR617EVW-LTE4EA	• Fixed WAN ports: 1 x GE Combo, 1 x VDSL2, 1 x LTE4EA • Fixed LAN ports: 4 x GE electrical (all can be switched to WAN ports) • 2 x FXS • 2 x SIM cards (active/standby) • Wi-Fi 6: 802.11 a/b/g/n/ac/ax (2.4G + 5G) • Dimensions (H x W x D): 38.0 mm x 240.0 mm x 161.5 mm

*Note: NetEngine AR617VW-LTE4 is sold only in Latin America.

Features and Benefits

Features and Benefits

Service Requirement	Features and Benefits
High performance	• Integrates the ARM multi-core processor, LSW switching chip, and hardware encryption/decryption engine, based on the self-developed SOC chip architecture. • Three times the industry average performance, providing the lowest latency for key services
High reliability	• Link backup for enterprise services, improving reliability • Fault detection and determination in milliseconds, minimizing service interruption time
Easy O&M	Multiple management modes, including SD-WAN management, SNMP-based network

Service Requirement	Features and Benefits
	management, web-based network management, and cloud-based management, simplifying network deployment and reducing OPEX
Service convergence	Integration of functions such as routing, switching, VPN, security, and WLAN, meeting diversified enterprise service requirements, saving space, and reducing TCO
Security	Built-in firewall and multiple VPN technologies, providing comprehensive security protection capabilities
SD-WAN	- Built-in SD-WAN solution, building cost-effective and business-friendly connections over the Internet - ZTP (Email-, USB-, DHCP-based and Registration Query Center deployment), minimizing skill requirements and provisioning devices in minutes - First packet identification (FPI) for SaaS applications and service awareness for complex applications, identifying over 90% of applications - Traffic steering based on bandwidth and link quality, ensuring experience of key applications and improving bandwidth utilization to up to 90%

Architecture Highlights

Architecture Feature	Benefits
Multi-core processor	High-performance multi-core processors, supporting high-speed WAN connections, powerful route calculation capabilities, and enhanced L4-L7 service processing
Extensive network interfaces	Extensive flexible interface such as 10M/100M/GE speed, LTE CAT4/CAT6, 3G, xGPON, VDSL/ADSL, Voice FXS, and Wi-Fi 5/6

Product Specifications

NetEngine AR610 Series Technical Specifications

Item	AR611 /AR611W	AR617	AR611- LTE4EA	AR617- LTE4EA	AR611W- LTE6EA	AR617VW	AR617VW- LTE4EA /AR617VW- LTE4
System Parameters							
Forwarding performance (Full duplex, NAT + ACL + QoS, IMIX)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps

Item	AR611 /AR611W	AR617	AR611- LTE4EA	AR617- LTE4EA	AR611W- LTE6EA	AR617VW	AR617VW- LTE4EA /AR617VW- LTE4
IPsec performance (IMIX)	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps
IPsec performance (1400 bytes)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
IPv4 Forwarding performance (IMIX)	800 Mbps	800 Mbps	800 Mbps	800 Mbps	800 Mbps	800 Mbps	800 Mbps
SD-WAN IPsec performance* (IMIX)	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps
SD-WAN IPsec performance*(1400 bytes)	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps
SD-WAN performance** (IMIX)	80 Mbps	80 Mbps	80 Mbps	80 Mbps	80 Mbps	80 Mbps	80 Mbps
SD-WAN performance** (1400 bytes)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
SD-WAN typical performance*** (IMIX)	50 Mbps	50 Mbps	50 Mbps	50 Mbps	50 Mbps	50 Mbps	50 Mbps
SD-WAN typical performance*** (1400 bytes)	250 Mbps	250 Mbps	250 Mbps	250 Mbps	250 Mbps	250 Mbps	250 Mbps
Fixed WAN ports	1 x GE combo	1 x GE combo, 1 x VDSL2	1 x GE combo, 1 x LTE CAT4	1 x GE combo, 1 x VDSL2, 1 x LTE CAT4	1 x GE combo, 1 x LTE CAT6	1 x GE combo, 1 x VDSL2	1 x GE combo, 1 x VDSL2, 1 x LTE CAT4
Fixed LAN ports	4 x GE electrical (All LAN ports can be switched to WAN ports)						
xDSL	-	ADSL Annex A, M, B and J, T1.413 ANSI ADSL	-	ADSL Annex A, M, B and J, T1.413 ANSI ADSL DMT issue 2,	-	ADSL Annex A, M, B and J, T1.413 ANSI ADSL DMT issue 2, ITU G.993.2 (VDSL2), VDSL2 Vectoring (G993.5)	

Item	AR611 /AR611W	AR617	AR611- LTE4EA	AR617- LTE4EA	AR611W- LTE6EA	AR617VW	AR617VW- LTE4EA /AR617VW- LTE4
		DMT issue 2, ITU G.993.2 (VDSL2), VDSL2 Vectoring (G993.5)		ITU G.993.2 (VDSL2), VDSL2 Vectoring (G993.5)			
Voice	-	-	-	-	-	2 x FXS (RTP, SIP, SIP AG, IP PBX/TDM PBX, VoIP, SBC)	
Wi-Fi 5	AR611W: Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g /n/ac	-	-	-	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac		
Wi-Fi rate	866 Mbps	-	-	-	866 Mbps		
3G/LTE	-	-	LTE CAT4	LTE CAT4	LTE CAT6	-	LTE CAT4
5G RU	Supported						
Console port	1 x RJ45 console port						
USB port	1 x USB 2.0						
Memory	1 GB						
Flash	1 GB						
Dimensions and Weight							
Dimensions without packaging (H x W x D)	38.0 mm x 240.0 mm x 161.5 mm						
Weight without packaging	AR611: 0.58 kg AR611W: 0.6 kg	0.63 kg	0.85 kg	0.69 kg	0.66 kg	0.63 kg	0.69 kg
Installation type	Work bench, against the wall						

Item	AR611 /AR611W	AR617	AR611- LTE4EA	AR617- LTE4EA	AR611W- LTE6EA	AR617VW	AR617VW- LTE4EA /AR617VW- LTE4
Power Specifications, Power Consumption, and Heat Dissipation							
Rated input voltage (V)	110 V to 220 V, 50 Hz/60 Hz						
Input voltage range (V)	90 V to 270V, 45 Hz to 65 Hz						
Maximum input current (A)	0.8 A						
Maximum output power (W)	24 W						
Typical power consumption (W)	AR611: 8 W AR611W: 9.6 W	15.5 W	14 W	17.5 W	14 W	11.2 W	13.6 W
Maximum power consumption (W)	12 W	16.8 W	17 W	18.8 W	16 W	14 W	17 W
Fan module	Natural heat dissipation, without fans						
Noise	0 (Natural heat dissipation)						
Environment Parameters							
Operating temperature	0 °C to 40 °C						
Operating humidity	5% to 95% (non-condensing)						
Operating altitude	< 5000 m						
Storage temperature	−40 °C to +70 °C						

*: Scenario where the SD-WAN IPsec performance specification applies: IPsec. This specification applies to the combined total of traffic in inbound and outbound directions.

** : Scenario where the SD-WAN performance specification applies: IPsec + QoS. This specification applies to the combined total of traffic in inbound and outbound directions.

***: Scenario where the typical SD-WAN typical performance specification applies: IPsec + QoS + SA + AppFlow. This specification applies to the combined total of traffic in inbound and outbound directions.

Item	AR611E	AR611E-LTE4EA	AR611EW	AR617E-LTE4EA	AR617EVW	AR617EVW-LTE4EA
System Parameters						
Forwarding performance (Full duplex, NAT + ACL + QoS, IMIX)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
IPv4 Forwarding performance (IMIX)	800 Mbps	800 Mbps	800 Mbps	800 Mbps	800 Mbps	800 Mbps
IPsec performance (IMIX)	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps
IPsec performance (1400 bytes)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
SD-WAN IPsec performance* (IMIX)	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps	200 Mbps
SD-WAN IPsec performance* (1400 bytes)	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps	400 Mbps
SD-WAN performance** (IMIX)	80 Mbps	80 Mbps	80 Mbps	80 Mbps	80 Mbps	80 Mbps
SD-WAN performance** (1400 bytes)	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
SD-WAN typical performance*** (IMIX)	50 Mbps	50 Mbps	50 Mbps	50 Mbps	50 Mbps	50 Mbps
SD-WAN typical performance*** (1400 bytes)	250 Mbps	250 Mbps	250 Mbps	250 Mbps	250 Mbps	250 Mbps
Fixed WAN ports	1 x GE combo					
Fixed LAN ports	4 x GE electrical (All LAN ports can be switched to WAN ports)					
Built-in 3G/LTE	-	LTE CAT4, 2 x SIM cards (active/standby)	-	LTE CAT4, 2 x SIM cards (active/standby)	-	LTE CAT4, 2 x SIM cards (active/standby)

Item	AR611E	AR611E-LTE4EA	AR611EW	AR617E-LTE4EA	AR617EVW	AR617EVW-LTE4EA
5G RU	Supported	Supported	Supported	Supported	Supported	Supported
xDSL	-	-	-	ADSL Annex A, M, B and J, T1.413 ANSI ADSL DMT issue 2, ITU G.993.2 (VDSL2), VDSL2 Vectoring (G993.5)		
Voice	-	-	-	-	2 x FXS (RTP, SIP, SIP AG, IP PBX/TDM PBX, VoIP, SBC)	
Wi-Fi 6	-	-	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac/ax	-	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac/ax	
Wi-Fi rate	-	-	573.5 Mbps @ 2.4 GHz and 2401.9 Mbps @ 5 GHz	-	573.5 Mbps @ 2.4 GHz and 2401.9 Mbps @ 5 GHz	
Console port	1 x RJ45 console port	1 x RJ45 console port	1 x RJ45 console port	1 x RJ45 console port	1 x RJ45 console port	1 x RJ45 console port
USB port	1 x USB 2.0	1 x USB 2.0	1 x USB 2.0	1 x USB 2.0	1 x USB 2.0	1 x USB 2.0
Memory	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB
Flash	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB
Dimensions and Weight						
Dimensions without packaging (H x W x D)	38.0 mm x 240.0 mm x 161.5 mm					
Weight without packaging	0.547 kg	0.628 kg	0.579 kg	0.629 kg	0.773 kg	0.821 kg
Installation type	Work bench, against the wall					
Power Specifications, Power Consumption, and Heat Dissipation						
Rated input voltage (V)	100 V to 240 V, 50 Hz/60 Hz					
Input voltage range (V)	90 V to 264 V, 45 Hz to 65 Hz					

Item	AR611E	AR611E-LTE4EA	AR611EW	AR617E-LTE4EA	AR617EVW	AR617EVW-LTE4EA
Maximum input current (A)	AD-120300C0W: 1.5 A AD-120200E0W: 1 A AD-120200B0W: 1 A AD-120200U1W: 1 A					
Maximum output power (W)	AD-120300C0W: 36 W AD-120200E0W: 24 W AD-120200B0W: 24 W AD-120200U1W: 24 W					
Typical power consumption (W)	5.06 W	8.24 W	10.8 W	9.1 W	14.08 W	15.77 W
Maximum power consumption (W)	5.95 W	9.7 W	12.71 W	10.71 W	16.57 W	18.55 W
Fan module	Natural heat dissipation, without fans					
Noise	0 (Natural heat dissipation)					
Environment Parameters						
Operating temperature	0 °C to 40 °C					
Operating humidity	5% to 95% (non-condensing)					
Operating altitude	< 5000 m					
Storage temperature	−40 °C to +70 °C					

*: Scenario where the SD-WAN IPsec performance specification applies: IPsec. This specification applies to the combined total of traffic in inbound and outbound directions.

** : Scenario where the SD-WAN performance specification applies: IPsec + QoS. This specification applies to the combined total of traffic in inbound and outbound directions.

***: Scenario where the typical SD-WAN typical performance specification applies: IPsec + QoS + SA + AppFlow. This specification applies to the combined total of traffic in inbound and outbound directions.

Software Features and Protocols

Features and Protocols	
Basic function	DHCPv4 server/client/relay, DHCPv6 server/client/relay, PPPoE server/client, PPPoA server/client, PPPoEoA server/client, NAT, interface management, and DNS
LAN	IEEE 802.1P, IEEE 802.1Q, IEEE 802.3, VLAN management, VLAN aggregation, MAC management,

	STP/RSTP/MSTP, and QinQ
WLAN (AP)	AP management, WLAN user management, WLAN radio management (802.11a/b/g/n/ac), WLAN QoS (WMM), and WLAN security (WEP, WPA, WPA2, key management) (supported by the AR611W, AR611W-LTE4EA, AR617VW, AR617VW-LTE4, AR617VW-LTE4EA, AR611EW, AR617EVW and AR617EVW-LTE4EA)
IPv4 unicast routing	Routing policies, static routes, RIP, OSPF, IS-IS, BGP, and IP FRR
IPv6 unicast routing	Static routes, routing policies, RIPng, OSPFv3, IS-ISv6, and BGP4+
Basic IPv6 function	IPv6 ND, IPv6 PMTU, IPv6 FIB, IPv6 ACL, ICMPv6, DNSv6, DHCPv6, and PPPoE client IPv6
IPv6 tunneling	IPv6 over IPv4 manual tunnel, automatic tunnel, GRE tunnel, IPv6 over IPv4 tunnel, 6to4, and ISATAP
Multicast	IGMP v1/v2/v3, PIM-SM, PIM-DM, MSDP, MBGP, IPv6 PIM, MLD
VPN	IPsec VPN, GRE, Ethernet over GRE, DSVPN, A2A VPN, L2TP VPN, L2TPv3 VPN, VXLAN, SD-WAN EVPN
QoS	DiffServ mode, priority mapping, traffic policing (CAR), traffic shaping, congestion avoidance, congestion management, MQC (traffic classifier, traffic behavior, and traffic policy), hierarchical QoS, WLAN QoS, FR QoS, and Smart Application Control (SAC)
Security	ACL (v4/v6), domain-based stateful firewall, 802.1X authentication, MAC address authentication, portal authentication, AAA authentication, RADIUS authentication, HWTACACS authentication, PKI, broadcast storm suppression, ARP security, ICMP attack defense, URPF, CPCAR, blacklist, attack source tracing and online behavior management.
Management and maintenance	Upgrade management, device management, web-based network management, GTL, SNMP (v1/v2c/v3), RMON, NTP, CWMP, Auto-Config, URL-based/USB-based/DHCP deployment, NETCONF/YANG, CLI, Netstream, IP FPM, TCP FPM, TWAMP Light, IP accounting, and NQA

Safety and Regulatory Standards


Safety and Regulatory Standards	
EMC standards compliance	CISPR32 Class A EN 55032 Class A CISPR24 EN 55024 ETSI EN 300 386 ETSI EN 301 489-1 ETSI EN 301 489-17 ETSI EN 301 489-52
Environmental standards compliance	RoHS REACH WEEE
Safety standards	IEC 60950-1

Networking and Application

- **SD-WAN Using Hybrid Links**


In the SD-WAN Solution, the NetEngine AR610 functions as the gateway of mini enterprise branches and supports hybrid access using multiple physical links, such as Internet links, and LTE links. The solution also leverages Huawei's next-generation controller, the iMaster NCE, which implements centralized and visualized management. The NetEngine AR610 provides extensive SD-WAN features and delivers optimal service experience for enterprises through intelligent application identification, intelligent traffic steering, and intelligent acceleration. For details about Huawei SD-WAN Solution, visit <https://e.huawei.com/en/solutions/enterprise-network/campus-network/sd-wan>.

SD-WAN networking

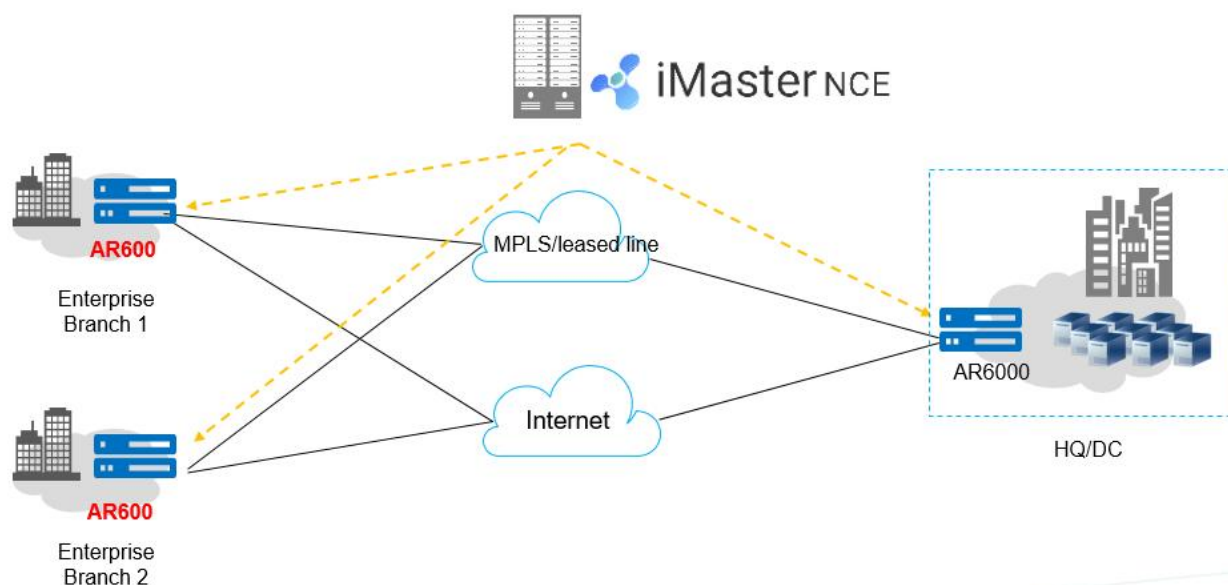

- **WAN Interconnection Scenario**


In this scenario, the NetEngine AR610 series routers are used as enterprise branch egresses and provide flexible WAN access methods to support remote network connections. A single NetEngine AR610 router can satisfy different access requirements, for example, for the private line, Ethernet, 3G, LTE, and WLAN access, helping the customer reduce deployment and maintenance costs while helping them extract much value.

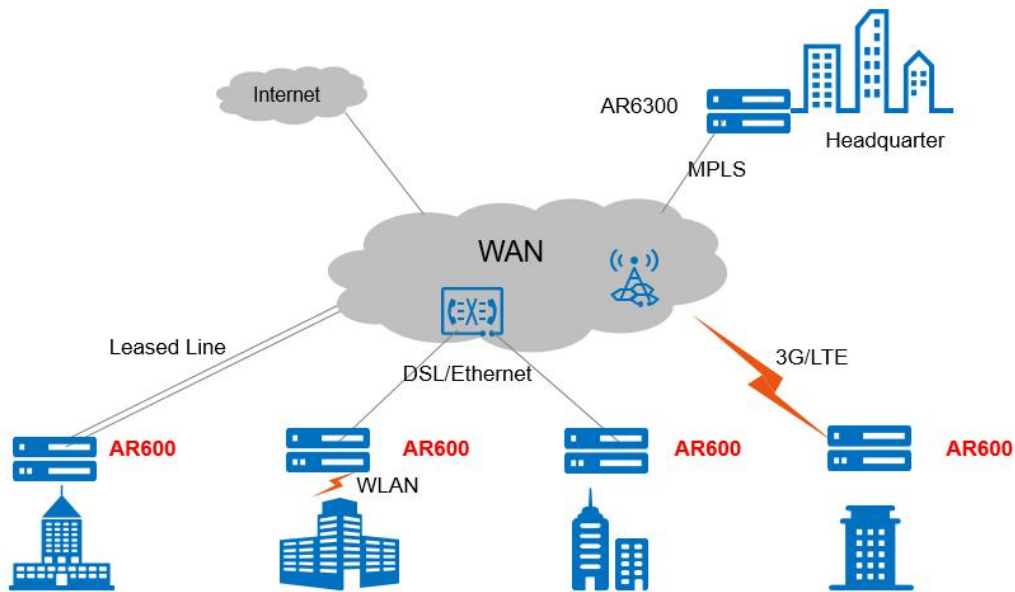

- **Building Different Types of VPNs by Leveraging Internet Resources**

The NetEngine AR610 provides various secure access functions for communication between enterprise branches and between branches and headquarters. These functions also allow an enterprise's partners to access its resources. Secure tunnels such as GRE VPN, IPSec VPN, DSVPN, L2TP VPN, and EVPN tunnels can be set up between the headquarters and branches for secure data access and transmission. The NetEngine AR610 supports quick tunnel deployment and authentication for branches. Furthermore, partners authenticated and authorized by the AR610 can remotely access the enterprise resources over these tunnels.

VPN networking

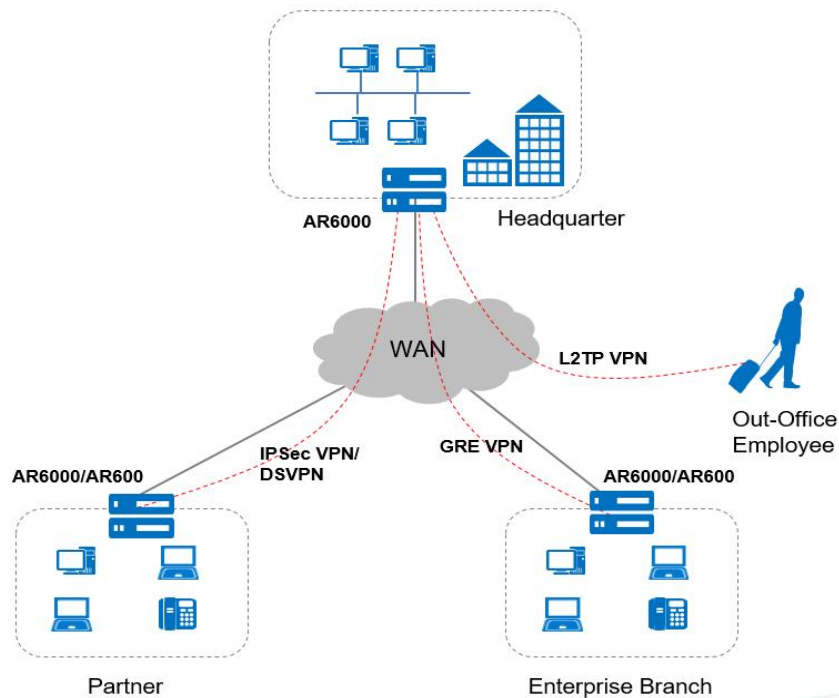

Ordering Information

The configuration of the NetEngine AR610 series includes device model selection and software configuration.

- Device model

Select the device model according to the uplink interface type and service requirements.

- Software

The NetEngine AR610 series software consists of the basic software and licensed software.

Ordering Components

Host	Description
AR611	AR611, 1*GE COMBO WAN, 4*GE LAN, 1*USB 2.0
AR617	AR617, 1*GE COMBO WAN, 4*GE LAN, 1*VDSL2, 1*USB 2.0
AR611W	AR611W, 1*GE COMBO WAN, 4*GE LAN, 1*USB 2.0, Wi-Fi 2.4G+5G
AR611-LTE4EA	AR611-LTE4EA, 1*GE COMBO WAN, 4*GE LAN, 1*USB 2.0, 1*LTE
AR617-LTE4EA	AR617-LTE4EA, 1*GE COMBO WAN, 4*GE LAN, 1*VDSL2, 1*USB 2.0, 1*LTE
AR611W-LTE6EA	AR611W-LTE6EA, 1*GE COMBO WAN, 4*GE LAN, 1*USB 2.0, 1*LTE, Wi-Fi 2.4G+5G
AR617VW	AR617VW, 1*GE COMBO WAN, 4*GE LAN, 1*VDSL2, 2*FXS, 1*USB 2.0, Wi-Fi 2.4G+5G
AR617VW-LTE4EA	AR617VW-LTE4EA, 1*GE COMBO WAN, 4*GE LAN, 1*VDSL2, 2*FXS, 1*USB 2.0, 1*LTE, Wi-Fi 2.4G+5G
AR617VW-LTE4	AR617VW-LTE4, 1*GE COMBO WAN, 4*GE LAN, 1*VDSL2, 2*FXS, 1*USB 2.0, 1*LTE, Wi-Fi 2.4G+5G
AR611E	AR611E, 1*GE COMBO WAN, 4*GE LAN, 1*USB 2.0
AR611E-LTE4EA	AR611E-LTE4EA, 1*GE Combo WAN, 4*GE Copper LAN, 1*LTE4EA, 1*USB 2.0
AR611EW	AR611EW, 1*GE Combo WAN, 4*GE Copper LAN, Wi-Fi6 2.4G+5G, 1*USB 2.0
AR617E-LTE4EA	AR617E-LTE4EA, 1*GE Combo WAN, 4*GE Copper LAN, 1*VDSL2, 1*LTE4EA, 1*USB 2.0
AR617EVW	AR617EVW, 1*GE Combo WAN, 4*GE Copper LAN, 1*VDSL2, 2*FXS, Wi-Fi6 2.4G+5G, 1*USB 2.0
AR617EVW-LTE4EA	AR617EVW-LTE4EA, 1*GE Combo WAN, 4*GE Copper LAN, 1*VDSL2, 2*FXS, 1*LTE4EA, Wi-Fi6 2.4G+5G, 1*USB 2.0

License Functions and Description

Software Sales Model	License	Ordering Information
Independent Sale Model	LAR0PONE01	AR600&6100&6200&6300 Passive Optical Network Value-added Package, including: • Passive optical modules S600E and S800E are supported

N1 Model	N1-Campus-F-610/630	N1-CloudCampus(exclude SD-WAN),Foundation,AR610/AR630 Series,Per Device
	N1-LANWAN-F-610/630	N1-CloudCampus SD-WAN(include SD-WAN),Foundation,AR610/AR630 Series,Per Device
	N1-LANWAN-A-610/630	N1-CloudCampus SD-WAN(include SD-WAN),Advanced,AR610/AR630 Series,Per Device

Other Information

Built-in LTE Model Name	Supported Standards and Frequency Bands
AR611-LTE4EA	•LTE FDD: bands 1/3/5/7/8/20/28 •LTE TDD: bands 38/40/41 •WCDMA: bands 1/5/8 •GSM: 900/1800 (MHz)
AR611W-LTE6EA	•LTE FDD: B1/B3/B5/B7/B8/B20/B28/B32 •LTE TDD: B38/B40/B41 •2 x CA: B1+B1/B5/B8/B20/B28 B3+B3/B5/B7/B8/B20/b28 B7+B5/B7/B8/B20/B28 B20+B32 B38+B38 B40+B40 B41+B41 •WCDMA: B1/B3/B5/B8
AR617-LTE4EA	•LTE FDD: Band 1/3/7/8/20/28 •LTE TDD: Band 38/40/41 •WCDMA: Band 1/8 •GSM: 900/1800 MHz
AR617VW-LTE4 AR617VW-LTE4EA	- ME909s-120p: •LTE FDD: bands 1/2/3/4/5/7/8/20 •WCDMA: bands 1/2/5/8 •GSM: 850/900/1800/1900 MHz - EC25AU: •LTE FDD: bands 1/2/3/4/5/7/8/28 •LTE TDD: band 40 •WCDMA: bands 1/2/5/8 •GSM: 850/900/1800/1900 MHz
AR611E-LTE4EA AR617E-LTE4EA AR617EVW-LTE4EA	•LTE FDD: bands 1/2/3/4/5/7/8/18/19/20/26/28/66 •LTE TDD: band 38/40/41 •WCDMA: bands 1/5/8 •GSM: 850/900/1800 MHz - Supported Rates: •LTE FDD: Uplink 40 Mbps, Downlink 120 Mbps •LTE TDD: Uplink 30 Mbps, Downlink 120 Mbps

Support 5G RU	Frequency Band
AR5710I-RU-NRGL	•5G NR SA: Band 1/3/5/7/8/20/28/38/40/41/75/77/78/79/80/81/82/83/84 •5G NR NSA: Band 1/3/5/7/8/20/28/38/40/41/77/78/79 •LTE FDD: Band 1/3/5/7/8/18/19/20/26/28/32 •LTE TDD: Band 34/38/39/40/41/42/43 •DL MIMO: 5G 4x4: NR Band 1/3/7/38/40/41/77/78/79 5G 2x2: NR Band 5/8/20/28/75 - LTE 4x4: Band 1/3/7/38/39/40/41/42/43 - LTE 2x2: Band 5/8/18/19/20/26/28/32/34 •UL MIMO: 5G 2x2: NR Band1/38/40/41/77/78/79 Supported Rates: •5G SA: Theoretical uplink peak of 500 Mbps, theoretical downlink peak of 5.4 Gbps •5G NSA: Theoretical uplink peak of 125 Mbps, theoretical downlink peak of 3.6 Gbps

More Information

For more information about Huawei next-generation AR enterprise routers, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China
Website: e.huawei.com