

# Huawei NetEngine AR6710-H Series Enterprise Router

## Data Sheet

NetEngine AR6710-H series enterprise routers are chassis-shaped routers designed by Huawei for the headquarters and branches of midsize or large enterprises. These routers offer a wide range of service features such as SD-WAN, routing, switching, and security, and come equipped with various interface types such as Ethernet, 5G, E1, POS/CPOS and GPON/xGSPON, which allows them to deliver high performance and diversified services to meet the needs of different enterprises.

## Product Overview

Huawei next-generation NetEngine AR6710-H series enterprise routers deliver superior performance particularly when dealing with diverse and cloud-based services.

Huawei NetEngine AR6710-H series enterprise routers are ideal for the headquarters and branches of midsize or large enterprises and can be deployed at the network egress as needed. This series consists of models such as NetEngine AR6710-H4T4X2Y7, which can meet networking requirements of enterprises of different scales. In addition, they offer a variety of interface cards, such as Ethernet, 5G, E1, and POS/CPOS, to help extend enterprise services.

- **Rich access capability:** Ethernet, 5G (5G cards and 5G RUs), E1, POS/CPOS, and GPON/xGSPON
- **High-quality SD-WAN:** fast ZTP, all-scenario networking architecture, application quality-based intelligent traffic steering, and WAN optimization, helping deliver ultimate service experience
- **Superior performance:** supports GE/10GE optical interface cards; high-speed access of 5G RUs and service cards; built-in WAC capable of unified management of Wi-Fi 5/6/7 devices; seamless roaming between its connected APs
- **AI:** bandwidth planning, network orchestration, policy recommendation, in-band flow measurement, and automatic fault locating
- **Security protection:** integrates NGFW capabilities, offering multi-dimensional security policies, ASPF, application recognition and control, IPS, URL filtering, Antivirus, signature database and antivirus database update, and interconnection with third-party SSE security clouds, supports MACsec\* to ensure end-to-end link security on the LAN side.
- **Reliability:** carrier-class hardware reliability, network-level high reliability, fast service fault recovery, and hot swapping supported
- **Easy O&M and management:** single-site ZTP within 10 minutes, batch site replication, SD-Branch LAN/WAN converged management, 5G RU and switch RU plug-and-play, digital map, visualized application quality and bandwidth, rights- and domain-based management, diversified alarm and log management methods, and report generation

\*: The MACsec function requires the SIC-2X2S-V2 card.



NetEngine AR6710-H4T4X2Y7

- Fixed WAN ports: 2 x 25GE optical, 4 x 10GE optical, 4 x GE electrical (All WAN ports can be switched to LAN ports)
- 6 x SIC card
- Dimensions (H x W x D): 43.6 mm x 442.0 mm x 420.0 mm
- Dual power modules (AC/DC)

## Features and Highlights

### Features and Highlights of NetEngine AR6710-H

| Service Requirement     | Features and Highlights                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| High performance        | <ul style="list-style-type: none"><li>• Integrates the ARM multi-core processor, hardware encryption/decryption engine, hardware TM engine, and hardware FEC codec engine, based on the self-developed SOC chip architecture.</li><li>• Offers industry-leading performance, ensuring a low latency for mission-critical services.</li><li>• Comes equipped with a high-performance multi-core processor that supports high-speed WAN connections and powerful route computing, improving L4-L7 service processing efficiency.</li></ul> |
| High reliability        | <ul style="list-style-type: none"><li>• Provides backup links for enterprise services, enhancing service access reliability.</li><li>• Detects link faults and completes route convergence in milliseconds, greatly shortening the service interruption time.</li></ul>                                                                                                                                                                                                                                                                  |
| Easy O&M                | <ul style="list-style-type: none"><li>• Supports on-premises and cloud-based management by iMaster NCE-Campus using various protocols, such as NETCONF and SNMP, and high-performance data collection through telemetry. These help simplify network deployment, visualize O&amp;M, and reduce OPEX.</li></ul>                                                                                                                                                                                                                           |
| SD-WAN                  | <ul style="list-style-type: none"><li>• Is ideal for the SD-WAN solution to build cost-effective and business-friendly connections over the Internet.</li><li>• Supports application identification and link quality-based intelligent traffic steering, guaranteeing the experience of key applications.</li><li>• Supports multi-link routing and end-to-end IPsec encryption plus reliable devices, ensuring secure service transmission.</li></ul>                                                                                   |
| Architecture innovation | <ul style="list-style-type: none"><li>• On-demand LAN port extension: The network structure is simplified from three layers to two layers. Switch RUs can be managed as logical ports of ARs on iMaster NCE or through the CLI.</li><li>• 5G RU: 5G RUs are managed by the AR as cellular interfaces, and can be monitored and managed on iMaster NCE.</li><li>• Built-in WAC capable of unified management of Wi-Fi 5/6/7 devices; seamless roaming between its connected APs.</li></ul>                                                |

# Product Specifications

## Features and Values of Huawei NetEngine AR6710-H Series

| Specifications                                  | NetEngine AR6710-H4T4X2Y7                                                                        |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------|
| System Parameter                                |                                                                                                  |
| Forwarding performance (NAT+ACL+QoS, IMIX)      | 13 Gbps                                                                                          |
| IPsec performance (IMIX)                        | 10 Gbps                                                                                          |
| IPsec performance (512 bytes)                   | 12 Gbps                                                                                          |
| SD-WAN IPsec performance* (IMIX)                | 11 Gbps                                                                                          |
| SD-WAN IPsec performance* (512 bytes)           | 15 Gbps                                                                                          |
| SD-WAN performance** (IMIX)                     | 9 Gbps                                                                                           |
| SD-WAN performance** (512 bytes)                | 12 Gbps                                                                                          |
| SD-WAN typical performance*** (IMIX)            | 7 Gbps                                                                                           |
| SD-WAN typical performance*** (512 bytes)       | 9 Gbps                                                                                           |
| Fixed WAN ports                                 | 2 x 25GE SFP28, 4 x 10GE SFP+, 4 x GE electrical<br>(All WAN ports can be switched to LAN ports) |
| 5G RU                                           | Supported                                                                                        |
| Switch RU                                       | Supported                                                                                        |
| WAC(Number of managed APs, default/maximum****) | 32/512                                                                                           |
| SIC slot                                        | 6 x SIC                                                                                          |
| WSIC slot (default/maximum*****)                | 1/4                                                                                              |
| Console port                                    | 1 x RJ45 console port                                                                            |
| USB port                                        | 1 x USB2.0                                                                                       |
| Memory                                          | 8 GB                                                                                             |

\*: Scenario where the SD-WAN IPsec performance specification applies: IPsec. This specification applies to the combined total of traffic in inbound and outbound directions.

\*\*: Scenario where the SD-WAN performance specification applies: IPsec + QoS. This specification applies to the combined total of traffic in inbound and outbound directions.

\*\*\*: Scenario where the typical SD-WAN performance specification applies: IPsec + QoS + SA + AppFlow. This specification applies to the combined total of traffic in inbound and outbound directions.

\*\*\*\*: By default, a maximum of 16 APs can be managed for free. If the number of APs exceeds 32, licenses must be purchased. NetEngine AR6710-H series supports a maximum of 512 APs.

\*\*\*\*\*: The maximum number of slots includes the number of combined slots.

| Specifications                                                                                                                     | NetEngine AR6710-H4T4X2Y7                                 |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Dimensions and Weight                                                                                                              |                                                           |
| Dimensions without packaging (excluding the parts protruding from the body) (H x W x D)                                            | 43.6 mm x 442.0 mm x 420.0 mm                             |
| Dimensions without packaging (the depth is the distance from ports on the front panel to the handle on the rear panel) (H x W x D) | 43.6 mm x 442.0 mm x 467.8 mm                             |
| Dimensions with packaging (H x W x D)                                                                                              | 190 mm x 590 mm x 780 mm                                  |
| Installation type                                                                                                                  | Rack                                                      |
| Occupied rack space                                                                                                                | 1 U                                                       |
| Power Specifications, Power Consumption, and Heat Dissipation                                                                      |                                                           |
| Rated input voltage (V)                                                                                                            | AC: 100 V to 240 V, 50 Hz/60 Hz<br>DC: -48 V to -60 V     |
| Input voltage range (V)                                                                                                            | AC: 90 V to 264 V, 47 Hz to 63 Hz<br>DC: -38.4 V to -72 V |
| Maximum input current (A)                                                                                                          | AC: 5 A                                                   |
| Maximum output power (W)                                                                                                           | AC: 300 W<br>DC: 260 W                                    |
| Typical power consumption (W)                                                                                                      | Single SRU: 83 W<br>Dual SRU: 145 W                       |
| Maximum power consumption (W)                                                                                                      | Single SRU: 92 W<br>Dual SRU: 160 W                       |
| Power supply redundancy                                                                                                            | Dual power supplies, hot-swappable                        |
| Fan modules                                                                                                                        | Dual fan modules, hot-swappable                           |
| Airflow                                                                                                                            | Left-to-right                                             |
| Noise                                                                                                                              | 54.3 dB(A)                                                |
| Environment Parameters                                                                                                             |                                                           |
| Operating temperature                                                                                                              | 0°C to 45°C                                               |
| Operating humidity                                                                                                                 | 5% to 95% (non-condensing)                                |
| Operating altitude                                                                                                                 | < 5000 m                                                  |

| Specifications      | NetEngine AR6710-H4T4X2Y7 |
|---------------------|---------------------------|
| Storage temperature | -40°C to +70°C            |

#### Software Features and Protocols

| Item                 | NetEngine AR6710-H Series                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic function       | DHCPv4 Server/Client/Relay, DHCPv6 Server/Client/Relay, PPPoE client, NAT, and sub-interface management, DNS                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| LAN                  | IEEE 802.1p, IEEE 802.1Q, VLAN management, VLAN aggregation, Voice VLAN, MAC management, STP/RSTP, MSTP                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| IPv4 unicast routing | Routing policies, static routes, RIP, OSPF, IS-IS, BGP, IP FRR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| IPv6 unicast routing | Static routing, routing policies, RIPng, OSPFv3, IS-ISv6, BGP4+                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Basic IPv6 function  | IPv6 ND, Path PMTU, IPv6 FIB, IPv6 ACL, ICMPv6, DNSv6, DHCPv6, PPPoE client IPv6, IPv4 over IPv6, IPv6 over IPv4                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| VPN                  | GRE, Ethernet over GRE, IPsec v4/v6, Segment Routing IPv6 (SRv6), L2TP client, DSVPN, IPv4/IPv6 dual-stack, SD-WAN EVPN                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| WAN optimization     | A-FEC, Multi-path packet duplication, ITP and data compression                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Multicast            | IGMP V1/V2/V3, PIM SM, PIM DM, MSDP, MBGP, IP multicast over SD-WAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| MPLS                 | MPLS LDP, MPLS L3VPN, Dynamic LSP, IP FRR, LDP FRR, MPLS 6VPE, MPLS 6PE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| QoS                  | Priority mapping, traffic policing (CAR), traffic shaping, congestion avoidance, congestion management, MQC (traffic classifier, traffic behavior, and traffic policy), level-3 traffic scheduling and shaping (HQoS), application identification, intelligent policy-based routing (SPR), SaaS routing, Adaptive QoS, SaaS routing, Intelligent Traffic Policing(ITP)                                                                                                                                                                                                          |
| Security             | ACL/ACL6, firewall, AAA authentication, RADIUS, HWTACACS, NAC, PKI, broadcast storm suppression, ARP security, ICMP security, attack defense, URPF, CPCAR, attack source tracing, 802.1X authentication, portal authentication, port security, integrates NGFW capabilities, offering security policy control based on IP address (groups)/domain groups/applications/time ranges, ASPF, application recognition and control, IPS, URL filtering, Antivirus, signature database and antivirus database update, and interconnection with third-party SSE security clouds,MACsec* |
| System management    | Upgrade management, device management, SNMP (v1/v2c/v3), RMON, NTP, USB-, DHCP option-, and email-based deployment, deployment through the registration query center, NETCONF/YANG/telemetry, TCP FPM, NQA, IFIT,NetStream/NetStream v6, switch RU plug-and-play, web-based management, LLDP for an RU, Event Versus Action(EVA)                                                                                                                                                                                                                                                |
| WAC                  | <ul style="list-style-type: none"> <li>•Management of Wi-Fi 5/6/7 Fit APs</li> <li>•CAPWAP protocol</li> <li>•WLAN user management</li> <li>•WLAN radio management</li> <li>•WLAN QoS</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                |

| Item | NetEngine AR6710-H Series                                                                                                                                                                                     |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | <ul style="list-style-type: none"> <li>•WLAN security</li> <li>•WLAN user roaming</li> </ul> <p>Supports 802.11k and 802.11v smart roaming, 802.11r fast roaming (<math>\leq 50</math> ms) and AI roaming</p> |


\*: The MACsec function requires the SIC-2X2S-V2 card.

## Safety and Regulatory Standards

| Item                               | NetEngine AR6710-H Series                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC standards compliance           | <ul style="list-style-type: none"> <li>•EN 55032</li> <li>•EN 55035</li> <li>•CISPR 32</li> <li>•CISPR 35</li> <li>•IEC/EN 61000-3-2</li> <li>•EN 61000-3-3</li> <li>•ETSI EN 300 386</li> <li>•ETSI EN 301 489-1</li> <li>•ETSI EN 301 489-3</li> <li>•ETSI EN 301 489-17</li> <li>•ETSI EN 301 489-52</li> <li>•FCC CFR Part 15, Subpart B</li> <li>•ANSI C63.4</li> <li>•ICES-003 Issue 7</li> <li>•EN 50121-1</li> <li>•EN 50121-4</li> <li>•GB 9254</li> </ul> |
| Environmental standards compliance | <ul style="list-style-type: none"> <li>•RoHS</li> <li>•REACH</li> <li>•WEEE</li> </ul>                                                                                                                                                                                                                                                                                                                                                                              |
| Security standards compliance      | <ul style="list-style-type: none"> <li>•IEC 60950-1</li> <li>•IEC 62368-1</li> <li>•EN 60950-1</li> <li>•UL 60950-1</li> <li>•CSA C22.2 No 60950-1</li> <li>•GB 4943.1</li> </ul>                                                                                                                                                                                                                                                                                   |


# Application Scenarios

## Networking diagram for branch 5G/LTE wireless access

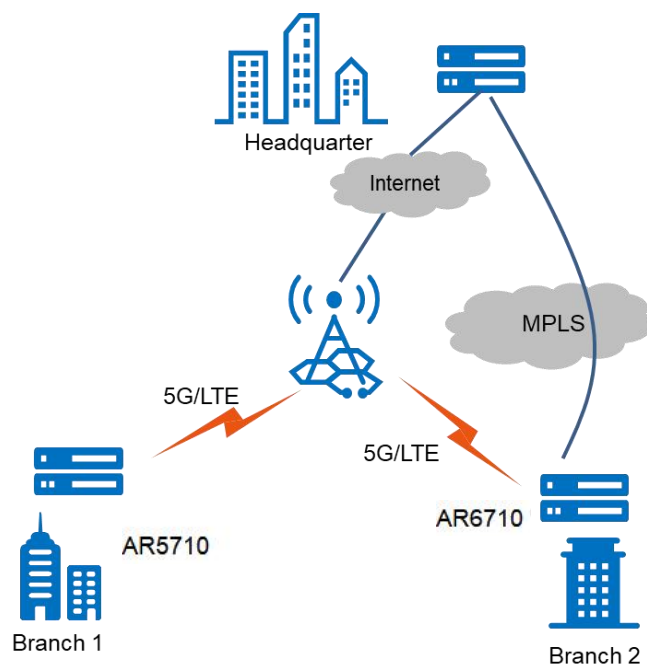


Huawei NetEngine AR6710-H series routers feature 5G/LTE functionality, enabling wireless interconnection between enterprise branches and between the headquarters and branches. A 5G/LTE link can function as the active link or as a backup for wired links, enhancing network stability while reducing network construction cost.

## SD-WAN networking

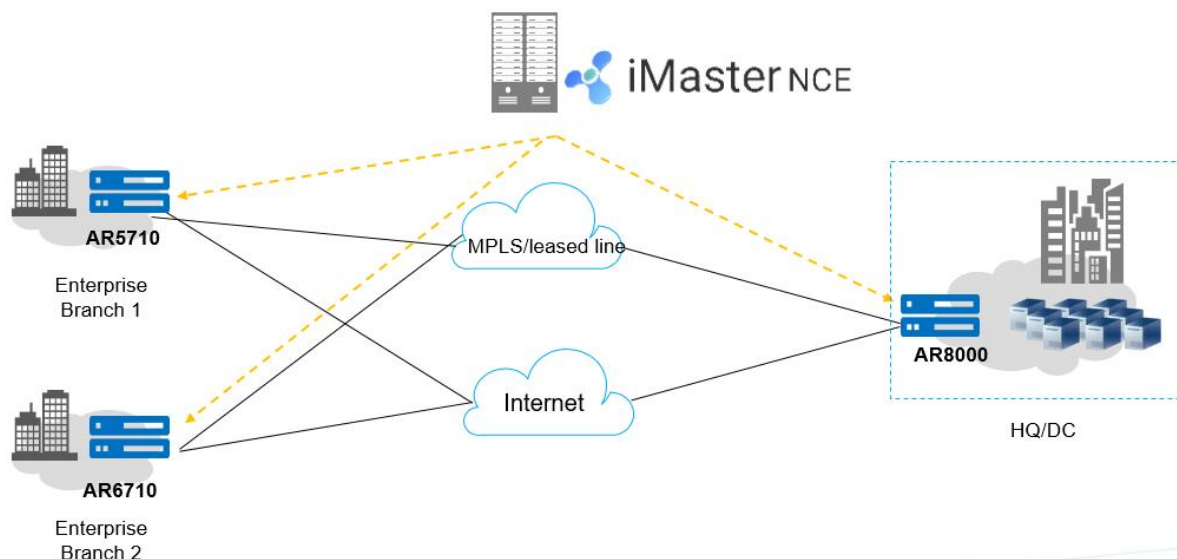

In the SD-WAN Solution, Huawei NetEngine AR6710-H series routers can serve as gateways for the headquarters and branches of midsize or large enterprises and support multiple physical links such as MPLS private lines and Internet links. Additionally, they can be managed and visualized on iMaster NCE in a unified manner. The AR6710-H series provides extensive SD-WAN features such as intelligent application identification and intelligent traffic steering to deliver better service experience to enterprises. For details about Huawei SD-WAN Solution, visit

Networking diagram in the VPN scenario

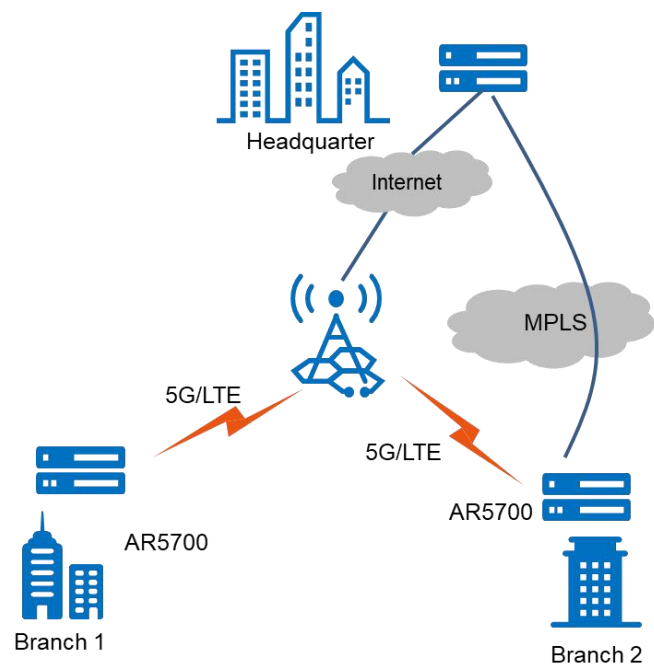

Build different types of VPNs through the Internet

Huawei NetEngine AR6710-H series routers offer a range of secure access features that enable communication between enterprise branches and headquarters, as well as allowing partners to access enterprise resources. Secure tunnels such as GRE VPN, IPsec VPN, DSVPN, and L2TP VPN tunnels can be set up between the headquarters and branches for secure data access and transmission. The AR6710-H series supports quick tunnel deployment and authentication for branches. Furthermore, authenticated and authorized partners can remotely access the enterprise resources over these tunnels.

## Ordering Information

The configuration of the NetEngine AR6710-H series includes device model selection, main control board selection, and software configuration.

- Device model

Select the device model according to the uplink interface type and service requirements.

- Main control board

Select a single or dual main control boards based on the actual service scenario.

- Software

The NetEngine AR6710-H series software consists of the basic software and licensed software. The basic software provides basic features such as routing, switching, and security, while the licensed software provides additional functions, such as security protection.

| Host            | Ordering Information                                                        |
|-----------------|-----------------------------------------------------------------------------|
| AR6710-H4T4X2Y7 | AR6710-H4T4X2Y7, 2*25GE(SFP28), 4*10GE(SFP+), 4*GE Copper, 1*USB 3.0, 6*SIC |

|          |                                                                                                    |
|----------|----------------------------------------------------------------------------------------------------|
| SRU-700S | AR6710-H4T4X2Y7 Service and Router Unit (SRU-700S), 2*25GE SFP28, 4*10GE SFP+, 4*GE RJ45, 1*USB3.0 |
|----------|----------------------------------------------------------------------------------------------------|

| Software Sales Model      | License                                                            | Ordering Information                                                                                                                                                                                                                                                                        |
|---------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Threat protection service | LAR0TP1301<br>LAR0TP1302<br>LAR0TP1303<br>LAR0TP1304<br>LAR0TP1305 | Threat Protection Service Subscribe x Year (Applies to AR6700) (corresponding model: LAR0TP130x), including: <ul style="list-style-type: none"> <li>• IPS signature database update</li> <li>• URL remote query for URL filtering</li> <li>• Antivirus signature database update</li> </ul> |
| Independent Sale Model    | AR67-H-LIC-Basic-IFIT                                              | AR6700-H Value-added Basic IFIT Package                                                                                                                                                                                                                                                     |
|                           | AR67-H-LIC-Enhance-IFIT                                            | AR6700-H Value-added Enhanced IFIT Package                                                                                                                                                                                                                                                  |
|                           | AR67-H-LIC-Enh-WANOP                                               | AR6700-H Value-added Enhanced WAN-Optimize Package, including: <ul style="list-style-type: none"> <li>• Data Compression</li> <li>• Adaptive QoS</li> </ul>                                                                                                                                 |
|                           | AR67-H-LIC-NETCONN                                                 | AR6700-H Value-added Network Connection Package, including: <ul style="list-style-type: none"> <li>• DSVPN</li> </ul>                                                                                                                                                                       |
| N1 Model (NCE-Campus)     | N1-AR67-H-B                                                        | N1 AR6700-H CloudCampus Basic Software (exclude SD-WAN), Per Device                                                                                                                                                                                                                         |
|                           | N1-AR67-H-F                                                        | N1 AR6700-H CloudCampus Foundation (include SD-WAN), Per Device                                                                                                                                                                                                                             |
|                           | N1-AR67-H-A                                                        | N1 AR6700-H CloudCampus Advanced (include SD-WAN), Per Device                                                                                                                                                                                                                               |

## Other Information

| SIC Port Model | Ordering Information                                     |
|----------------|----------------------------------------------------------|
| SIC-4E1-V2     | 4-port channelized E1 interface card                     |
| SIC-4GET-V2    | 4-port GE LAN/WAN interface card                         |
| SIC-4STM1-V2   | 4-port 155M Packet over SDH/Sonet optical interface card |
| SIC-NRGL-V2    | 5G NR/LTE Interface Card                                 |
| SIC-1V35B-V2*  | 4-Port VDSL2 WAN Interface Card                          |
| SIC-2X2S-V2    | 2-Port 10GE SFP+, 2-Port GE SFP Interface Card           |
| SIC-4CSTM1-V2  | 4-port channelized POS interface card                    |

\* : Only PTM mode is supported.

| WSIC Port Model | Ordering Information                   |
|-----------------|----------------------------------------|
| WSIC-4GE-C-V2   | 4-port GE combo LAN/WAN interface card |

| Support 5G RU             | Frequency Band                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NetEngine AR5710I-RU-NRGL | <ul style="list-style-type: none"> <li>•5G NR SA: Band 1/3/5/7/8/20/28/38/40/41/75/77/78/79/80/81/82/83/84</li> <li>•5G NR NSA: Band 1/3/5/7/8/20/28/38/40/41/77/78/79</li> <li>•LTE FDD: Band 1/3/5/7/8/18/19/20/26/28/32</li> <li>•LTE TDD: Band 34/38/39/40/41/42/43</li> <li>•DL MIMO: <ul style="list-style-type: none"> <li>5G 4x4: NR Band 1/3/7/38/40/41/77/78/79</li> <li>5G 2x2: NR Band 5/8/20/28/75</li> <li>LTE 4x4: Band 1/3/7/38/39/40/41/42/43</li> <li>LTE 2x2: Band 5/8/18/19/20/26/28/32/34</li> </ul> </li> <li>•UL MIMO: <ul style="list-style-type: none"> <li>5G 2x2: NR Band 1/38/40/41/77/78/79</li> </ul> </li> </ul> <p>Supported Rates:</p> <ul style="list-style-type: none"> <li>•5G SA: Theoretical uplink peak of 500 Mbps, theoretical downlink peak of 5.4 Gbps</li> <li>•5G NSA: Theoretical uplink peak of 125 Mbps, theoretical downlink peak of 3.6 Gbps</li> </ul> |

| Support Switch RU | Models                                                                                                           |
|-------------------|------------------------------------------------------------------------------------------------------------------|
| Switch RU         | CloudEngine S5731-L series, CloudEngine S5731S-L series, CloudEngine S5731I-L series, CloudEngine S5751-L series |

## More Information

For more information, visit <https://e.huawei.com/en/> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: [support\\_e@huawei.com](mailto:support_e@huawei.com)

**Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

### Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

### Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

### Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base  
Bantian, Longgang Shenzhen 518129  
People's Republic of China  
Website: [www.huawei.com](http://www.huawei.com)

---

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.