Huawei NetEngine AR5710-H Series Enterprise Router Data Sheet



NetEngine AR5710-H series enterprise routers are fixed routers designed by Huawei for the headquarters and branches of small and medium-sized enterprise. These routers offer a wide range of service features such as SD-WAN, routing, switching, and security, and come equipped with various interface types such as Ethernet, LTE/5G, and GPON/xGSPON, which allows them to deliver high performance and diversified services to meet the needs of different enterprises.

Product Overview

Huawei's next-generation NetEngine AR5710-H series enterprise routers deliver superior performance particularly when dealing with diverse and cloud-based services.

Huawei NetEngine AR5710-H series enterprise routers are ideal for the headquarters and branches of small and medium-sized enterprise and can be deployed at the network egress as needed. This series consists of NetEngine AR5710-H8T2TS1, NetEngine AR5710-H8T2TS1-T, NetEngine AR5710-H4T4N2X, NetEngine AR5710-H4T4N2X-LTE4EA, NetEngine AR5710-H2T4N2X-NRGL, and NetEngine AR5710-H2T4PN2X-NRGL, NetEngine AR5710-H2T4N2XW, NetEngine AR5710-H2T4N2XW-NRGL, and NetEngine AR5710-H2T4N2XW-Q, which can meet networking requirements of enterprises of different scales. In addition, they offer a variety of interface cards, such as LTE/5G, to help extend enterprise services.

- **Rich access capability:** Ethernet, LTE/5G (MIC LTE, built-in LTE, built-in 5G and 5G RUs), GPON/xGSPON, and 90 W PoE++
- **High-quality SD-WAN:** fast ZTP, all-scenario networking architecture, application quality-based intelligent traffic steering, and WAN optimization, helping deliver ultimate service experience
- **Superior performance:** high-speed access of 5G RUs and built-in 5G All-in-one gateway; built-in WAC capable of unified management of Wi-Fi 5/6/7 devices; seamless roaming between its connected APs
- **AI:** bandwidth planning, network orchestration, policy recommendation, in-band flow measurement, and automatic fault locating
- **Security protection:** integrates NGFW capabilities, offering multi-dimensional security policies, ASPF, application recognition and control, IPS, URL filtering, Antivirus and SSL-encrypted traffic detection, signature database and antivirus database update, and interconnection with third-party SSE security clouds. PQC is supported for SSL, SSH, and SD-WAN DTLS protocols.
- **Reliability:** carrier-class hardware reliability, network-level high reliability, and fast service fault recovery
- **Easy O&M and management:** single-site ZTP within 10 minutes, batch site replication, SD-Branch LAN/WAN converged management, 5G RU and switch RU plug-and-play, digital map, visualized application quality and bandwidth, rights- and domain-based management, diversified alarm and log management methods, and report generation

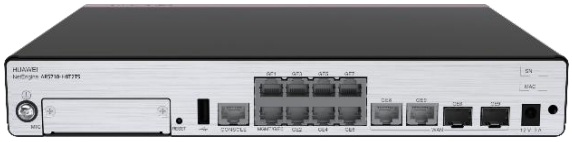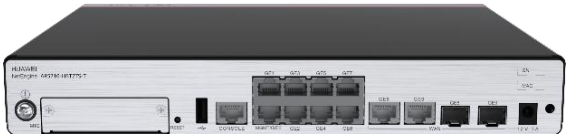 NetEngine AR5710-H8T2TS1	• Fixed WAN ports*: 2 x GE Combo • Fixed LAN ports*: 8 x GE electrical • Memory: 4 GB • 1 x MIC LTE with 2 x SIM card (active/standby) • Dimensions (H x W x D)**: 44.0 mm x 300.0 mm x 220.3 mm
 NetEngine AR5710-H8T2TS1-T	• Fixed WAN ports*: 2 x GE Combo • Fixed LAN ports*: 8 x GE electrical • Memory: 4 GB

	• 1 x MIC LTE with 2 x SIM card (active/standby) • Dimensions (H x W x D)**: 44.0 mm x 300.0 mm x 220.3 mm
 NetEngine AR5710-H4T4N2X***	• Fixed WAN ports*: 2 x 10GE SFP+ • Fixed LAN ports*: 4 x 2.5GE electrical, 4 x GE electrical • Memory: 4 GB • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H4T4N2X-LTE4EA***	• Fixed WAN ports*: 2 x 10GE SFP+, 1 x LTE4EA • Fixed LAN ports*: 4 x 2.5GE electrical, 4 x GE electrical • Memory: 4 GB • 2 x SIM cards (active/standby) • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H2T4N2X-NRGL***	• Fixed WAN ports*: 2 x 10GE SFP+, 5G SA/NSA • Fixed LAN ports*: 4 x 2.5GE electrical, 2 x GE electrical • Memory: 4 GB • 2 x SIM cards (active/standby) • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H2T4PN2X-NRGL***	• Fixed WAN ports*: 2 x 10GE SFP+, 5G SA/NSA • Fixed LAN ports*: 4 x 2.5GE electrical (4 x PoE++), 2 x GE electrical • Memory: 4 GB • 2 x SIM cards (active/standby) • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H2T4N2XW**	• Fixed WAN ports*: 2 x 10GE Combo • Fixed LAN ports*: 4 x 2.5GE electrical, 2 x GE electrical • Wi-Fi 7: 802.11 a/b/g/n/ac/ax/be (2.4G+5G) • Memory: 4 GB • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H2T4N2XW-NRGL**	• Fixed WAN ports*: 2 x 10GE Combo, 5G SA/NSA • Fixed LAN ports*: 4 x 2.5GE electrical, 2 x GE electrical • Memory: 4 GB • Wi-Fi 7: 802.11 a/b/g/n/ac/ax/be (2.4G+5G) • 2 x SIM cards (active/standby) • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm
 NetEngine AR5710-H2T4N2XW-Q**	• Fixed WAN ports*: 2 x 10GE Combo • Fixed LAN ports*: 4 x 2.5GE electrical, 2 x GE electrical • Wi-Fi 7: 802.11 a/b/g/n/ac/ax/be (2.4G+5G) • Memory: 4 GB • Dimensions (H x W x D)**: 43.6 mm x 320 mm x 210 mm

*: Supported by all models: All fixed ports are LAN/WAN interchangeable.

**: Dimensions without packaging (H x W x D), Basic dimensions (excluding the parts protruding from the body).

***:In the SD-WAN scenario, a MultiGE interface on the device of this model goes online at the rate of 2.5 Gbps. The interface cannot be deployed in ZTP mode at the rate of 10 Gbps, and cannot be switched to a 10GE interface online.

Features and Highlights

Features and Highlights of NetEngine AR5710-H

Service Requirement	Feature and Highlight
High performance	• Integrates the ARM multi-core processor and hardware encryption/decryption engine based on the self-developed SOC chip architecture. • Offers industry-leading performance, ensuring a low latency for mission-critical services. • Comes equipped with a high-performance multi-core processor that supports high-speed WAN connections and powerful route computing, improving L4–L7 service processing efficiency.
High reliability	• Provides backup links for enterprise services, enhancing service access reliability. • Detects link faults and completes route convergence in milliseconds, greatly shortening the service interruption time.
Easy O&M	• Supports on-premises and cloud-based management by iMaster NCE-Campus using various protocols, such as NETCONF and SNMP, and high-performance data collection through telemetry. These helps simplify network deployment, visualize O&M, and reduce OPEX.
SD-WAN	• Is ideal for the SD-WAN solution to build cost-effective and business-friendly connections over the Internet. • Supports application identification and link quality-based intelligent traffic steering, guaranteeing the experience of key applications. • Supports multi-link routing; end-to-end IPsec encryption plus reliable devices, ensuring secure service transmission.
Architecture innovation	• PoE extension: The PoE output is not limited when the local power supply is used, but the maximum power is limited when the AR5710-H supplies power through PoE. • On-demand LAN port extension: The network structure is simplified from three layers to two layers. Switch RUs can be managed as logical ports of ARs on iMaster NCE or through the CLI. • 5G RU: 5G RUs are managed by ARs as cellular interfaces, and can be monitored and managed on iMaster NCE. • Built-in WAC capable of unified management of Wi-Fi 5/6/7 devices; seamless roaming between its connected APs.

Product Specifications

Features and Values of Huawei NetEngine AR5710-H Series

Specifications	AR5710-H8T2TS1	AR5710-H8T2TS1-T	AR5710-H4T4N2X	AR5710-H4T4N2X-LTE4EA
Forwarding performance* (NAT+ACL+QoS, IMIX)	4 Gbps	4 Gbps	4 Gbps	4 Gbps
IPv4 Forwarding performance (512 bytes)	10 Gbps	10 Gbps	13 Gbps	13 Gbps
IPSec performance (IMIX)	1.6 Gbps	1.6 Gbps	1.6 Gbps	1.6 Gbps
IPSec performance (512 bytes)	2 Gbps	2 Gbps	2 Gbps	2 Gbps
IPSec performance (1420 bytes)	5 Gbps	5 Gbps	5 Gbps	5 Gbps
SD-WAN IPsec performance** (IMIX)	2 Gbps	2 Gbps	2 Gbps	2 Gbps
SD-WAN IPsec performance** (512 bytes)	2.6 Gbps	2.6 Gbps	2.6 Gbps	2.6 Gbps
SD-WAN IPsec performance** (1400 bytes)	5.2 Gbps	5.2 Gbps	5.2 Gbps	5.2 Gbps
SD-WAN performance*** (IMIX)	1.5 Gbps	1.5 Gbps	1.5 Gbps	1.5 Gbps
SD-WAN performance*** (512 bytes)	2.2 Gbps	2.2 Gbps	2.2 Gbps	2.2 Gbps
SD-WAN performance*** (1400 bytes)	3.8 Gbps	3.8 Gbps	3.8 Gbps	3.8 Gbps
SD-WAN typical performance**** (IMIX)	900 Mbps	900 Mbps	900 Mbps	900 Mbps
SD-WAN typical performance**** (512 bytes)	1.2 Gbps	1.2 Gbps	1.2 Gbps	1.2 Gbps
SD-WAN typical performance**** (1400 bytes)	3 Gbps	3 Gbps	3 Gbps	3 Gbps
Fixed WAN ports*****	2 x GE Combo	2 x GE Combo	2 x 10GE SFP+	2 x 10GE SFP+
Built-in LTE/5G	-	-	-	LTE4EA, 2 x SIM cards (active/standby)
5G RU	Supported	Supported	Supported	Supported
Fixed LAN ports*****	8 x GE electrical	8 x GE electrical	4 x 2.5GE electrical, 4 x	4 x 2.5GE electrical, 4 x GE

Specifications	AR5710-H8T2TS1	AR5710-H8T2TS1-T	AR5710-H4T4N2X	AR5710-H4T4N2X-LTE4EA
			GE electrical	electrical
Switch RU	Supported	Supported	Supported	Supported
PoE	-	-	-	-
WAC(Number of managed APs, default/maximum******)	32/64	32/64	32/64	32/64
MIC slot	1 x MIC	1 x MIC	-	-
Console port	1 x RJ45 Console	1 x RJ45 Console	1 x RJ45 Console	1 x RJ45 Console
USB port	1 x USB2.0	1 x USB2.0	1 x USB2.0	1 x USB2.0
Memory	4 GB	4 GB	4 GB	4 GB
Flash	2 GB	2 GB	2 GB	2 GB
TPM	-	Supported	-	-
Dimensions and Weight				
Dimensions without packaging (H x W x D)	44.0 mm x 300.0 mm x 220.3 mm	44.0 mm x 300.0 mm x 220.3 mm	43.6 mm x 320 mm x 210 mm	43.6 mm x 320 mm x 210 mm
Dimensions with packaging (H x W x D)	110.0 mm x 435.0 mm x 360 mm	110.0 mm x 435.0 mm x 360 mm	90 mm x 465 mm x 360 mm	90 mm x 465 mm x 360 mm
Weight without packaging	1.8 kg	1.8 kg	1.937 kg	2.145 kg
Installation type	Rack, Work bench, Against the wall	Rack, Work bench, Against the wall	Rack, Work bench, Against the wall	Rack, Work bench, Against the wall
Occupied rack space	1 U	1 U	1 U	1 U
Power Specifications, Power Consumption, and Heat Dissipation				
Rated input voltage (V)	100 V to 240 V, 50 Hz/60 Hz	100 V to 240 V, 50 Hz/60 Hz	100 V to 240 V, 50 Hz/60 Hz	100 V to 240 V, 50 Hz/60 Hz
Input voltage range (V)	90 V to 264 V, 47 Hz/63 Hz	90 V to 264 V, 47 Hz/63 Hz	90 V to 264 V, 47 Hz/63 Hz	90 V to 264 V, 47 Hz/63 Hz
Maximum input current (A)	1 A	1 A	0.8 A	2 A
Maximum output power (W@DC)	36 W	36 W	32 W	70 W
Typical power consumption (W)	25 W	25 W	32 W	36 W
Maximum power consumption (W)	29 W	29 W	38 W	43 W
Fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules
Airflow	Left to right	Left to right	Left to right	Left to right
Environment Parameters				
Noise	41.9 dB(A)	41.9 dB(A)	50 dB(A)	50 dB(A)

Specifications	AR5710-H8T2TS1	AR5710-H8T2TS1-T	AR5710-H4T4N2X	AR5710-H4T4N2X-LTE4EA
Operating temperature	0°C to 45°C	0°C to 45°C	0°C to 45°C	0°C to 45°C
Operating humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Operating altitude	< 5000 m	< 5000 m	< 5000 m	< 5000 m
Storage temperature	–40°C to + 70°C	–40°C to + 70°C	–40°C to + 70°C	–40°C to + 70°C

*: Manual switching to the hardware forwarding mode is required.
**: Scenario where the SD-WAN IPsec performance specification applies: IPsec, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions. The IMIX forwarding performance in Info-Finder is removed from R25C10 and is now displayed as the forwarding performance of packets with a size of 512 bytes. If you need the forwarding performance information of packets with a size of 512 bytes, you can switch to a version earlier than R25C00.
***: Scenario where the SD-WAN performance specification applies: IPsec + QoS, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions. The IMIX forwarding performance in Info-Finder is removed from R25C10 and is now displayed as the forwarding performance of packets with a size of 512 bytes. If you need the forwarding performance information of packets with a size of 512 bytes, you can switch to a version earlier than R25C00.
****: Scenario where the typical SD-WAN performance specification applies: IPsec + QoS + SA + AppFlow, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions.
*****: All fixed ports are LAN/WAN interchangeable.
******: By default, a maximum of 32 APs can be managed for free. If the number of APs exceeds 32, licenses must be purchased. NetEngine AR5710-H series supports a maximum of 64 APs.

Features and Values of Huawei NetEngine AR5710-H2 Series

Specifications	AR5710-H2T4N2X-NRGL	AR5710-H2T4PN2X-NRGL	AR5710-H2T4N2XW	AR5710-H2T4N2XW-NRGL	AR5710-H2T4N2XW-Q
Forwarding performance* (NAT+ACL+QoS, IMIX)	4 Gbps	4 Gbps	4 Gbps	4 Gbps	4 Gbps
IPv4 Forwarding performance (512 bytes)	13 Gbps	13 Gbps	13 Gbps	13 Gbps	13 Gbps
IPSec performance (IMIX)	1.6 Gbps	1.6 Gbps	1.6 Gbps	1.6 Gbps	1.6 Gbps
IPSec performance (512 bytes)	2 Gbps	2 Gbps	2 Gbps	2 Gbps	2 Gbps
IPSec performance (1420 bytes)	5 Gbps	5 Gbps	5 Gbps	5 Gbps	5 Gbps
SD-WAN IPsec performance** (IMIX)	2 Gbps	2 Gbps	2 Gbps	2 Gbps	2 Gbps
SD-WAN IPsec performance** (512 bytes)	2.6 Gbps	2.6 Gbps	2.6 Gbps	2.6 Gbps	2.6 Gbps
SD-WAN IPsec performance** (1400 bytes)	5.2 Gbps	5.2 Gbps	5.2 Gbps	5.2 Gbps	5.2 Gbps
SD-WAN performance*** (IMIX)	1.5 Gbps	1.5 Gbps	1.5 Gbps	1.5 Gbps	1.5 Gbps
SD-WAN	2.2 Gbps	2.2 Gbps	2.2 Gbps	2.2 Gbps	2.2Gbps

Specifications	AR5710-H2T4N2X-NRGL	AR5710-H2T4PN2X-NRGL	AR5710-H2T4N2XW	AR5710-H2T4N2XW-NRGL	AR5710-H2T4N2XW-Q
performance*** (512 bytes)					
SD-WAN performance*** (1400 bytes)	3.8 Gbps	3.8 Gbps	3.8 Gbps	3.8 Gbps	3.8 Gbps
SD-WAN typical performance**** (IMIX)	900 Mbps	900 Mbps	900 Mbps	900 Mbps	900 Mbps
SD-WAN typical performance**** (512 bytes)	1.2 Gbps	1.2 Gbps	1.2 Gbps	1.2 Gbps	1.2 Gbps
SD-WAN typical performance**** (1400 bytes)	3 Gbps	3 Gbps	3 Gbps	3 Gbps	3 Gbps
Fixed WAN ports*****	2 x 10GE SFP+	2 x 10GE SFP+	2 x 10GE Combo	2 x 10GE Combo	2 x 10GE Combo
Built-in LTE/5G	5G SA/NSA, 2 x SIM cards (active/standby)	5G SA/NSA, 2 x SIM cards (active/standby)	-	5G SA/NSA, 2 x SIM cards (active/standby)	-
5G RU	Supported	Supported	Supported	Supported	Supported
Fixed LAN ports*****	4 x 2.5GE electrical, 2 x GE electrical	4 x 2.5GE electrical (4 x PoE++), 2 x GE electrical	4 x 2.5GE electrical, 2 x GE electrical	4 x 2.5GE electrical, 2 x GE electrical	4 x 2.5GE electrical , 2 x GE electrical
Switch RU	Supported	Supported	Supported	Supported	Supported
PoE	-	Maximum total power: 130 W; up to 4 ports powered PoE, PoE+, and PoE++ auto-negotiation: •PoE: 15.4 W per port (up to 4 ports) •PoE+: 30 W per port (up to 4 ports) •PoE++: 60 W per port (up to 2 ports) or 90 W (up to 1 port)	-	-	-
Wi-Fi 7	-	-	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac/ax/be	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac/ax/be	Dual-band (2.4 GHz and 5 GHz), 802.11a/b/g/n/ac/ax/be
Maximum number of Wi-Fi users******	-	-	256	256	256
Peak Wi-Fi rate	-	-	3.57 Gbps (690 Mbps @ 2.4 GHz,	3.57 Gbps (690 Mbps @ 2.4 GHz, 2.88	3.57 Gbps (690 Mbps @ 2.4 GHz,

Specifications	AR5710-H2T4N2X-NRGL	AR5710-H2T4PN2X-NRGL	AR5710-H2T4N2XW	AR5710-H2T4N2XW-NRGL	AR5710-H2T4N2XW-Q
			2.88 Gbps @ 5 GHz)	Gbps @ 5 GHz)	2.88 Gbps @ 5 GHz)
WAC(Number of managed APs, default/maximum *******)	32/64	32/64	32/64	32/64	32/64
MIC slot	-	-	-	-	-
Console port	1 x RJ45 Console	1 x RJ45 Console	1 x RJ45 Console	1 x RJ45 Console	1 x RJ45 Console
USB port	1 x USB2.0	1 x USB2.0	1 x USB2.0	1 x USB2.0	1 x USB2.0
Memory	4 GB	4 GB	4 GB	4 GB	4 GB
Flash	2 GB	2 GB	2 GB	2 GB	2 GB
Dimensions and Weight					
Dimensions without packaging (H x W x D)	43.6 mm x 320 mm x 210 mm	43.6 mm x 320 mm x 210 mm	43.6 mm x 320 mm x 210 mm	43.6 mm x 320 mm x 210 mm	43.6 mm x 320 mm x 210 mm
Dimensions with packaging (H x W x D)	90 mm x 465 mm x 360 mm	90 mm x 465 mm x 360 mm	90 mm x 465 mm x 360 mm	90 mm x 465 mm x 360 mm	90 mm x 465 mm x 360 mm
Weight without packaging	2.327 kg	2.602 kg	2.2 kg	2.264 kg	2.869 kg
Installation type	Rack, Work bench, Against the wall				
Occupied rack space	1 U	1 U	1 U	1 U	1 U
Power Specifications, Power Consumption, and Heat Dissipation					
Rated input voltage (V)	100 V to 240 V, 50 Hz/60 Hz				
Input voltage range (V)	90 V to 264 V, 47 Hz/63 Hz				
Maximum input current (A)	2 A	3 A	2A	2A	1A
Maximum output power (W@DC)	70 W	70 W	70 W	70 W	70 W
Typical power consumption (W)	35 W	36 W	32.59 W	34.93 W	32.56 W
Maximum power consumption (W)	42 W	190 W	47.8 W	53 W	46.2 W
Fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules	Built-in unpluggable fan modules	Natural heat dissipation, fanless design
Airflow	Left to right	Left to right	Left to right	Left to right	-
Environment Parameters					
Noise	50 dB(A)	50 dB(A)	50 dB(A)	50 dB(A)	0 dB(A)
Operating temperature	0°C to 45°C				

Specifications	AR5710-H2T4N2X-NRGL	AR5710-H2T4PN2X-NRGL	AR5710-H2T4N2XW	AR5710-H2T4N2XW-NRGL	AR5710-H2T4N2XW-Q
Operating humidity	5% to 95% (non-condensing)				
Operating altitude	< 5000 m				
Storage temperature	–40°C to + 70°C				

*: Manual switching to the hardware forwarding mode is required.
**: Scenario where the SD-WAN IPsec performance specification applies: IPsec, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions. The IMIX forwarding performance in Info-Finder is removed from R25C10 and is now displayed as the forwarding performance of packets with a size of 512 bytes. If you need the forwarding performance information of packets with a size of 512 bytes, you can switch to a version earlier than R25C00.
***: Scenario where the SD-WAN performance specification applies: IPsec + QoS, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions. The IMIX forwarding performance in Info-Finder is removed from R25C10 and is now displayed as the forwarding performance of packets with a size of 512 bytes. If you need the forwarding performance information of packets with a size of 512 bytes, you can switch to a version earlier than R25C00.
****: Scenario where the typical SD-WAN performance specification applies: IPsec + QoS + SA + AppFlow, peak performance. This specification applies to the combined total of traffic in inbound and outbound directions.
*****: All fixed ports are LAN/WAN interchangeable.
******: The actual number of users varies according to the environment.
*******: By default, a maximum of 32 APs can be managed for free. If the number of APs exceeds 32, licenses must be purchased. NetEngine AR5710-H series supports a maximum of 64 APs.

Software Features and Protocols

Item	NetEngine AR5710-H Series
Basic function	DHCPv4 server/client/relay, DHCPv6 Server/Client/Relay, PPPoE client, NAT, interface management, and DNS
LAN	IEEE 802.1p, IEEE 802.1Q, VLAN management, VLAN aggregation, Voice VLAN, MAC management, STP/RSTP/MSTP, EVC
IPv4 unicast routing	Routing policies, static routing, RIP, OSPF, IS-IS, BGP, IP FRR
IPv6 unicast routing	Static routing, routing policies, RIPng, OSPFv3, IS-ISv6, BGP4+
Basic IPv6 function	IPv6 ND, IPv6 PMTU, IPv6 FIB, IPv6 ACL, ICMPv6, DNSv6, DHCPv6, PPPoE client IPv6, IPv4 over IPv6, IPv6 over IPv4, NAT64
VPN	GRE, GRE over IPsec, Ethernet over GRE, IPsec v4/v6, Segment Routing IPv6 (SRv6), L2TP client, L2TP LNS, DSVPN, IPv4/IPv6 dual-stack, SD-WAN EVPN
WAN optimization	A-FEC and data compression
Multicast	IGMP V1/V2/V3, PIM SM, PIM DM, MSDP, MBGP, IP multicast over SD-WAN
MPLS	MPLS LDP, MPLS L3VPN, dynamic LSP, IP FRR, LDP FRR, MPLS 6VPE, MPLS 6PE, MPLS L2VPN （VPWS）
QoS	Priority mapping, traffic policing (CAR), traffic shaping, congestion avoidance, congestion management, MQC (traffic classifier, traffic behavior, and traffic policy), level-3 traffic scheduling and shaping (HQoS), application identification, intelligent policy-based routing (SPR), SaaS routing, Intelligent Traffic Policing(ITP)
Security	ACL/ACL6, firewall, AAA authentication, RADIUS, HWTACACS, PKI, storm suppression, ARP security, ICMP security, attack defense, URPF, CPCAR, attack source tracing, 802.1X authentication, Portal authentication, port security, integrates NGFW capabilities, offering security policy control based on IP address (groups)/regions/domain groups/users (groups)/applications/time ranges, ASPF, application recognition and control, IPS, URL filtering, Antivirus and SSL-encrypted traffic detection, signature database and antivirus database update, and interconnection with third-party SSE security clouds, PQC supported for SSL, SSH, and SD-WAN DTLS protocols
Management and maintenance	Upgrade management, device management, Telnet, SSH(v1/v2), WEB manager(HTTPS), File Transfer Protocols (SCP, SFTP, FTP, TFTP), OPS, GTL, SNMP (v1/v2c/v3), RMON, NTP, USB-, DHCP option-, and email-based deployment, deployment through the registration query center, NETCONF/YANG/telemetry, TCP FPM, NQA, IFIT, NetStream/NetStream v6, switch RU plug-and-play, web-based management, LLDP for an RU, Event Versus

Item	NetEngine AR5710-H Series
	Action(EVA), TWAMP Light
Reliability	BFD, BFD for IPv6, VRRP, VRRP6, HRP
Wi-Fi feature	• Compliance with IEEE 802.11be and compatibility with IEEE 802.11a/b/g/n/ac/ax • Maximum ratio combining (MRC) • Space time block code (STBC) • Cyclic Delay Diversity (CDD)/Cyclic Shift Diversity (CSD) • Beam forming • Multi-user multiple-input multiple-output (MU-MIMO) • Orthogonal frequency division multiple access (OFDMA) • Compliance with 4096-quadrature amplitude modulation (QAM) and compatibility with 1024-QAM, 256-QAM, 64-QAM, 16-QAM, 8-QAM, quadrature phase shift keying (QPSK), and binary phase shift keying (BPSK) • Low-density parity-check (LDPC) • Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx) • 802.11 dynamic frequency selection (DFS) • Short guard interval (GI) in 20 MHz, 40 MHz, 80 MHz and 160 MHz modes • Wi-Fi multimedia (WMM) for priority mapping and scheduling • WLAN channel management and channel rate adjustment • Automatic channel scanning and interference avoidance • Signal sustain technology (SST) • Unscheduled automatic power save delivery (U-APSD) • Multi-user call admission control (CAC) • Advanced cellular coexistence (ACC), minimizing the impact of interference from cellular networks •STA whitelist and blacklist
WAC	•Management of Wi-Fi 5/6/7 Fit APs •CAPWAP protocol •WLAN user management •WLAN radio management •WLAN QoS •WLAN security •WLAN user roaming Supports 802.11k and 802.11v smart roaming, 802.11r fast roaming (≤ 50 ms) and AI roaming


Safety and Regulatory Standards

Item	NetEngine AR5710-H Series
EMC standards compliance	• EN 55032 • EN 55035 • CISPR 32

Item	NetEngine AR5710-H Series
	• CISPR 35 • IEC/EN 61000-3-2 • EN 61000-3-3 • ETSI EN 300 386 • ETSI EN 301 489-1 • ETSI EN 301 489-3 • ETSI EN 301 489-17 • ETSI EN 301 489-52 • FCC CFR Part 15, Subpart B • ANSI C63.4 • ICES-003 Issue 7 • EN 50121-1 • EN 50121-4 • GB 9254
Environmental standards compliance	• RoHS • REACH • WEEE
Security standards compliance	• IEC 60950-1 • IEC 62368-1 • EN 60950-1 • UL 60950-1 • CSA C22.2 No 60950-1 • GB 4943.1


Application Scenarios

Networking diagram for branch 5G/LTE wireless access

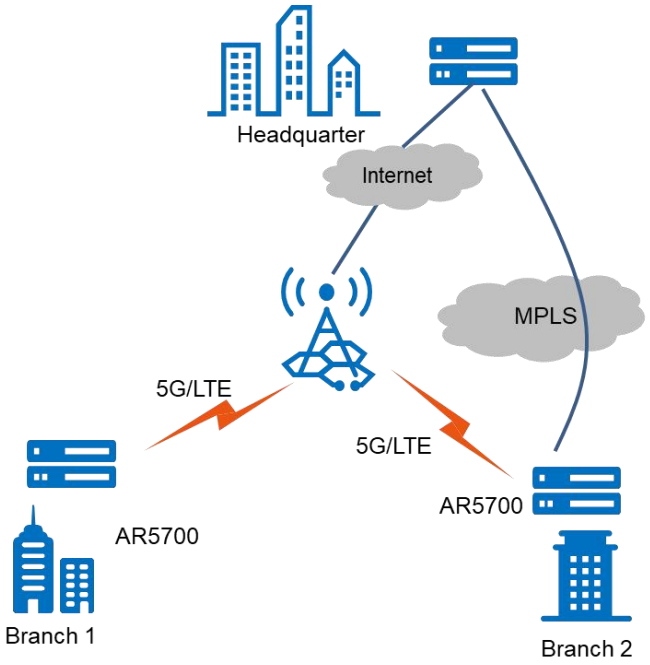


Huawei NetEngine AR5710-H series routers feature 5G/LTE functionality, enabling wireless interconnection between enterprise branches and between the headquarters and branches. 5G/LTE interfaces can function as the active link or as a backup for wired links, enhancing network stability while reducing network construction cost.

SD-WAN networking

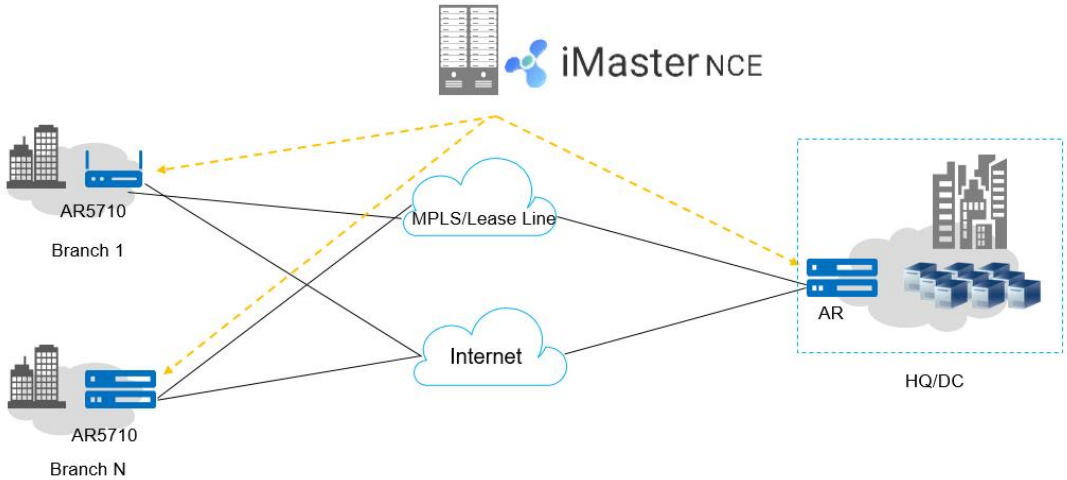

In the SD-WAN solution, the AR5710-H functions as the gateway of the enterprise headquarters or branch and supports extensive physical links, such as MPLS and Internet links. iMaster NCE-Campus provides visualized management for the AR5710-H. The AR5710-H integrates a wide range of SD-WAN features such as intelligent application identification and intelligent traffic steering, delivering better service experience to enterprises. For details about Huawei SD-WAN Solution, visit https://e.huawei.com/en/solutions/enterprise-network/campus-network/branch-campus-network.

VPN networking

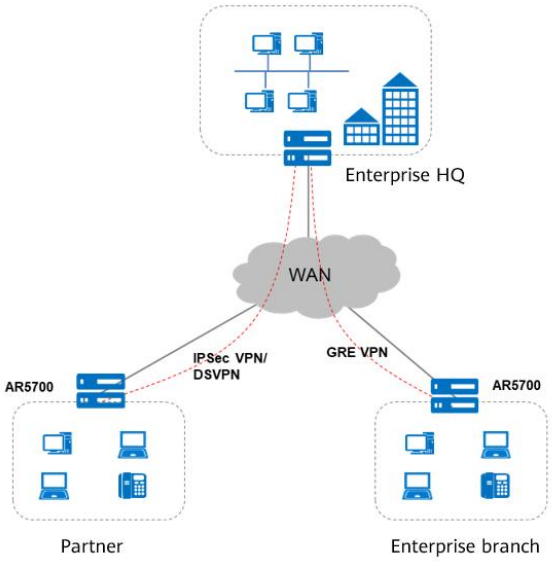

Building different types of VPNs by leveraging Internet resources

The Huawei NetEngine AR5710-H series routers offer a range of secure access features that enable communication between enterprise branches and headquarters, as well as allowing partners to access enterprise resources. Secure tunnels such as GRE VPN, IPsec VPN, DSVPN, and L2TP VPN tunnels can be set up between the headquarters and branches for secure data access and transmission. The AR5710-H supports quick tunnel deployment and authentication for branches. Furthermore, partners authenticated and authorized by the AR5710-H can remotely access the enterprise resources over these tunnels.

Ordering Information

The configuration of the NetEngine AR5710-H series includes device model selection and software configuration.

- Device model

Select the device model according to the uplink interface type and service requirements.

- Software

The NetEngine AR5710-H series software consists of the basic software and licensed software. The basic software provides basic features such as routing, switching, and security, while the licensed software provides additional functions, such as security protection.

Host	Ordering Information
AR5710-H8T2TS1	AR5710-H8T2TS1, 2*GE combo WAN,8*GE LAN, 1*USB, 1*MIC slot
AR5710-H8T2TS1-T	AR5710-H8T2TS1-T, 2*GE combo WAN, 8*GE LAN, 1*USB, 1*MIC slot
AR5710-H4T4N2X	AR5710-H4T4N2X, 2*10GE SFP+ WAN, 4*GE Copper LAN, 4*2.5GE Copper LAN, 1*USB2.0
AR5710-H4T4N2X-LTE4EA	AR5710-H4T4N2X-LTE4EA, 2*10GE SFP+ WAN, 4*GE Copper LAN, 4*2.5GE Copper LAN, 1*LTE4EA, 1*USB2.0
AR5710-H2T4N2X-NRGL	AR5710-H2T4N2X-NRGL, 2*10GE SFP+ WAN, 2*GE Copper LAN, 4*2.5GE Copper LAN, 1*NRGL, 1*USB2.0
AR5710-H2T4PN2X-NRGL	AR5710-H2T4PN2X-NRGL, 2*10GE SFP+ WAN, 2*GE Copper LAN, 4*2.5GE Copper LAN(4*POE++), 1*NRGL, 1*USB2.0

Host	Ordering Information
AR5710-H2T4N2XW	AR5710-H2T4N2XW,2*10GE Combo WAN,4*2.5GE Copper LAN,2*GE Copper LAN,Wi-Fi7 2.4G+5G,1*USB 2.0
AR5710-H2T4N2XW-NRGL	AR5710-H2T4N2XW-NRGL,2*10GE Combo WAN,4*2.5GE Copper LAN,2*GE Copper LAN,Wi-Fi7 2.4G+5G,1*NRGL,1*USB 2.0
AR5710-H2T4N2XW-Q	AR5710-H2T4N2XW-Q, 2*10GE Combo WAN,4*2.5GE Copper LAN,2*GE Copper LAN,Wi-Fi7 2.4G+5G,1*USB 2.0,Fanless

Software sales model	License	Ordering Information
Threat protection service	LAR0TP1401 LAR0TP1402 LAR0TP1403 LAR0TP1404 LAR0TP1405	Threat Protection Service Subscribe x Year (Applies to AR5700) (corresponding model: LAR0TP140x), including: • IPS signature database update • URL remote query for URL filtering • Antivirus signature database update
Independent Sale Model	AR57-LIC-Basic-IFIT	AR5700 Value-added Basic IFIT Package
	AR57-LIC-Enhance-IFIT	AR5700 Value-added Enhanced IFIT Package
	AR57-LIC-Enh-WANOP	AR5700 Value-added Enhanced WAN-Optimize Package, including: • Data Compression
	AR57-LIC-NETCONN	AR5700 Value-added Network Connection Package, including: • DSVPN • MPLS L2VPN (only VPWS is supported)
N1 model	N1-AR57-B	N1 AR5700 CloudCampus Basic Software (exclude SD-WAN), Per Device
	N1-AR57-F	N1 AR5700 CloudCampus Foundation (include SD-WAN), Per Device
	N1-AR57-A	N1 AR5700 CloudCampus Advanced (include SD-WAN), Per Device

Other Information

MIC Interface Module*	Ordering Information
MIC-LTE4EA-V2	TDD/FDD/WCDMA/HSPA+ interface card Interface standards and supported frequency bands: • LTE FDD: bands 1/3/5/7/8/20/28 • LTE TDD: bands 38, 40, and 41 • WCDMA: bands 1, 5, and 8 • GSM: 900 MHz and 1800 MHz Supported rate: • LTE FDD: 50 Mbps uplink rate and 150 Mbps downlink rate • LTE TDD: 30 Mbps uplink rate and 130 Mbps downlink rate • HSPA+: 5.76 Mbps uplink rate and 21 Mbps downlink rate

	• WCDMA: 384 Kbps uplink rate and 384 Kbps downlink rate • EDGE: 236.8 Kbps uplink rate and 236.8 Kbps downlink rate • GPRS: 85.6 Kbps uplink rate and 85.6 Kbps downlink rate • GSM: 9.6 Kbps uplink rate and 14.4 Kbps downlink rate

*: Supported only by the NetEngine AR5710-H8T2TS1/H8T2TS1-T models.

Built-in LTE Model	Supported Standards and Frequency Bands
AR5710-H4T4N2X-LTE4EA	• LTE FDD: B1/B2/B3/B4/B5/B7/B8/ B18/B19/B20/B26/B28/B66 • LTE TDD: B38/B40/B41 • WCDMA: B1/B5/B8 • GSM: B3/B5/B8

Built-in 5G Model	Supported Standards and Frequency Bands
AR5710-H2T4N2X-NRGL AR5710-H2T4PN2X-NRGL AR5710-H2T4N2XW-NRGL	•5G NR SA: Band 1/3/5/7/8/20/28/38/40/41/75/77/78/79/80/81/82/83/84 •5G NR NSA: Band 1/3/5/7/8/20/28/38/40/41/77/78/79 •LTE FDD: Band 1/2/3/5/7/8/18/19/20/26/28 •LTE TDD: Band 34/38/39/40/41/42/43 Supported Rates: •5G SA: Uplink 500 Mbps, Downlink 5.0 Gbps •5G NSA: Uplink 125 Mbps, Downlink 3.6 Gbps

Support 5G RU Model	Supported Standards and Frequency Bands
AR5710I-RU-NRGL	•5G: NR Band 1/3/5/7/8/20/28/38/40/41/75/77/78/79/80/81/82/83/84 •LTE: Band 1 1/3/5/7/8/18/19/20/26/28/32/34/38/39/40/41/42/43 •DL MIMO: 5G 4x4: NR Band 1/3/7/38/40/41/77/78/79 5G 2x2: NR Band 5/8/20/28/75 LTE 4x4: Band 1/3/7/38/39/40/41/42/43 LTE 2x2: Band 5/8/18/19/20/26/28/32/34 •UL MIMO: 5G 2x2: NR Band1/38/40/41/77/78/79 Supported Rates: •5G SA: Theoretical uplink peak of 500 Mbps, theoretical downlink peak of 5.4 Gbps •5G NSA: Theoretical uplink peak of 125 Mbps, theoretical downlink peak of 3.6 Gbps

Support Switch RU	Models
Switch RU	CloudEngine S5731-L series, CloudEngine S5731S-L series, CloudEngine S5731I-L series, CloudEngine S5751-L series

More Information

For more information, visit https://e.huawei.com/en/ or contact us in the following ways:

- Global service hotline: http://e.huawei.com/en/service-hotline
- Logging in to the Huawei Enterprise technical support website: http://support.huawei.com/enterprise/
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied. The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian, Longgang Shenzhen 518129 People's Republic of China

Website: www.huawei.com