


### PartNO.:FYM-23881AX/BX-XX

#### **DESCRIPTION**

- 60.20mm (2.3") Φ5.0 dot matrix LED display.
- Standard brightness.
- Low current operation.
- Excellent character apperance.
- Easy mounting on P.C.boards or sockets

### Package Dimensions & Internal Circuit Diagram

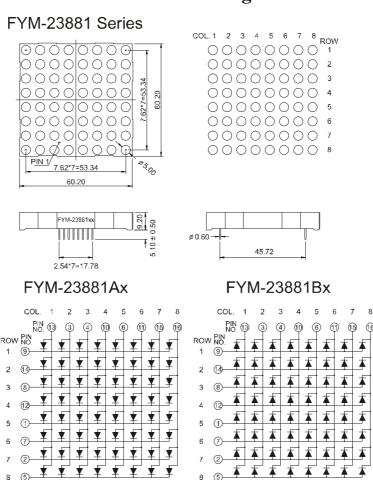

#### Notes:

- · All dimensions are in millimeters (inches)
- Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
- · Specificaions are subject to change whitout notice.



## PartNO.:FYM-23881AX/BX-XX

ZIP.: 315051

FAX:0086-574-87927917

E-mail:sales@foryard.com

### : Absolute maximum ratings ( $Ta=25^{\circ}C$ )

Dayamatay	Symbol	Test Condition	Va		
Parameter			Min	Max	Unit
Reverse Voltage	VR	IR=30μA	5		V
Forward Current	IF			30	mA
Power Dissipation	Pd			100	mW
Pulse Current	Ipeak	Duty=0.1mS, 1KHz		150	mA
Operating Temperature	Topr		-40	+85	° C
Storage Temperature	Tstr		-40	+85	° C

#### • -XX: Surface / Lens color:

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	



PartNO.:FYM-23881AX/BX-XX


#### **■** Description:

• Color Code & Chip characteristics: (Test Condition: IF=20mA)

		Dice	s. (Test Condit			vard	
Emitting Color		Material	Peak Wave Length( <sup>λ</sup> P)	Spectral Line halfwidth(	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv)
				∆λ1/2 <sub>)</sub>	Тур	Max	Unit:mcd
Н	Red	GaP	700nm	90nm	2.20	2.50	5.0
S, SR	Hi Red	AlGaAs,SH	660nm	20nm	1.80	2.20	15-20
D	Super Red	AlGaAs,DH	660nm	20nm	1.80	2.20	20-30
LR	Ultra Red	AlGaAs,DDH	660nm	20nm	1.90	2.40	26-38
HR	HE Red	GaAsP	640nm	45nm	1.90	2.40	50-80
Е	Orange	GaAsP	630nm	35nm	2.10	2.50	10-20
Α	Amber	GaAsP	610nm	35nm	2.10	2.50	15-20
Υ	Yellow	GaAsP	590nm	35nm	2.10	2.50	15-20
G	Green	GaP	570nm	30nm	2.20	2.50	14-18
Ultra	a brightness						
UH R	Ultra Hi Red	AlGalnP	645nm	20nm	2.10	2.50	80-150
UE	Ultra Orange	AlGalnP	630nm	20nm	2.10	2.50	180-210
UA	Ultra Amber	AlGalnP	610nm	20nm	2.10	2.50	90-120
UY	Ultra Yellow	AlGalnP	590nm	20nm	2.10	2.50	150-200
UG	Ultra Green	AlGalnP	570nm	30nm	2.20	2.50	60-100
PG	Ultra Pure Green	InGaN	520nm	36nm	2.80	3.80	260-310
BG	Ultra Blue Green	InGaN	505nm	36nm	2.80	3.80	260-310
В	Blue	InGaN	430nm	30nm	2.80	3.80	10-20
UB	Ultra Blue	InGaN	470nm	30nm	2.80	3.80	80-90
UB		IIIGain	460nm	30nm	2.80	3.80	80-90
V	UV	InGaN	405nm		2.80	3.80	5-8
W	White	InGaN	X=0.29,y=0.30		2.80	3.80	180-200
U W	Ultra White	InGaN	X=0.29,y=0.30		2.80	3.80	180-200
Segment-to-Segment Luminous Intensity ratio(Iv-M) 1.5:1							


ADD: NO.115 QiXin Road NingBo Zhejiang China ZIP.: 315051 TEL: 0086-574-87927870 87933652 FAX:0086-574-87927917 <u>Http://www.foryard.com</u> E-mail:sales@foryard.com

### PartNO.:FYM-23881AX/BX-XX

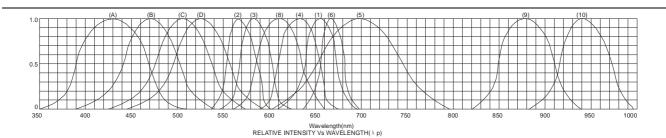


- (1) GaAsP/GaAs 655nm/Red
- (2) GaP 570nm/Yellow Green
- (3) GaAsP/GaP 585nm/Yellow
- (4) GaAsp/GaP 635nm/Orange & Hi-Eff Red
- (5) GaP 700nm/Bright Red
- (6) GaAlAs/GaAs 660nm/Super Red
- (8) GaAsP/GaP 610nm/Super Red


- (9) GaAlAs 880nm
- (10) GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) GaN/SiC 430nm/Blue
- (B) InGaN/SiC 470nm/Blue
- (C) InGaN/SiC 505nm/Ultra Green
- (D) InGaAl/SiC 525nm/Ultra Green




FORWARD VOLTAGE (Vf) FORWARD CURRENT VS. FORWARD VOLTAGE





FORWARD CURRENT (mA) RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT



AMBIENT TEMPERATURE TA( °C) FORWARD CURRENT VS. AMBIENT TEMPERATURE








NOTE:25 °C free air temperature unless otherwise specified

Http://www.foryard.com



## PartNO.:FYM-23881AX/BX-XX

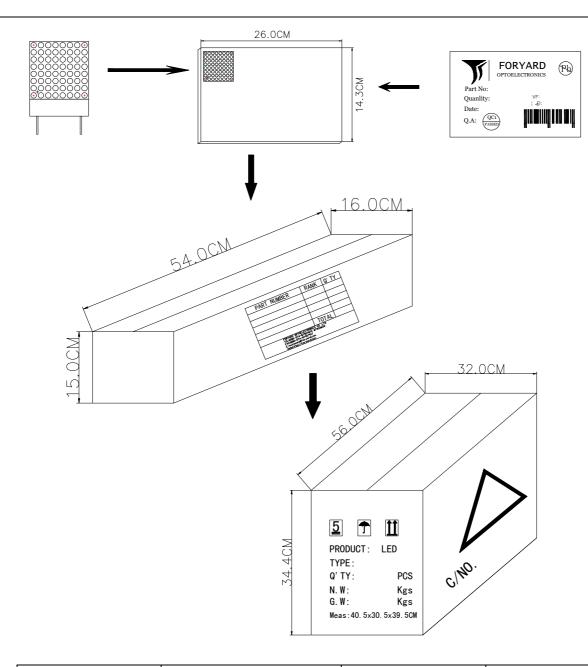

type	QTY/foam(pcs)	QTY /Bundle (pcs)	QTY / CARTONDimension
FYM-23881ABx-xx	2*4=8	8*14=112	112*4=448

ADD: NO.115 QiXin Road NingBo Zhejiang China TEL: 0086-574-87927870 87933652 FAX:008 Http://www.foryard.com E-mail:sa

Zhejiang China ZIP.: 315051 FAX:0086-574-87927917 E-mail:sales@foryard.com