

#### 材质及电镀

间距: 5.08mm  
极数: 2P-12P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍  
触点材料: 黄铜、镀锡  
塑件: PA66.UL94V-0

#### 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC1500V/1Min

#### 机械性能

温度范围:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
瞬时温度:  $+250^{\circ}\text{C}$  5秒  
剥线长度: 7-8mm

#### MATERIAL






Pitch: 5.08mm  
Poles: 2P-12P  
Screw: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronzeNi plated  
Contact: Brass, Tin plated  
Housing: PA66. UL94V-0

#### ELECTRICAL

rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC1500V/1Min

#### MECHANICAL

Temperature range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
MAX soldering:  $+250^{\circ}\text{C}$  for 5 sec.  
Strip length: 7-8mm

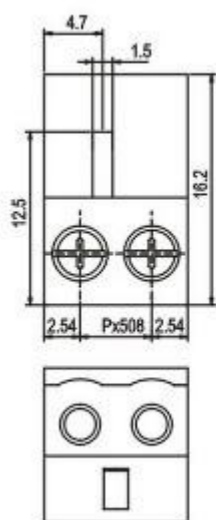

N=Number of contacts

#### P.C.B.LAYOUT

