

Solenoid Valve Matrix 758



758 VACUUM • 2/2

NC NO



CONTROL:

DIRECT

PFM


PNM

PWM

N. 8 NC




N. 8 NO




GENERAL CHARACTERISTICS


FLUID	Non-lubricated dry air, neutral gases (-10 + 50°C)		
FILTRATION RATING	Min 40 micron		
TEMPERATURE	- 10 + 50°C (Standard version)		
RESPONSE TIME IN OPENING	12 / 24 < 7 ms	JJ < 5 ms	XX / KK < 2 ms
RESPONSE TIME IN CLOSING	12 / 24 < 3 ms	JJ < 2 ms	XX / KK < 2 ms
MAXIMUM FREQUENCY	100 Hz	200 Hz	300 Hz
WEIGHT	350 g		
PRODUCT LIFE EXPECTANCY	≥ 500 M/s cycles		
IP RATING	IP 52 - IP 62 - IP 65		

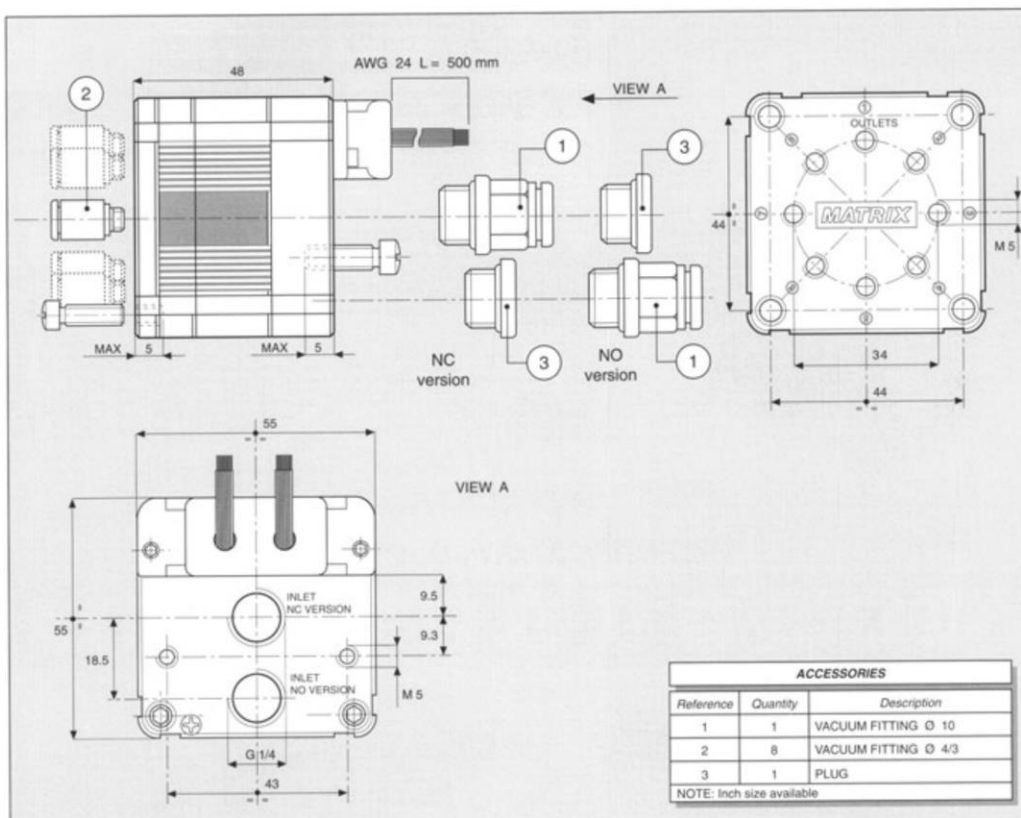

CHARACTERISTICS OF THE ELECTRICAL CONTROL - MODELS KK

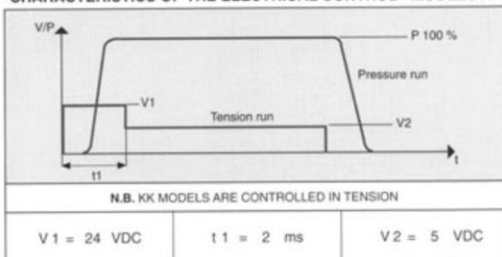

CHARACTERISTICS OF THE ELECTRICAL CONTROL - MODELS XX

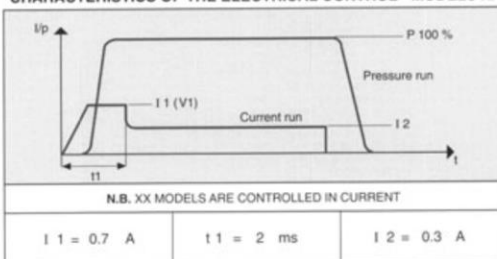

ELECTRICAL PORT CONNECTION

COLOUR	8 CONTROLS
BLACK	COMMON
BROWN	1
RED	2
ORANGE	3
YELLOW	4
GREEN	5
BLUE	6
VIOLET	7
GREY	8