


Лаба 10

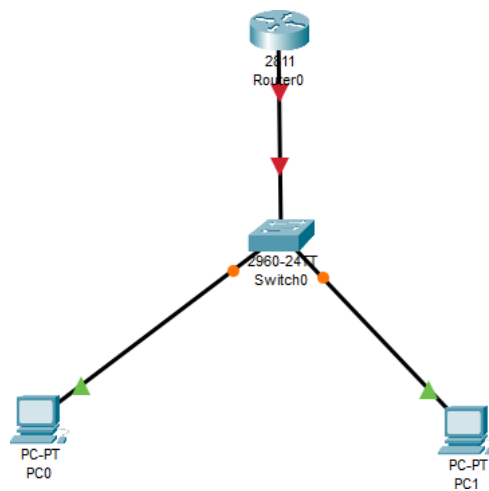

```
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

Static	MAC Address	0001.9660.D301
RIP	IP Configuration	
SWITCHING	IPv4 Address	
VLAN Database	Subnet Mask	
INTERFACE		
FastEthernet0/0	Tx Ring Limit	10
FastEthernet0/1		

Physical **Config** CLI Attributes

GLOBAL ⬆

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.9660.D301

IP Configuration

IPv4 Address 192.168.0.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

IP Configuration

☒ DHCP

☐ Static

IPv4 Address 192.168.0.2

Subnet Mask 255.255.255.0

IPv6 Configuration

IP Configuration

☒ DHCP

☐ Static

IPv4 Address 192.168.0.3

Subnet Mask 255.255.255.0

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```