Лаба 7


```
VLAN Name                             Status     Ports
---- -------------------------------- ---------  -------------------------------
1    default                          active     Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                                 Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                                 Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                                 Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                                 Fa0/23, Fa0/24, Gig0/1, Gig0/2
2    programmer                       active     Fa0/1, Fa0/2, Fa0/3
3    bubg                             active     Fa0/4, Fa0/5, Fa0/6
```
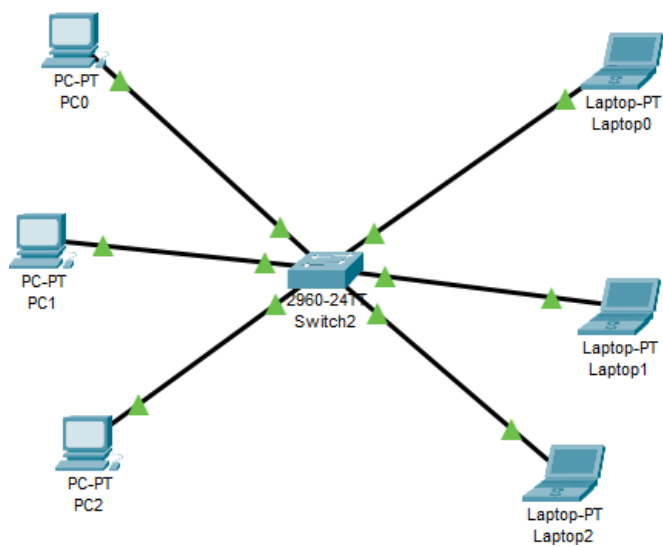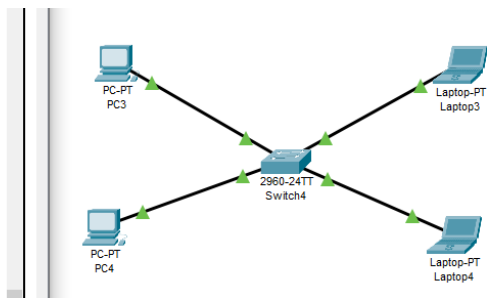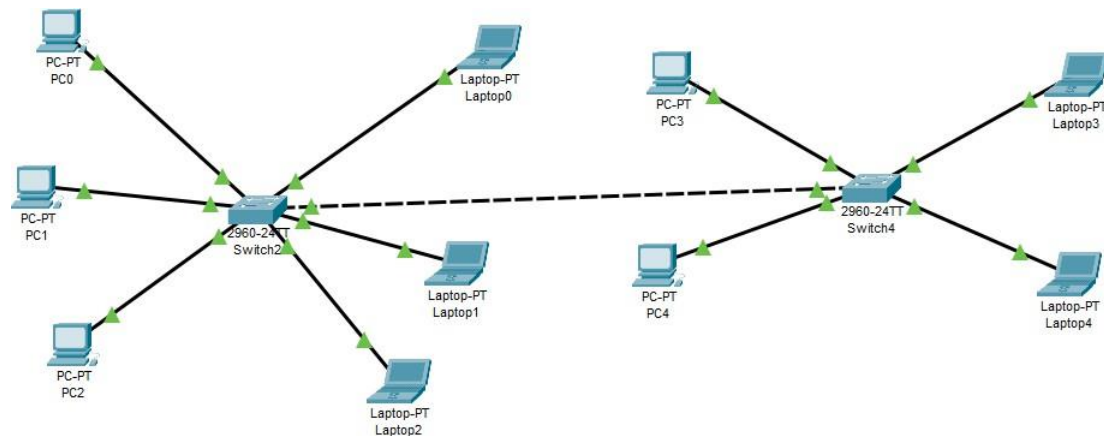
```
Switch#write memory
Building configuration...
[OK]
Switch#show vlan

VLAN Name                         Status    Ports
---- ---------------------------- --------- -----------------------------
1    default                      active    Fa0/5, Fa0/6, Fa0/7, Fa0/8
                                            Fa0/9, Fa0/10, Fa0/11, Fa0/12
                                            Fa0/13, Fa0/14, Fa0/15, Fa0/16
                                            Fa0/17, Fa0/18, Fa0/19, Fa0/20
                                            Fa0/21, Fa0/22, Fa0/23, Fa0/24
                                            Gig0/1, Gig0/2
2    programmer                   active    Fa0/1, Fa0/2
3    bubg                         active    Fa0/3, Fa0/4
1002 fddi-default                 active
1003 token-ring-default           active
1004 fddinet-default              active
1005 trnet-default                active
```

```
Switch(config)#int gig0/1
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Switch(config-if)#switchport trunk allowed vlan 2, 3
                                                   ^
% Invalid input detected at '^' marker.

Switch(config-if)#switchport trunk allowed vlan 2,3
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#wr memory
Building configuration...
[OK]
```
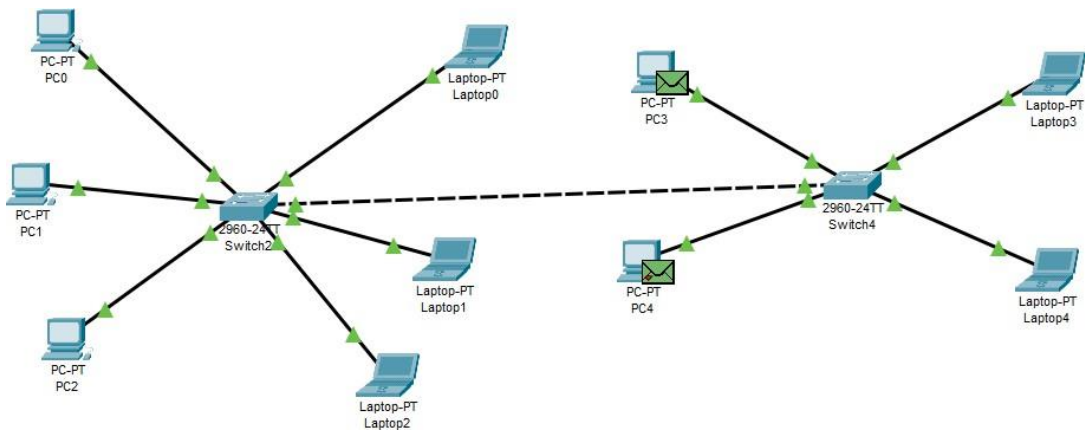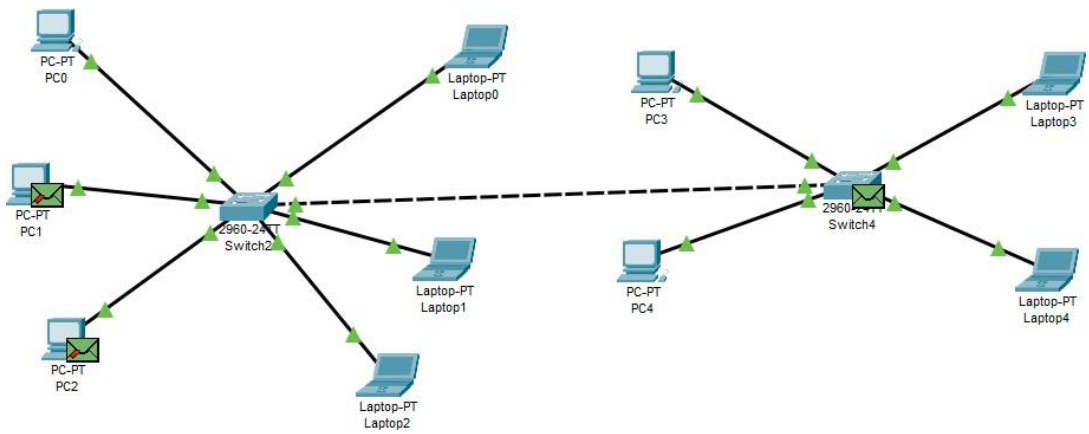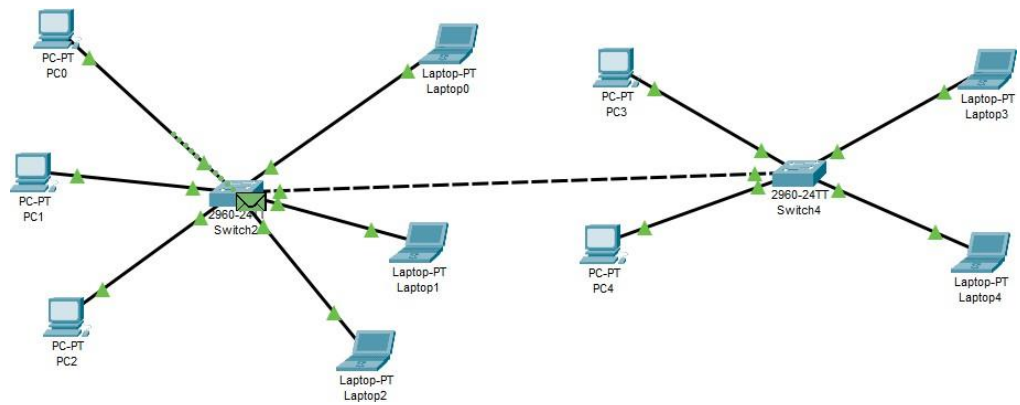
```
Switch(config)#int gig0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 2,3
Switch(config-if)#exit
Switch(config)#^Z
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#wr memory
Building configuration...
[OK]
```

ping от laptop0 pc4

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.8

Pinging 192.168.0.8 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.0.8:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

laptop0 laptop4

```
C:\>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:

Reply from 192.168.0.10: bytes=32 time<1ms TTL=128
Reply from 192.168.0.10: bytes=32 time<1ms TTL=128
Reply from 192.168.0.10: bytes=32 time<1ms TTL=128
Reply from 192.168.0.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```