



AK-1604-N-BWB



GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C

STANDARD MATRIX CIRCUIT DIAGRAM

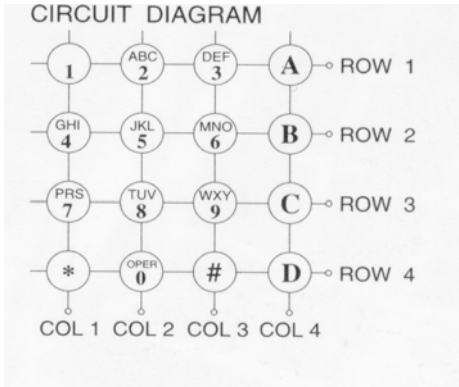

AK-1604

OUTPUT ARRANGEMENT		
OUTPUT	PIN NO.	SYMBOL
1		COL 1
2		COL 2
3		COL 3
4		COL 4
5		ROW 1
6		ROW 2
7		ROW 3
8		ROW 4

