


NOTE:

Signal direction is shown for each pin. The Tx(n)RTS pins and the Rx(n)BF pins can be configured as general purpose I/O in which case the indicated direction may be incorrect.

Optional Connector

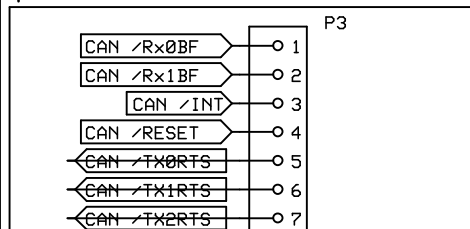

CAN Additional lines for less SPI trfc

- Add if Less SPI traffic per send/receive desired
- Pins 1-3 provide the next-best performance gain
- You may add 4-7 if desired

MCP2515 I/F for Propeller CAN I/F and Header Locations

Stephen Moraco
- K20Q

Rev A0
04 Nov 2007

Page 1 of 1