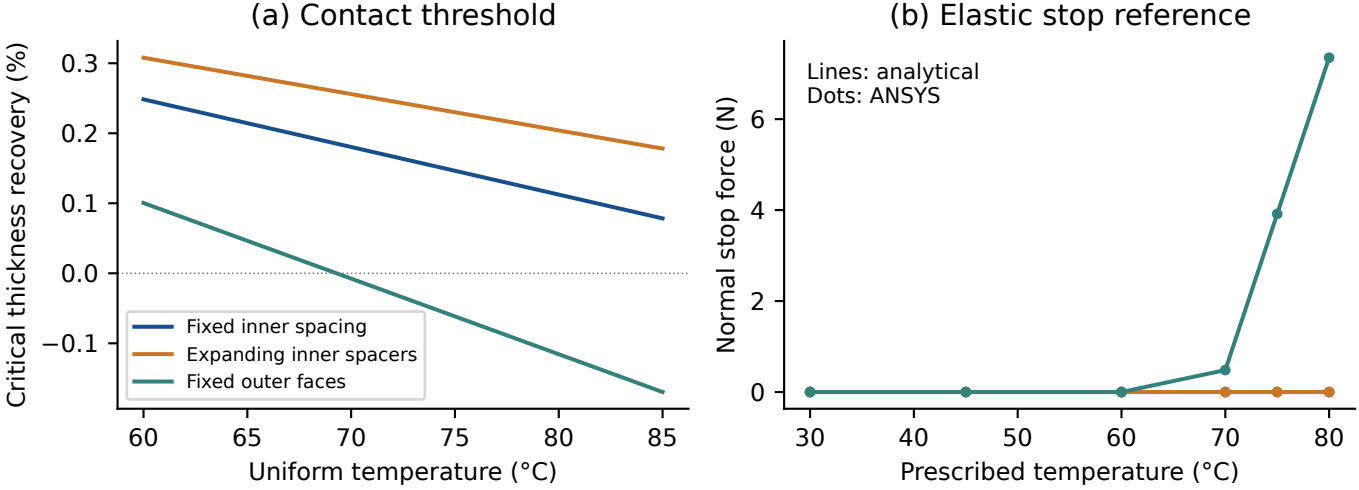
(a) Contact threshold
Critical thickness recovery (%)
0.3
0.2
0.1
0.0
−0.1
Fixed inner spacing
Expanding inner spacers
Fixed outer faces
60
65
70
75
80
85
Uniform temperature (°C)
(b) Elastic stop reference
Lines: analytical
Dots: ANSYS
Normal stop force (N)
6
4
2
0
30
40
50
60
70
80
Prescribed temperature (°C)