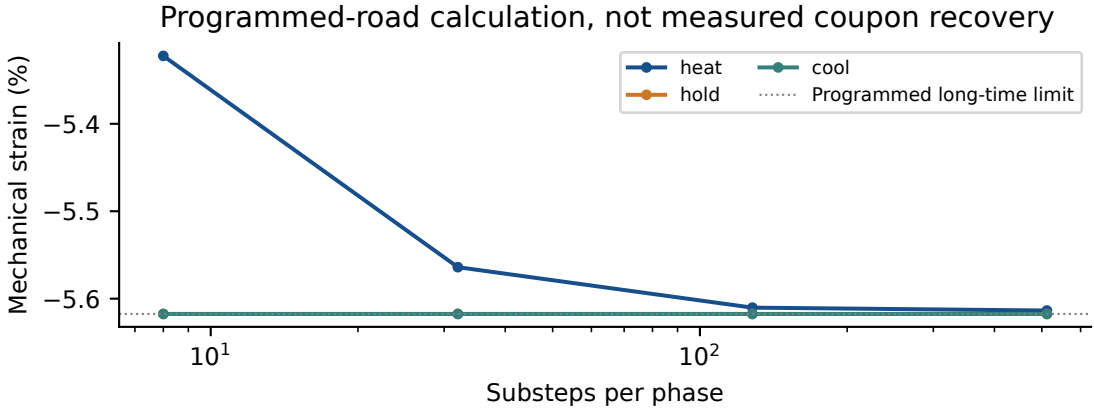
Programmed-road calculation, not measured coupon recovery
heat
hold
cool
Programmed long-time limit
Mechanical strain (%)
−5.4
−5.5
−5.6
10^1
10^2
Substeps per phase