





AUTOMATIC BRUSH OILER-Relationship SOP

MACHINE TYPE: TM-106 SERIAL NUMBER :M.02215


FP McCANN (Cadeby)

ORDER : C22004

YEAR OF PRODUCTION 2023

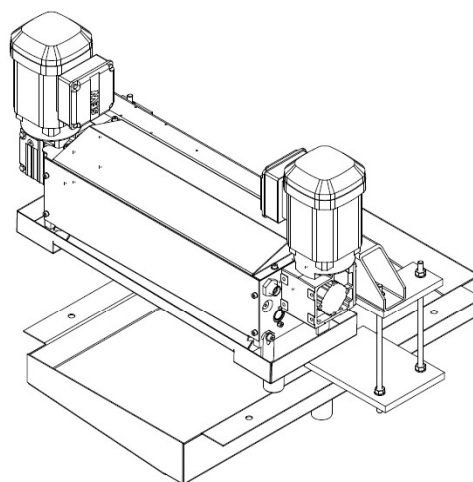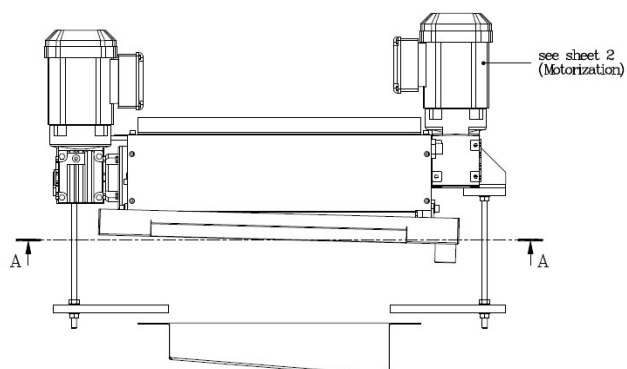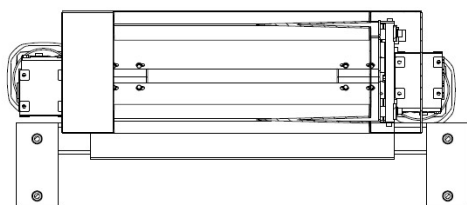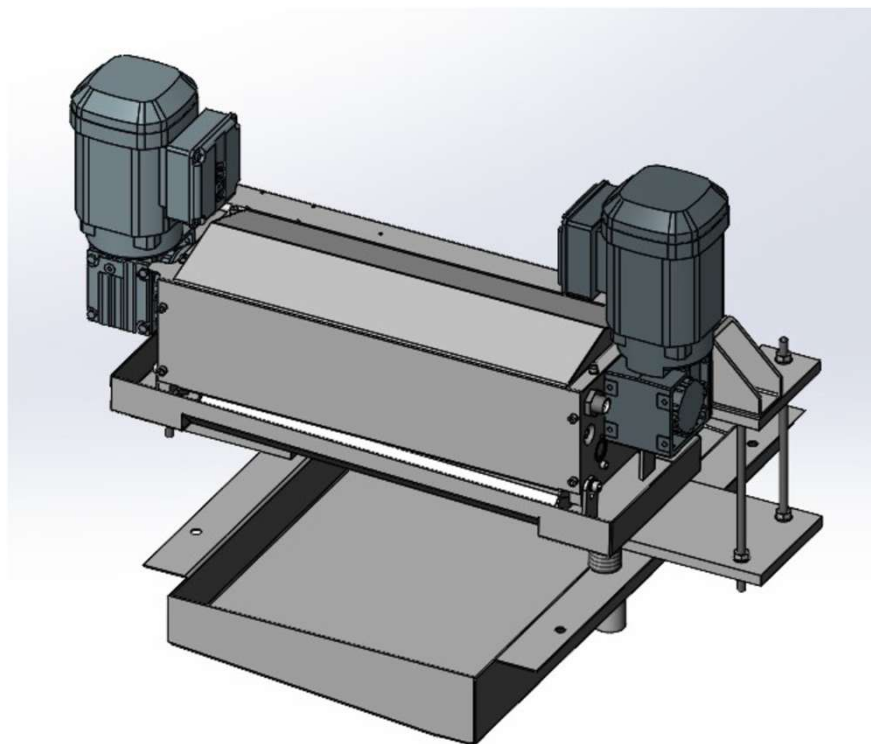


SOP M.02215.00 Contents List Automatic Brush Oiler
SOP M.02215.01 Automatic Brush Oiler

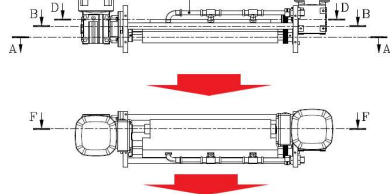AUTOMATIC BRUSH OILER**MACHINE TYPE:TM-106 SERIAL NUMBER :M.02215****Automatic Brush Oiler****277940****HYDRAULIC
POWER UNIT****288230****GEARMOTOR**see sheet 5
(oil feeding pipes)**288229****GEARMOTOR****281333****BRUSH**

SECTION F-F



SECTION A-A

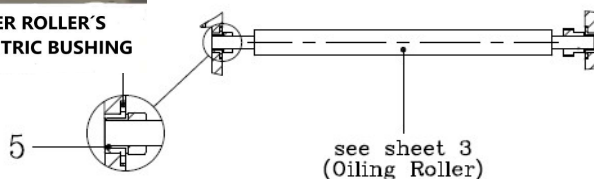281333**BRUSH****277672****OILER ROLLER'S
ECCENTRIC BUSHING**see sheet 3
(Oiling Roller)**General Description and Function**

*This equipment is an automatic curtain-type oil applicator

* Its function is to apply a uniform and controlled layer of mould release oil onto the mould surface.

*A moving brush generates an oil curtain, ensuring a homogeneous distribution that is essential for the demolding process and the surface quality of the final product.

Critical Points and Risk Management**Condition of the Application System (Brush and Roller):**

*A worn, loose, unbalanced brush, or a worn dosing roller causes an uneven oil distribution, leading to product defects and contamination from dripping.

Integrity of the Oil Supply System:

*Any obstruction, leak, or malfunction in the hydraulic power unit, pipes, or the three nozzles feeding the applicator tank interrupts the constant oil flow.

This results in insufficient application and risk of the product sticking to the mould.

Dosing Accuracy:

*The amount of oil applied is a master parameter. A variation in the weight of oil applied per cycle indicates wear in the dosing components (roller, pumps) or pressure/viscosity variations.

Residue Buildup and Cleaning:

*Accumulation of residual oil and dust in the collection tray, filters, and equipment surfaces alters fluid viscosity, clogs passages, and affects application accuracy.

SUPERVISION LEVEL**WEEKLY****281333 Brush (1 u)****277683 Oiling roller (2 units)****277672 Oiling roller's eccentric bushing (2 units)****Inspect for wear, bristle integrity, and fixation to the shaft.****MONTHLY****277728 90° male/female elbow - d=15 - AISI316FG - inox****277675 Sides centering shaft (2 units)****277687 Brush support shaft (1 u)****288229 Gearmotor (1 u)****288230 Gearmotor (1 u)****277940 Hydraulic power unit (SHO15171) (1 u)**

Verify noise, vibration, temperature, and fastener tightness.

Check oil level, working pressure, leaks, condition of pumps and valves.

DAILY

Visual control of the oil curtain: uniformity, continuity, and absence of anomalous dripping or splashing.

WEEKLY

Record the weight of oil consumed in a standard cycle for trend control and reference.

CLEANING**WEEKLY**

*Clean the surplus oil collection tray, the return line filter to the main tank, and the external surfaces of the applicator and power unit.