


ROTARY-RACK 45

MACHINE TYPE: HT-103 SERIAL NUMBER :M.02225

FP McCANN (Cadeby)

ORDER : C22004

YEAR OF PRODUCTION 2023

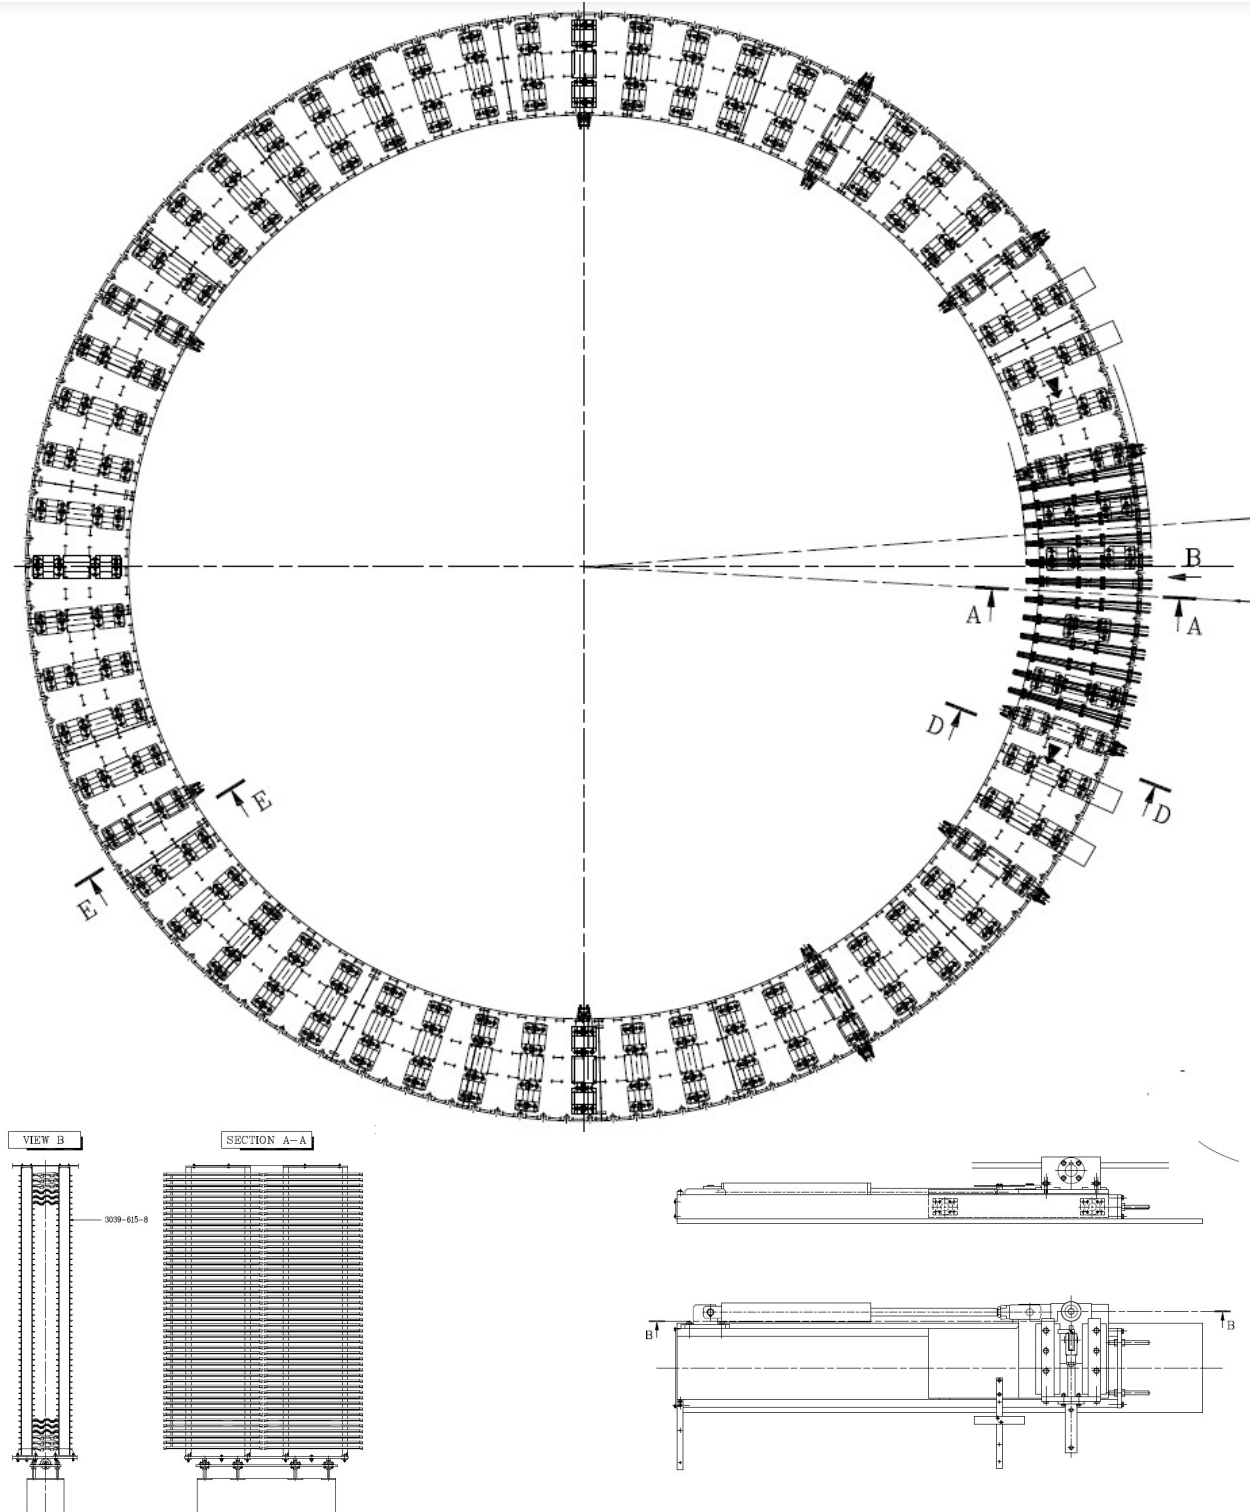

SOP M.02225.00 Contents List ROTARY-RACK 45

SOP M.02225.01 Rotary-rack 45

SOP M.02225.02 Rotary Step Indexer

ROTARY-RACK 45


MACHINE TYPE: HT-103 SERIAL NUMBER :M.02225

Rotary-rack 45




288944

GUIDE FOR RACK



VIEW B



SECTION A-A

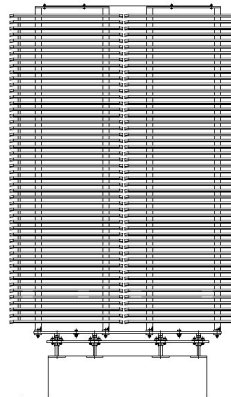

SECTION F-F

288944

GUIDE FOR RACK




46120

WHEEL HOLDER SHAFT


SECTION D-D



SECTION E-E



SECTION M-M



3039-432

3039-433

General Description and Function

*The Rotary Rack consists of a rotating circular structure, mounted on a fixed base with support wheels, rising across 50 independent levels or trays. Each level is equipped with paired angular guides (left/right) that hold the molds with fresh tiles. This configuration enables the simultaneous storage, transport, and curing of the entire load ensuring a uniform thermal process

Critical Points and Risk Management

Travel System Control:

The lower and side support wheels, along with their axles, are critical for stable rotation and overall structure alignment. Any wear or misalignment will cause vibrations, accelerated guide wear, and potential tile damage.

Guide Integrity and Cleanliness:

*The condition of the 30,000 angular guides is vital. Accumulated dirt (concrete residue, dust) or their wear can:

- *Cause abrasion and damage to the fresh tile side surfaces.
- *Alter the mould's path, causing jams or misalignment.
- *Generate more residue through friction, creating a contamination cycle.

Bearing Lubrication:

*Proper greasing of the bearings in all support wheels is essential for smooth movement and to prevent premature failure due to friction.

SUPERVISION LEVEL

DAILY

288944 Guide for rack (Deracker / Racker)
46120 Wheel holder shaft (Deracker / Racker)
21647 Wheel + Bearing (it. 19500) (Deracker / Racker)
Visual inspection of accessible guides and wheels visible from the lower pit. (Adequate lighting is required)

WEEKLY

288944 Guide for rack (30000 units)
46120 Wheel holder shaft (238 units)
21647 Wheel + Bearing (it. 19500) (260 units)
55435 Wheel support (10 units)
55437 Wheel support (6 units)

Full perimeter inspection, verification of wheels and guides, and lubrication.

Lubrication:

*Apply grease to the bearings of all wheels according to manufacturer specifications.

*Check levels in automatic systems.

CLEANING

*Is vital to prevent tile damage. The frequency (daily, weekly, monthly) must be determined based on observed issues (amount of concrete residue).

For cleaning guides and structural components:




*Loose Residue/Dust:
*Use a low-pressure air gun (< 3 bar) followed by dry cloths.

Adhered Concrete Residue:

*Use plastic or wooden scrapers and stiff-bristle brushes (never metallic) to avoid damaging surfaces.

Critical Areas:

*Pay special attention to the base and inner sides of the angular guides.

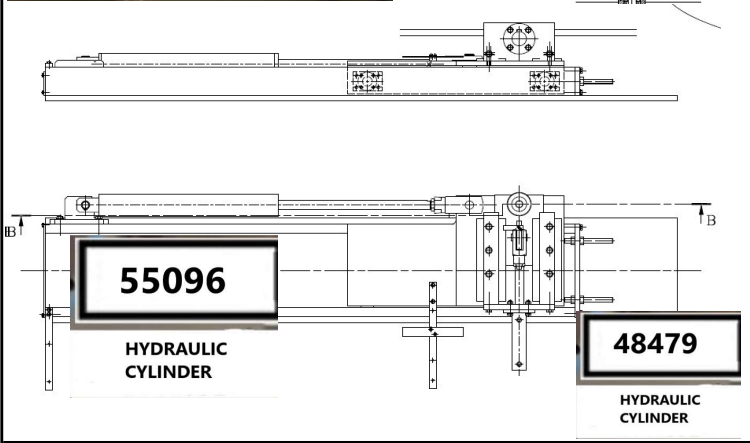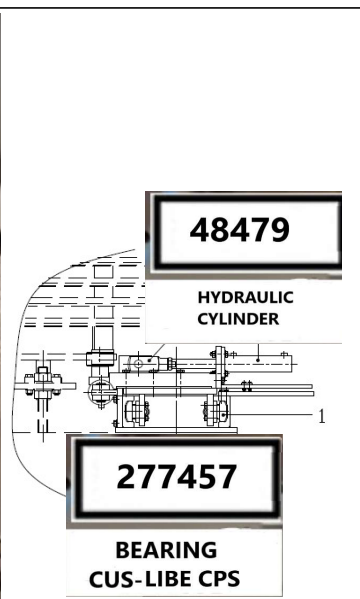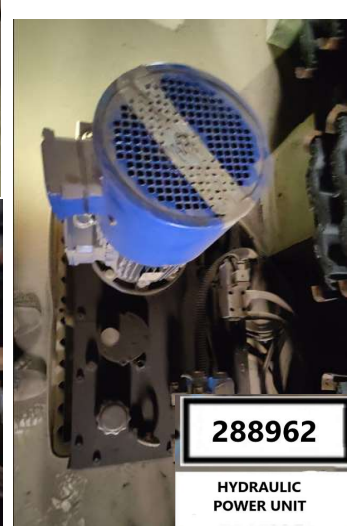VORTEX HYDRA	STANDARD OPERATING PROCEDURE	Code: SOP M.02225.02 Date: 15/12/25 Page: 3 de 3
ROTARY-RACK 45		
MACHINE TYPE: HT-103 SERIAL NUMBER :M.02225		
Rotary Step Indexer		
    		General Description and Function *This assembly is the mechanism that performs the step-by-step (indexing) advance of the Rotary structure , precisely positioning it at the designated points for loading and unloading all tile moulds stored on its angles /pallet guides. Critical Points and Risk Management Positioning Accuracy: * The stop position must be perfect to allow pushers to insert and extract moulds without interference at the Rotary's entry and exit points. Hydraulic Operational Parameters: *It is crucial to maintain the specified working pressure and correct oil level in the hydraulic power unit's reservoir. Deviations directly affect the force, speed, and accuracy of movement. SHEET PROCESS Process documentation must include and keep the following reference values updated: *Advance and stop positions of the hydraulic cylinders to confirm a consistent advance every cycle. * Working pressure of the hydraulic power unit. *Oil level to be maintained in the reservoir. *Advance and retraction times for each pusher, for every stop point inside the Rotary-Rack 45. SUPERVISION LEVEL WEEKLY 277457 Bearing CUS-LIBE CPS0023 (4 units) 18000 Bearing 6206 2RSR (2 units) 10151 Small wheel (1 u) 43653 Guide (2 units) 48479 Hydraulic cylinder with flange (1 u) 55096 Hydraulic cylinder with female hinge (1 u) <u>Check bearings, wheels, guides, and perform visual</u> MONTHLY 276856 Fork for pneumatic cylinder (1 u) 2769 40 Fork for pneumatic cylinder (1 u) 55090 Pivot (1 u) 288962 Hydraulic power unit (ref. scheme SHO.1130.1) (1) <u>Verify forks, pivots, fasteners, connectors, and and solenoid valves.</u> Parameter Verification: *Verify that the working pressure and oil level are within the ranges specified in the documentation Mechanical Inspection: *Verify the tightness and condition of cylinder fasteners and forks. Hydraulic Inspection: *Check the integrity of connectors, hydraulic hoses and solenoid valves on the power unit. Area Inspection: *Look for oil contamination CLEANING WEEKLY *Surfaces and sides of the hydraulic power unit, contours of the cylinders, and their brackets. *Use appropriate tools (brushes, dry cloths) to remove dust, debris, and any accumulated material. *Prevent dirt from clogging breathers or entering connectors.