


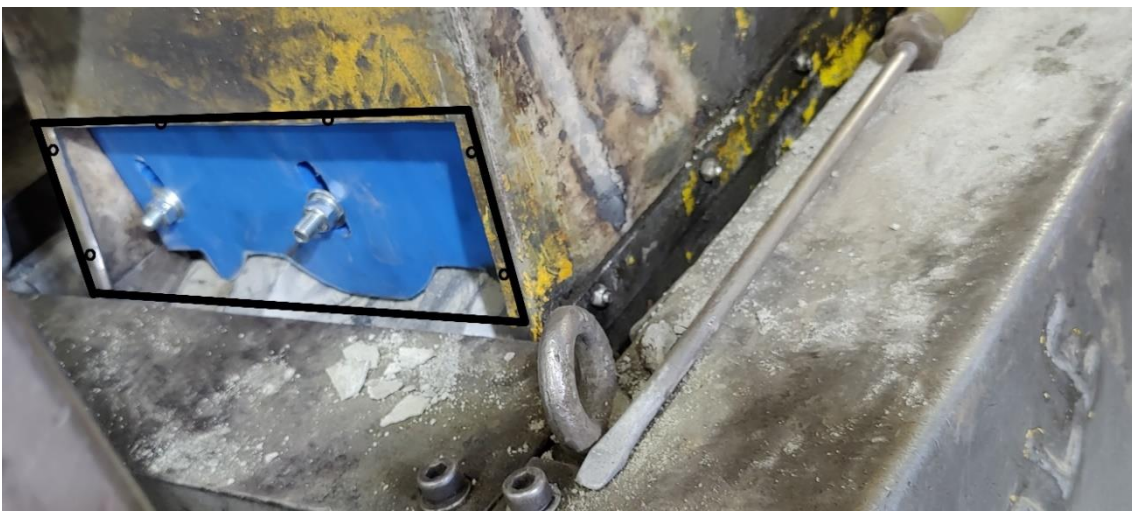
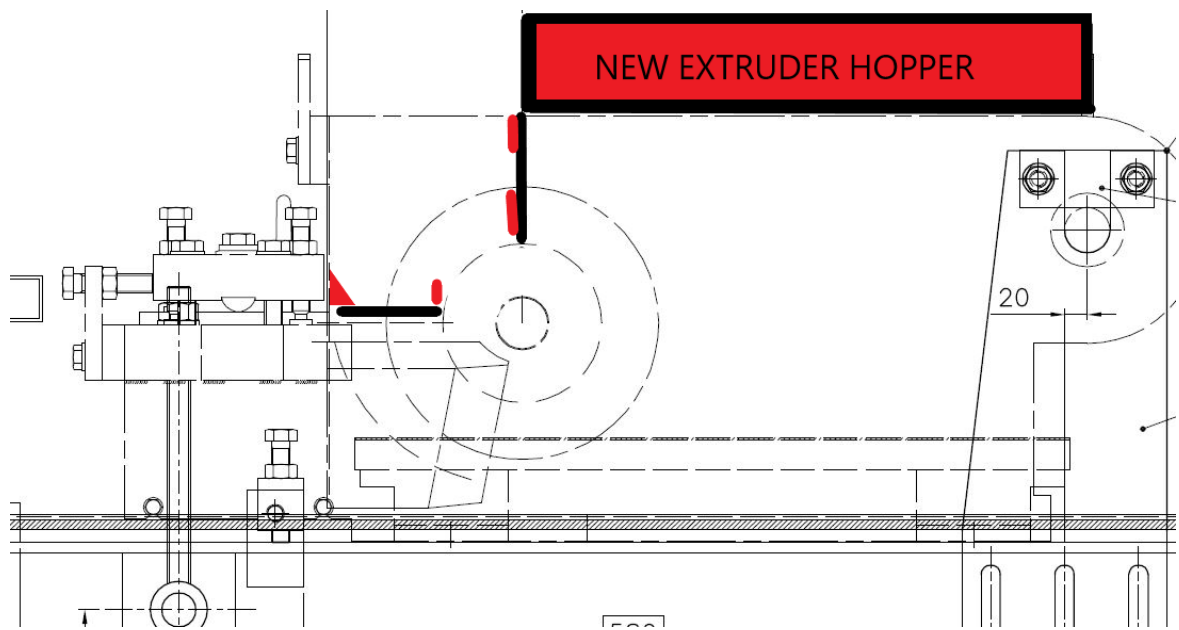


DEVELOPEMENT RIDGE TILES WACOL 070223

Before considering possible improvement developments on the line with the baffle in place, the cleanliness of the sides of the moulds must first be ensured/guaranteed.

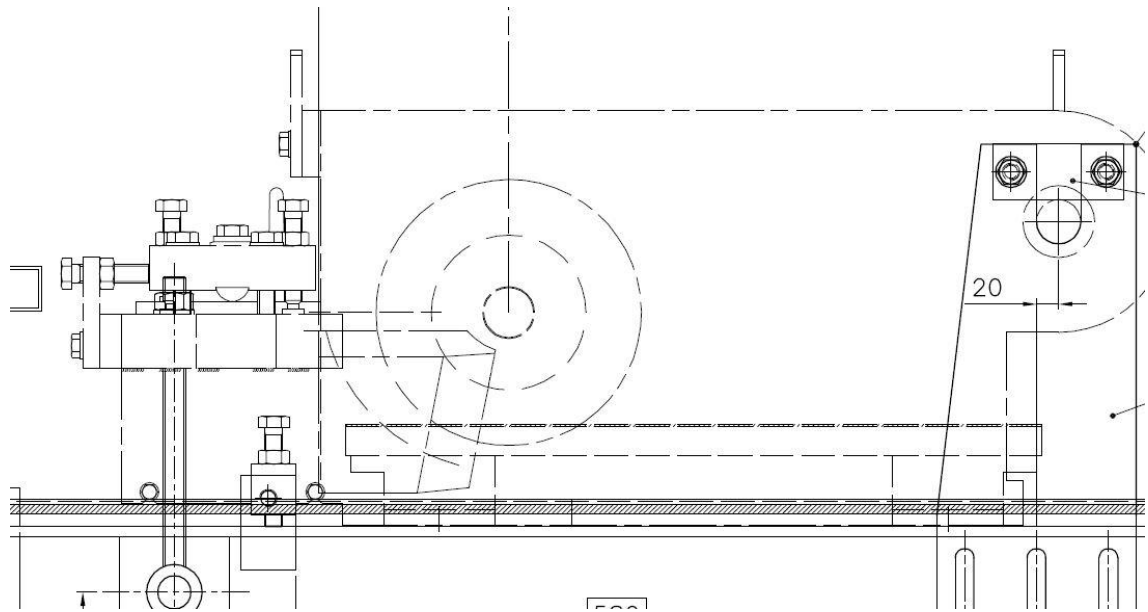


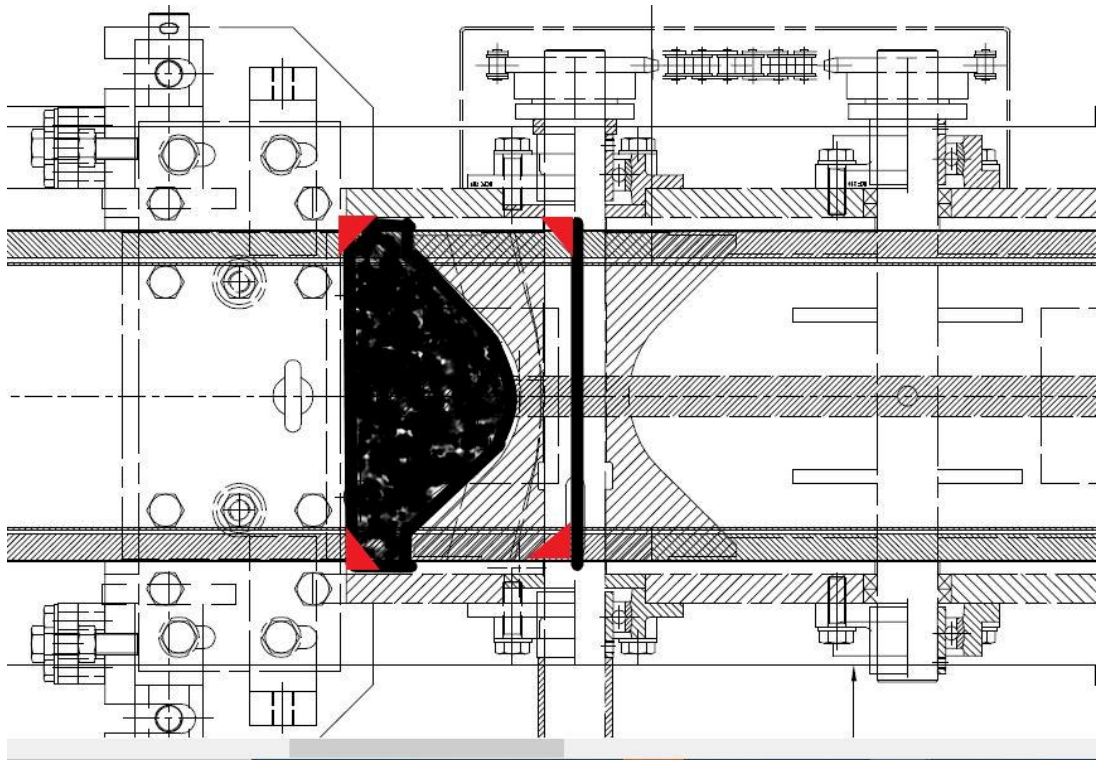


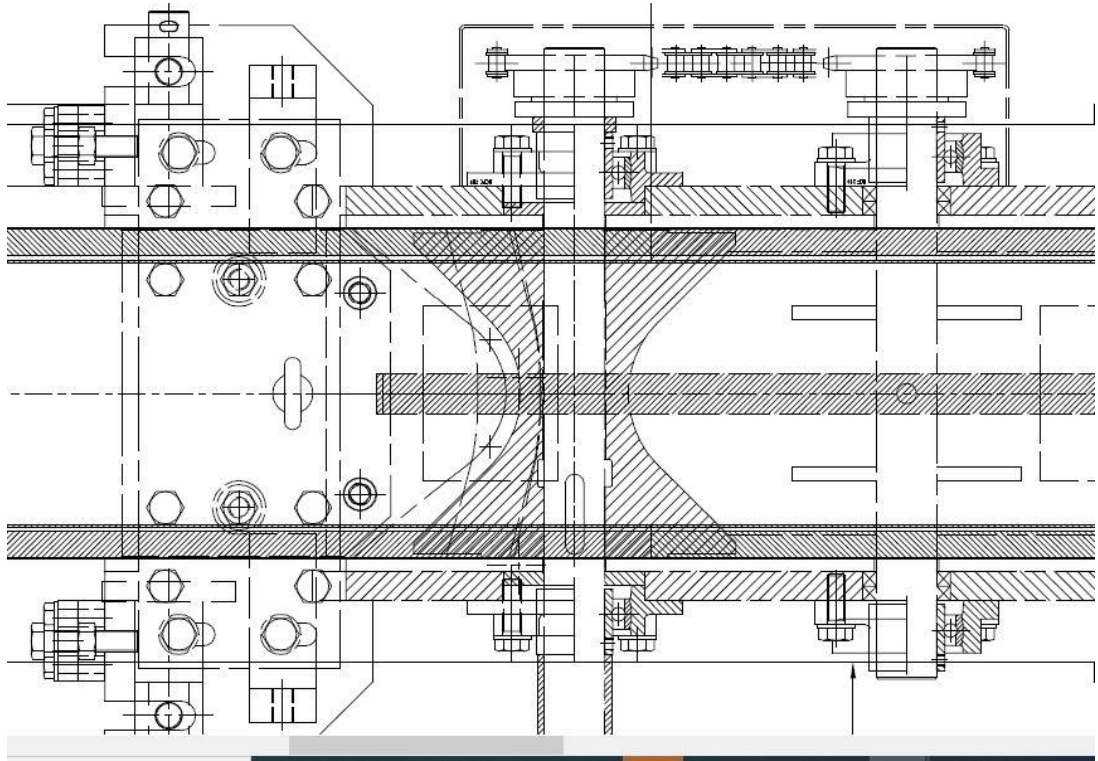

Test with the same pin stirrer, but think about a possible change in the distribution of the type of stirrer pin.

Depending on the concrete feed obtained on the pallet.



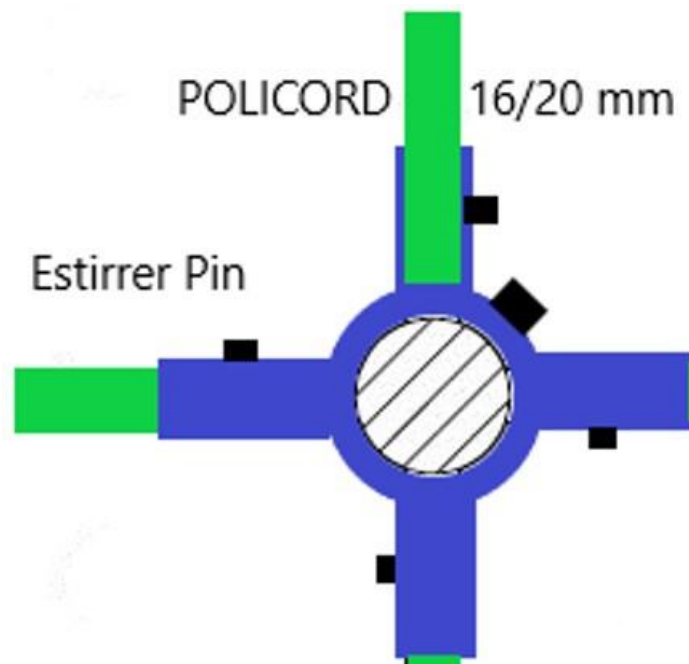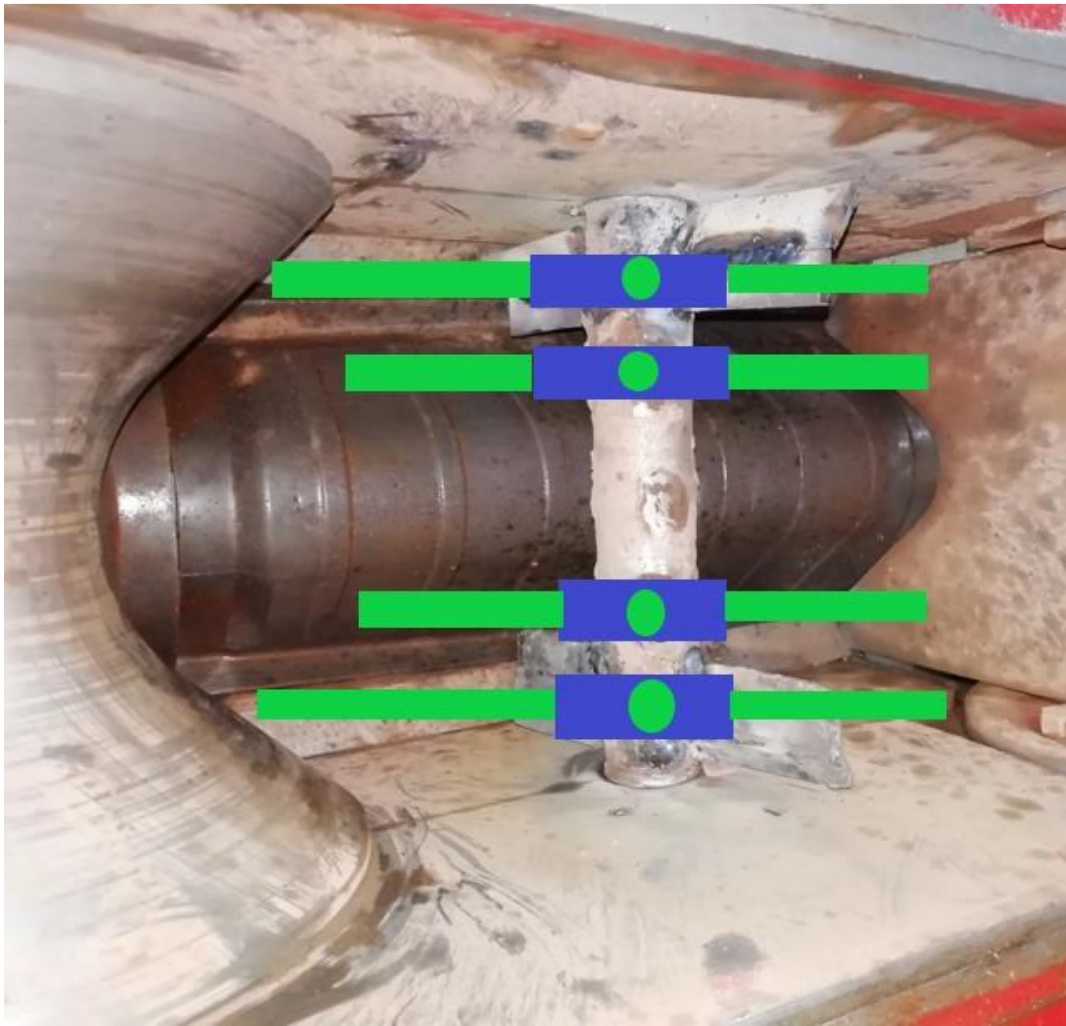

SETTING ROLLER AND SLIPPER POSSIBLE :

Check the current settings RIDGE TILE and carry out the tests with these settings, then, depending on the pressure, adjust to the possible values.

It is very important that the sides of the PALLET are “very clean”.

As reference , setting RIDGE TILE in Spain :

