

HOW TO SYNCHRONIZE THE PHASE POINT OF THE TILE CUTTING.171125

- a) Place the cutting system at the central point of its displacement.




- b) Place a mould by positioning with the pushing chain in “ the central area” (its cutting position), cutting blades perpendicular to the bedplate.





- c) Place the cam of the cutting carriage at the upper point **X** , adjust the arm of the cam for that distance with the cutting carriage.

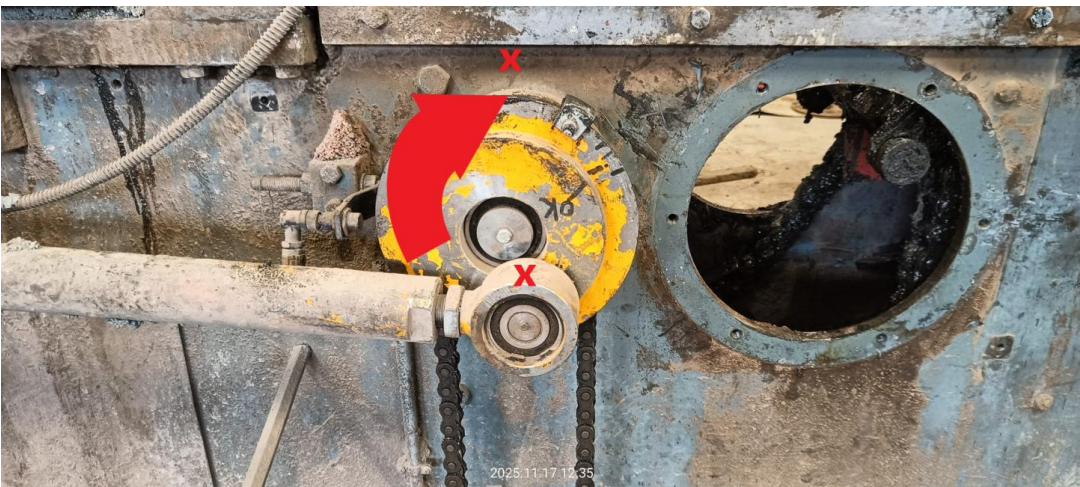

d) . Place and close the chain



e) Adjust the detector cam for the best possible tile cut

