

C.2.6. CHECKLIST - PALLET PUSHING SYSTEM TM-101

• Equipment: M.02540

• Frequency: Weekly

• Inspector: _____


• Date: // _____

Main Checklist Table:


Section	Item	Manual verification and condition assessment	Frequency	✓ Complies	✗ Fails	Observations/Measurement
C. CHECK	6	Anti -Lift Device molds	Weekly			
		Tactile check: (Must be clean)				
		Look for cracks, chips, or deformation.				
		Inspect the condition of : Deterioration the Duroglis guide for adjustment or replacement as needed.				
						DUROGLIS
						CYLINDER
						EV.CYLINDER
						SENSOR
						FC .MOLDS
						PRESSURE R.



Operation of the cylinder position sensor

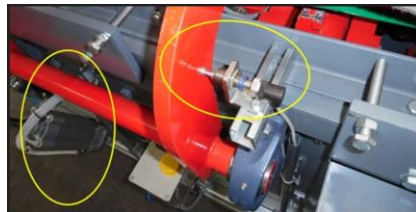

Operation of the F.C. position sensor

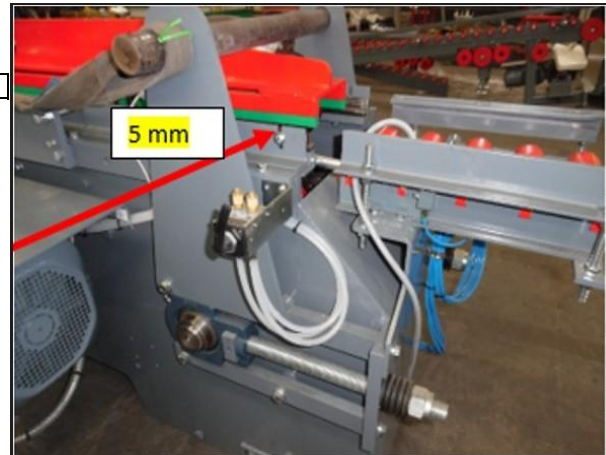

THE GAP BETWEEN THE ALUMINIUM PALLET FLOW AND THE POLIZENE NYLON BAR OF THE "CLOSING" DEVICE IS AROUND 5 mm ENTERING IN THE PUSHING SYSTEM.
THE GAP NEXT TO THE EXTRUSION BOX IS AROUND 1 mm.

Air leaks in :
Cylinder
Pneumatic hoses
Solenoid valve
Pressure regulator

Observations & Corrective Actions: