


ONUR KIREMIT

APPLICATOR PAINT.

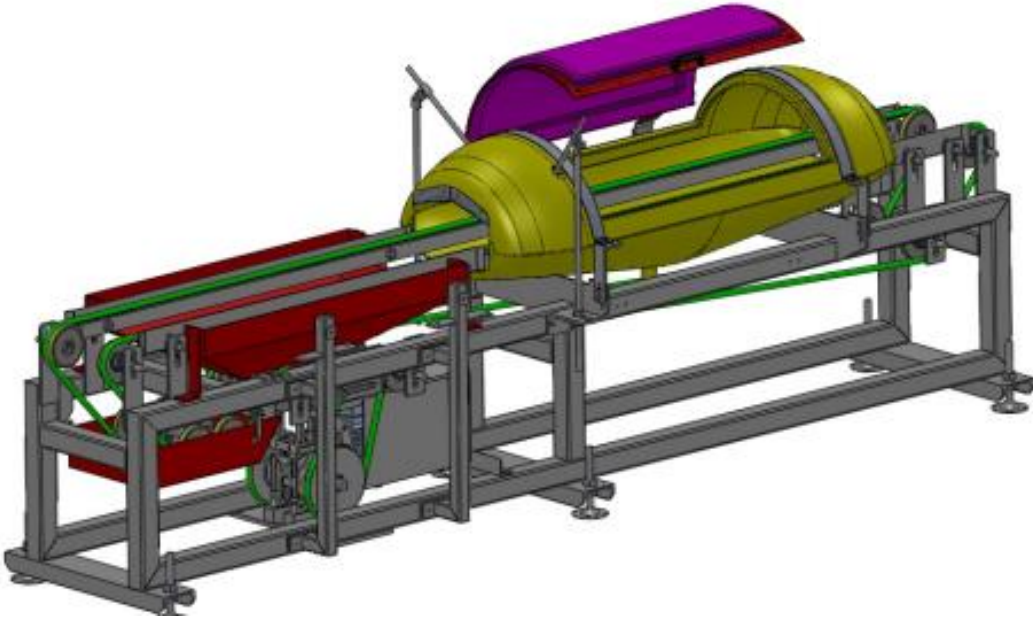

MAY 2023

APPLICATOR PAINT

The wet application of paint should improve its current application, the amount of 20 grams of paint with 50% or 25% solids should not affect the application of paint on the side of the pallets (interlocking side), on the front side or on the bottom side of the pallet as much



This paint contamination is transferred to the dirt in the corners of the Racker.





This subsequently impacts on the bases and sides of the rack corners, with the pallet adhering to the rack corner after curing.



In my opinion, the side, front and bottom application of the wet tile should be reduced:

- a) For the lateral application, change the position and the current angle of fixation of the paint gun, which affects this side or change to a "Low Pressure Paint application system with 2 perpendicular nozzles".
- b) For the front application, reduce the space between the moulds on the paint application conveyor (by reducing the speed of this conveyor, to avoid applying paint on the front of the lower part of the mould) and consider changing the inclination of the mould conveyor to raise it at the point of application of the tile.
- c) To reduce the lower contamination of the mould, the current conveyor would have to be shortened by 2 conveyors.

