



INSTRUMENTS AND ACCESSORIES FOR THICKNESS MEASUREMENT 051225

To perform thickness measurements on Wet Tiles, the following equipment is recommended:


- **A profile-adjusted cutting blade:** It must be precisely adapted to the tile's cross-section at the measurement point.

Typically, this cut is made between 60 and 100 mm from the tile's end, depending on the specific mould and profile.

For the **ROMAN TILE**, the recommended initial cutting position is **70 mm**, due to the stability of thicknesses in that section of the mould.

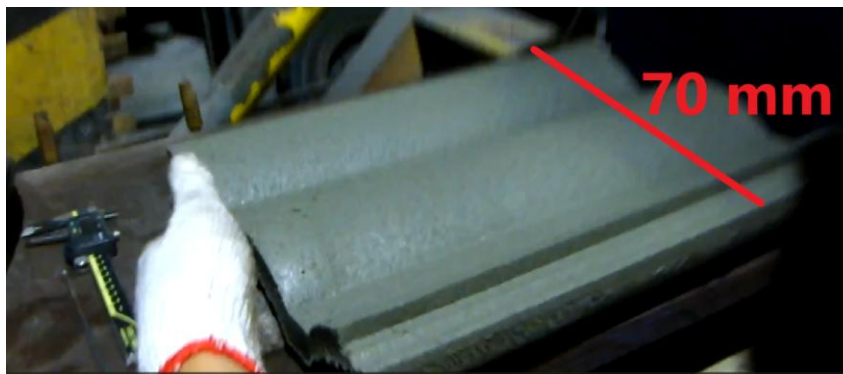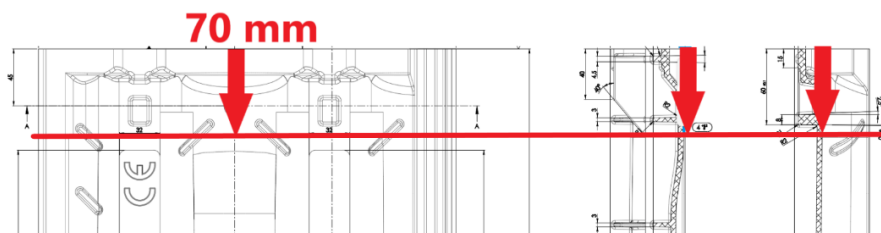

The blade should incorporate a **rubber reinforcement on its top part** to facilitate and stabilize the incision into the tile.

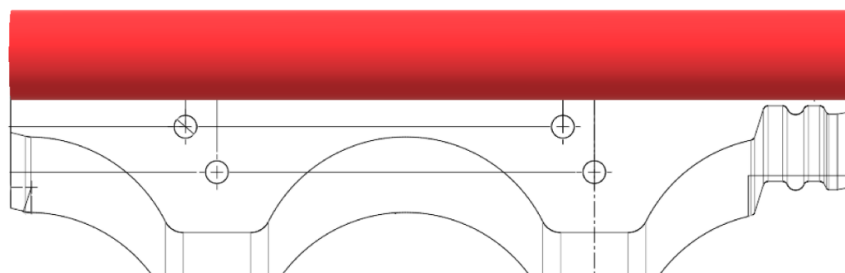

- **A precision caliper:** The use of a **Depth Gauge** is recommended, although a 150 mm **Vernier Caliper** (analog or digital) is also suitable.



- **Calibrated reference rods:**
 - A cylindrical steel rod, **10 mm in diameter and 200 mm in length.**
 - A square steel rod, **10 mm per side and 200 mm in length.**

