




HEATING SYSTEM FOR CURING -Relationship SOP

MACHINE TYPE:HT-108 SERIAL NUMBER :M.02228

FP McCANN (Cadeby)

ORDER : C22004

YEAR OF PRODUCTION 2023

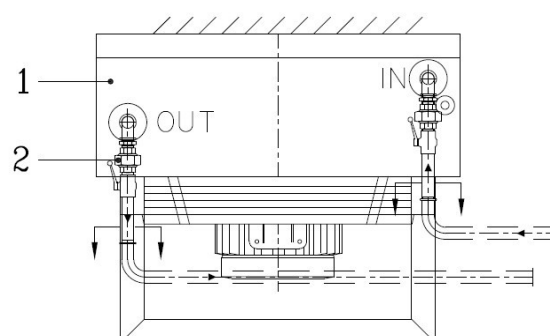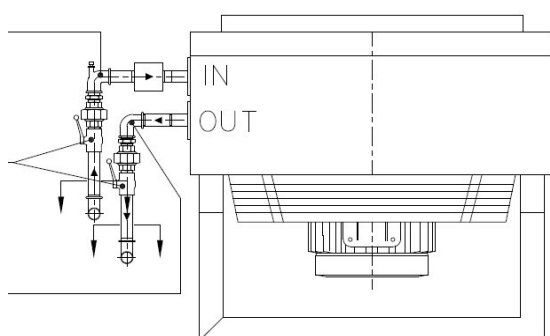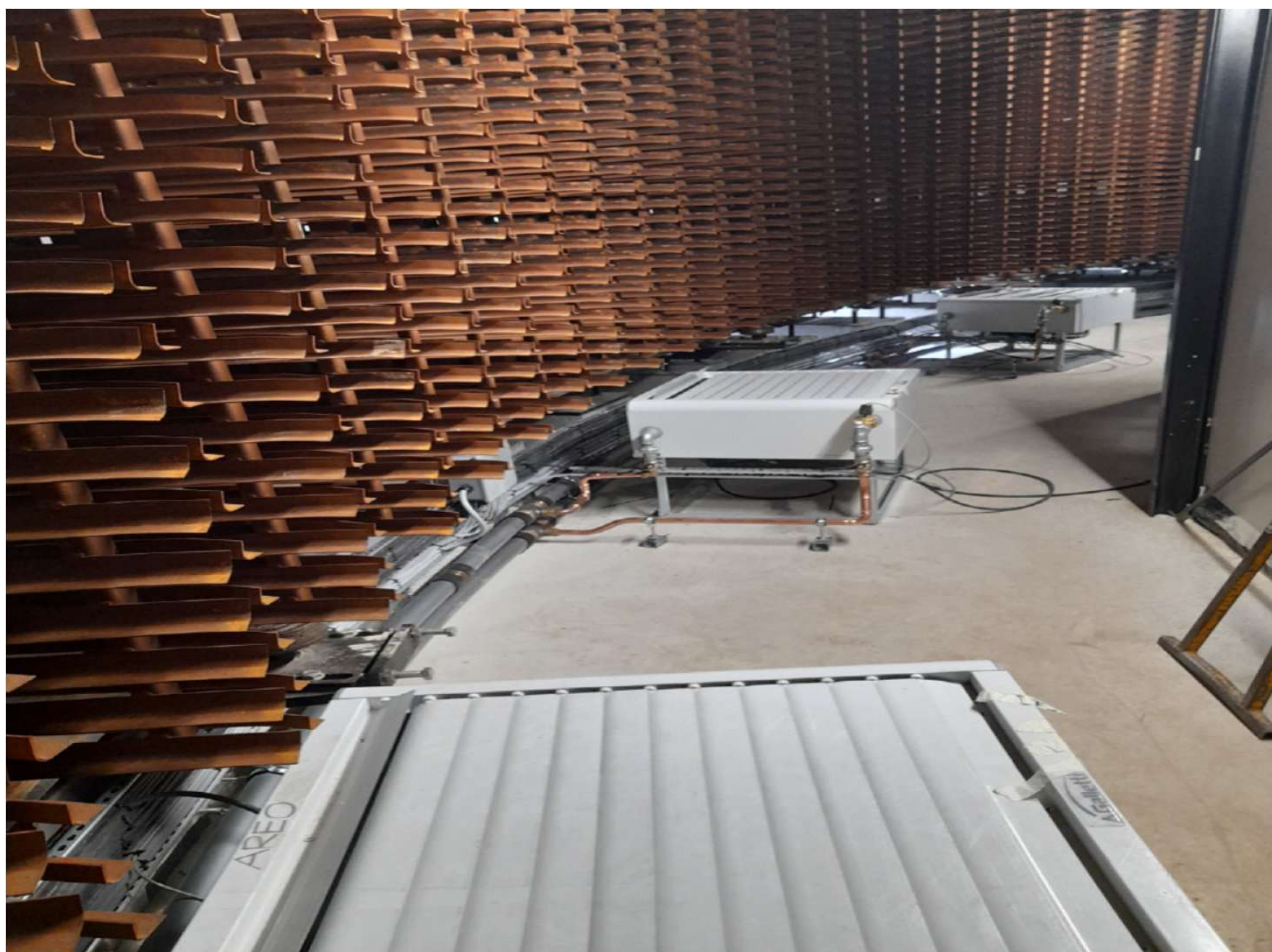

SOP M.02208.00 Contents List Heating System for Curing
SOP M.02208.01 Heating System for Curing.

VORTEX HYDRA	STANDARD OPERATING PROCEDURE	Code: SOP M.02228.01 Date: 15/12/25 Page: 2 de 2
HEATING SYSTEM FOR CURING		
MACHINE TYPE:HT-108 SERIAL NUMBER :M.02228		
Heating System for Curing		
	<u>General Description and Function</u>	
	*The 15 heat exchangers installed in the Curing Rotary are designed to heat the process air to a controlled temperature during the curing cycle. *Their design and operation ensure homogeneous thermal distribution throughout the chamber.	
	<u>Critical Points and Risk Management</u>	
	*Direct impact of hot airflow on tile surfaces must be prevented to preserve their surface integrity and ensure uniform curing throughout the thermal cycle.	
	<u>SUPERVISION LEVEL</u> <u>WEEKLY</u>	
	<u>Visual inspection:</u> *Check all connections, valves, and pipe sections for drips, moisture, or water-induced corrosion signs. *Verify there are no visible obstructions in the air diffusion grilles or louvers. <u>Acoustic Inspection:</u> *Perform active listening during operation to detect atypical sounds (vibrations, grinding, rattling, or whistling) that may indicate: - Fan imbalance. - Bearing wear. - Fan blade fouling.	
	<u>EVERY TWO MONTHS</u> 283637 AIR HEATER (15 units) 261273 Manual air realise valve (15 units) 18262 Ball valve 1" (30 units) 249538 Solenoid valve (15 units) <u>Functional check and cleaning.</u>	
	<u>Component Verification:</u> Check the operation and condition of the 15 air heaters, 30 ball valves, 15 solenoid valves, and 15 manual air release valves. <u>Component Cleaning:</u> *Clean the bodies and connections of these components to ensure proper operation.	
	<u>CLEANING</u> <u>EVERY TWO MONTHS</u>	
	<u>Cleaning Procedure:</u> <u>For exterior surfaces and adjustable louvers:</u> *Use a slightly damp cloth to wipe all accessible surfaces <u>For grilles:</u> *Use a compressed air gun at low pressure (< 3 bar) to remove accumulated dust and debris.	