




HEATING SYSTEM FOR CURING -Relationship SOP

MACHINE TYPE: HT-108 SERIAL NUMBER :M.02229


FP McCANN (Cadeby)

ORDER : C22004

YEAR OF PRODUCTION 2023

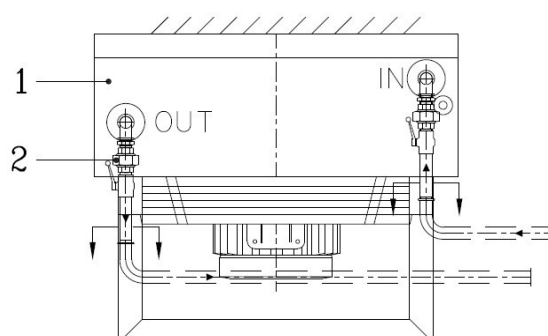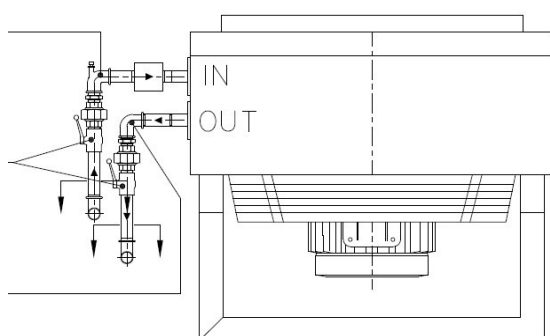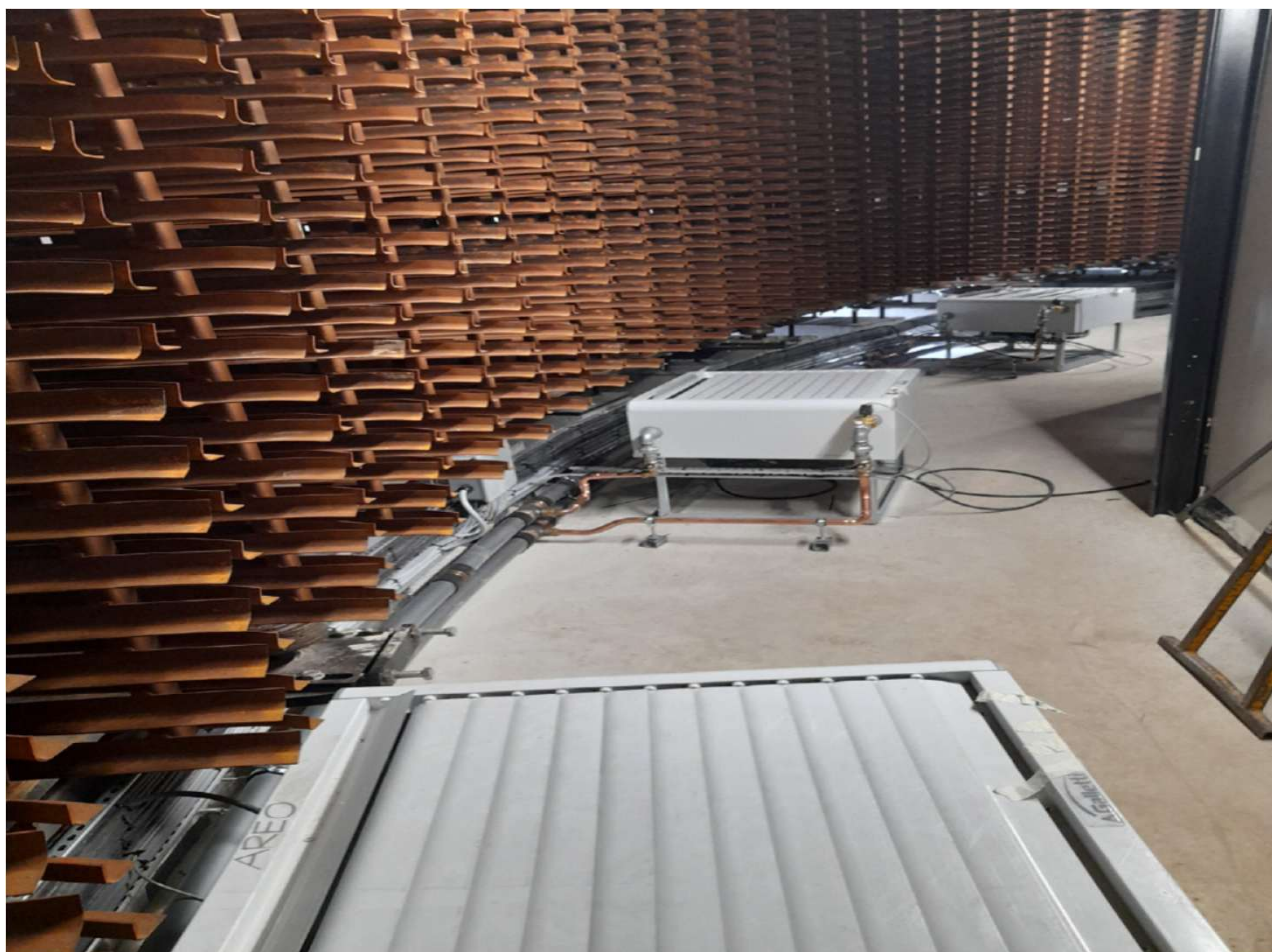

SOP M.02229.00 Contents List Heating System for Curing
SOP M.02229.01 Heating System for Curing.

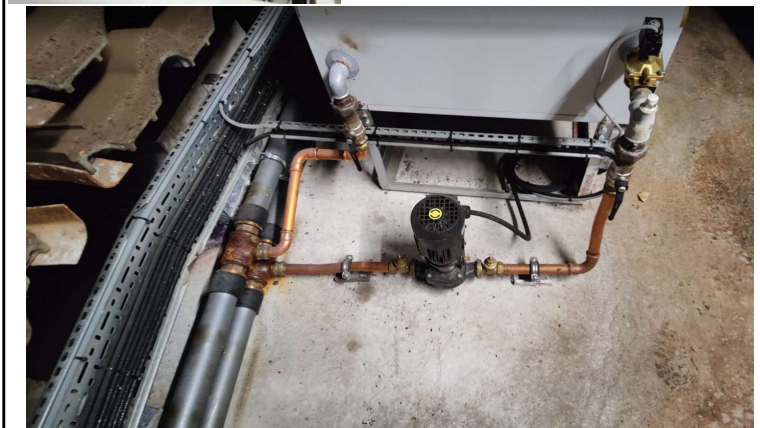VORTEX HYDRA	STANDARD OPERATING PROCEDURE	Code: SOP M.02229.01 Date: 15/12/25 Page: 2 de 2
HEATING SYSTEM FOR CURING		
MACHINE TYPE: HT-108 SERIAL NUMBER :M.02229		
Heating System for Curing		
		General Description and Function *The 15 heat exchangers installed in the Curing Rotary are designed to heat the process air to a controlled temperature during the curing cycle. *Their design and operation ensure homogeneous thermal distribution throughout the chamber. Critical Points and Risk Management *Direct impact of hot airflow on tile surfaces must be prevented to preserve their surface integrity and ensure uniform curing throughout the thermal cycle. SUPERVISION LEVEL WEEKLY Visual inspection: *Check all connections, valves, and pipe sections for drips, moisture, or water-induced corrosion signs. *Verify there are no visible obstructions in the air diffusion grilles or louvers. Acoustic Inspection: *Perform active listening during operation to detect atypical sounds (vibrations, grinding, rattling, or whistling) that may indicate: - Fan imbalance. - Bearing wear. - Fan blade fouling. EVERY TWO MONTHS 283637 AIR HEATER (15 units) 261273 Manual air release valve (15 units) 18262 Ball valve 1" (30 units) 249538 Solenoid valve (15 units) Functional check and cleaning. Component Verification: Check the operation and condition of the 15 air heaters, 30 ball valves, 15 solenoid valves, and 15 manual air release valves. Component Cleaning: *Clean the bodies and connections of these components to ensure proper operation.
		
		CLEANING EVERY TWO MONTHS Cleaning Procedure: For exterior surfaces and adjustable louvers: *Use a slightly damp cloth to wipe all accessible surfaces For grilles: *Use a compressed air gun at low pressure (< 3 bar) to remove accumulated dust and debris.