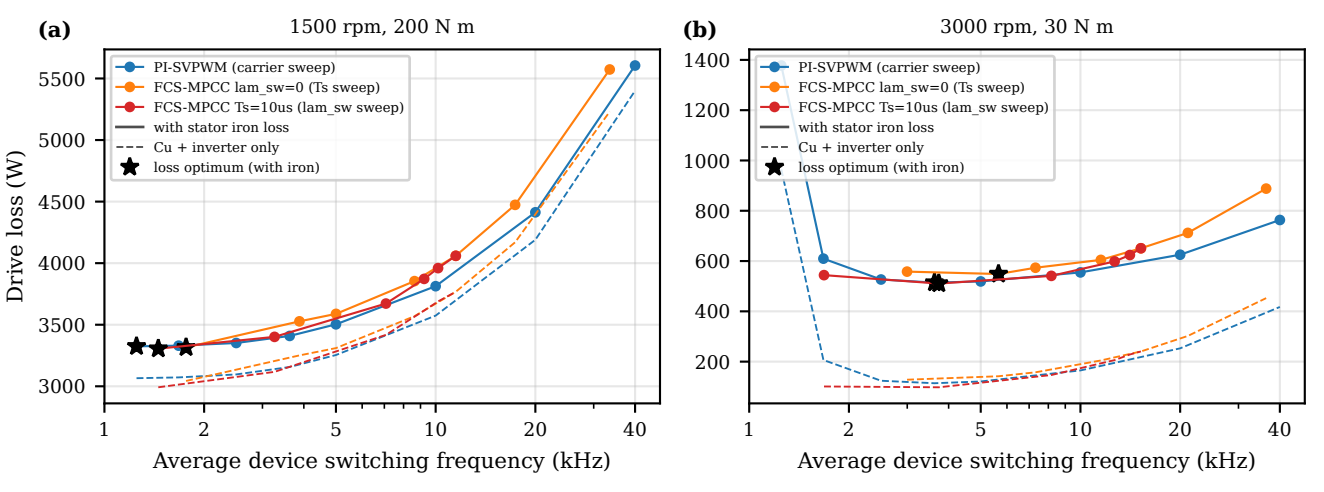
(a)
1500 rpm, 200 N m
PI-SVPWM (carrier sweep)
FCS-MPCC lam_sw=0 (Ts sweep)
FCS-MPCC Ts=10us (lam_sw sweep)
with stator iron loss
Cu + inverter only
loss optimum (with iron)
Drive loss (W)
Average device switching frequency (kHz)
(b)
3000 rpm, 30 N m
PI-SVPWM (carrier sweep)
FCS-MPCC lam_sw=0 (Ts sweep)
FCS-MPCC Ts=10us (lam_sw sweep)
with stator iron loss
Cu + inverter only
loss optimum (with iron)
Average device switching frequency (kHz)