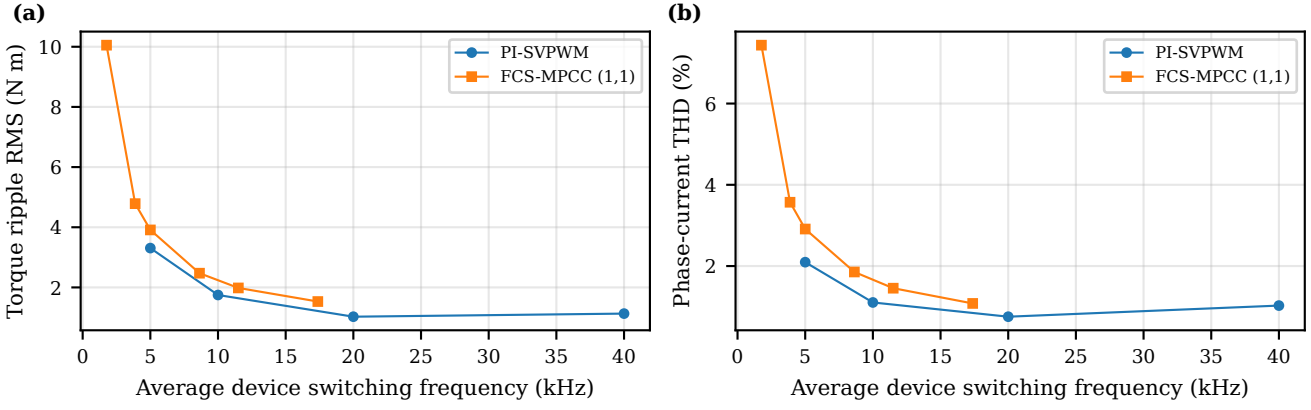
(a)
Torque ripple RMS (N m)
10
8
6
4
2
0
5
10
15
20
25
30
35
40
Average device switching frequency (kHz)
PI-SVPWM
FCS-MPCC (1,1)
(b)
Phase-current THD (%)
6
4
2
0
5
10
15
20
25
30
35
40
Average device switching frequency (kHz)
PI-SVPWM
FCS-MPCC (1,1)