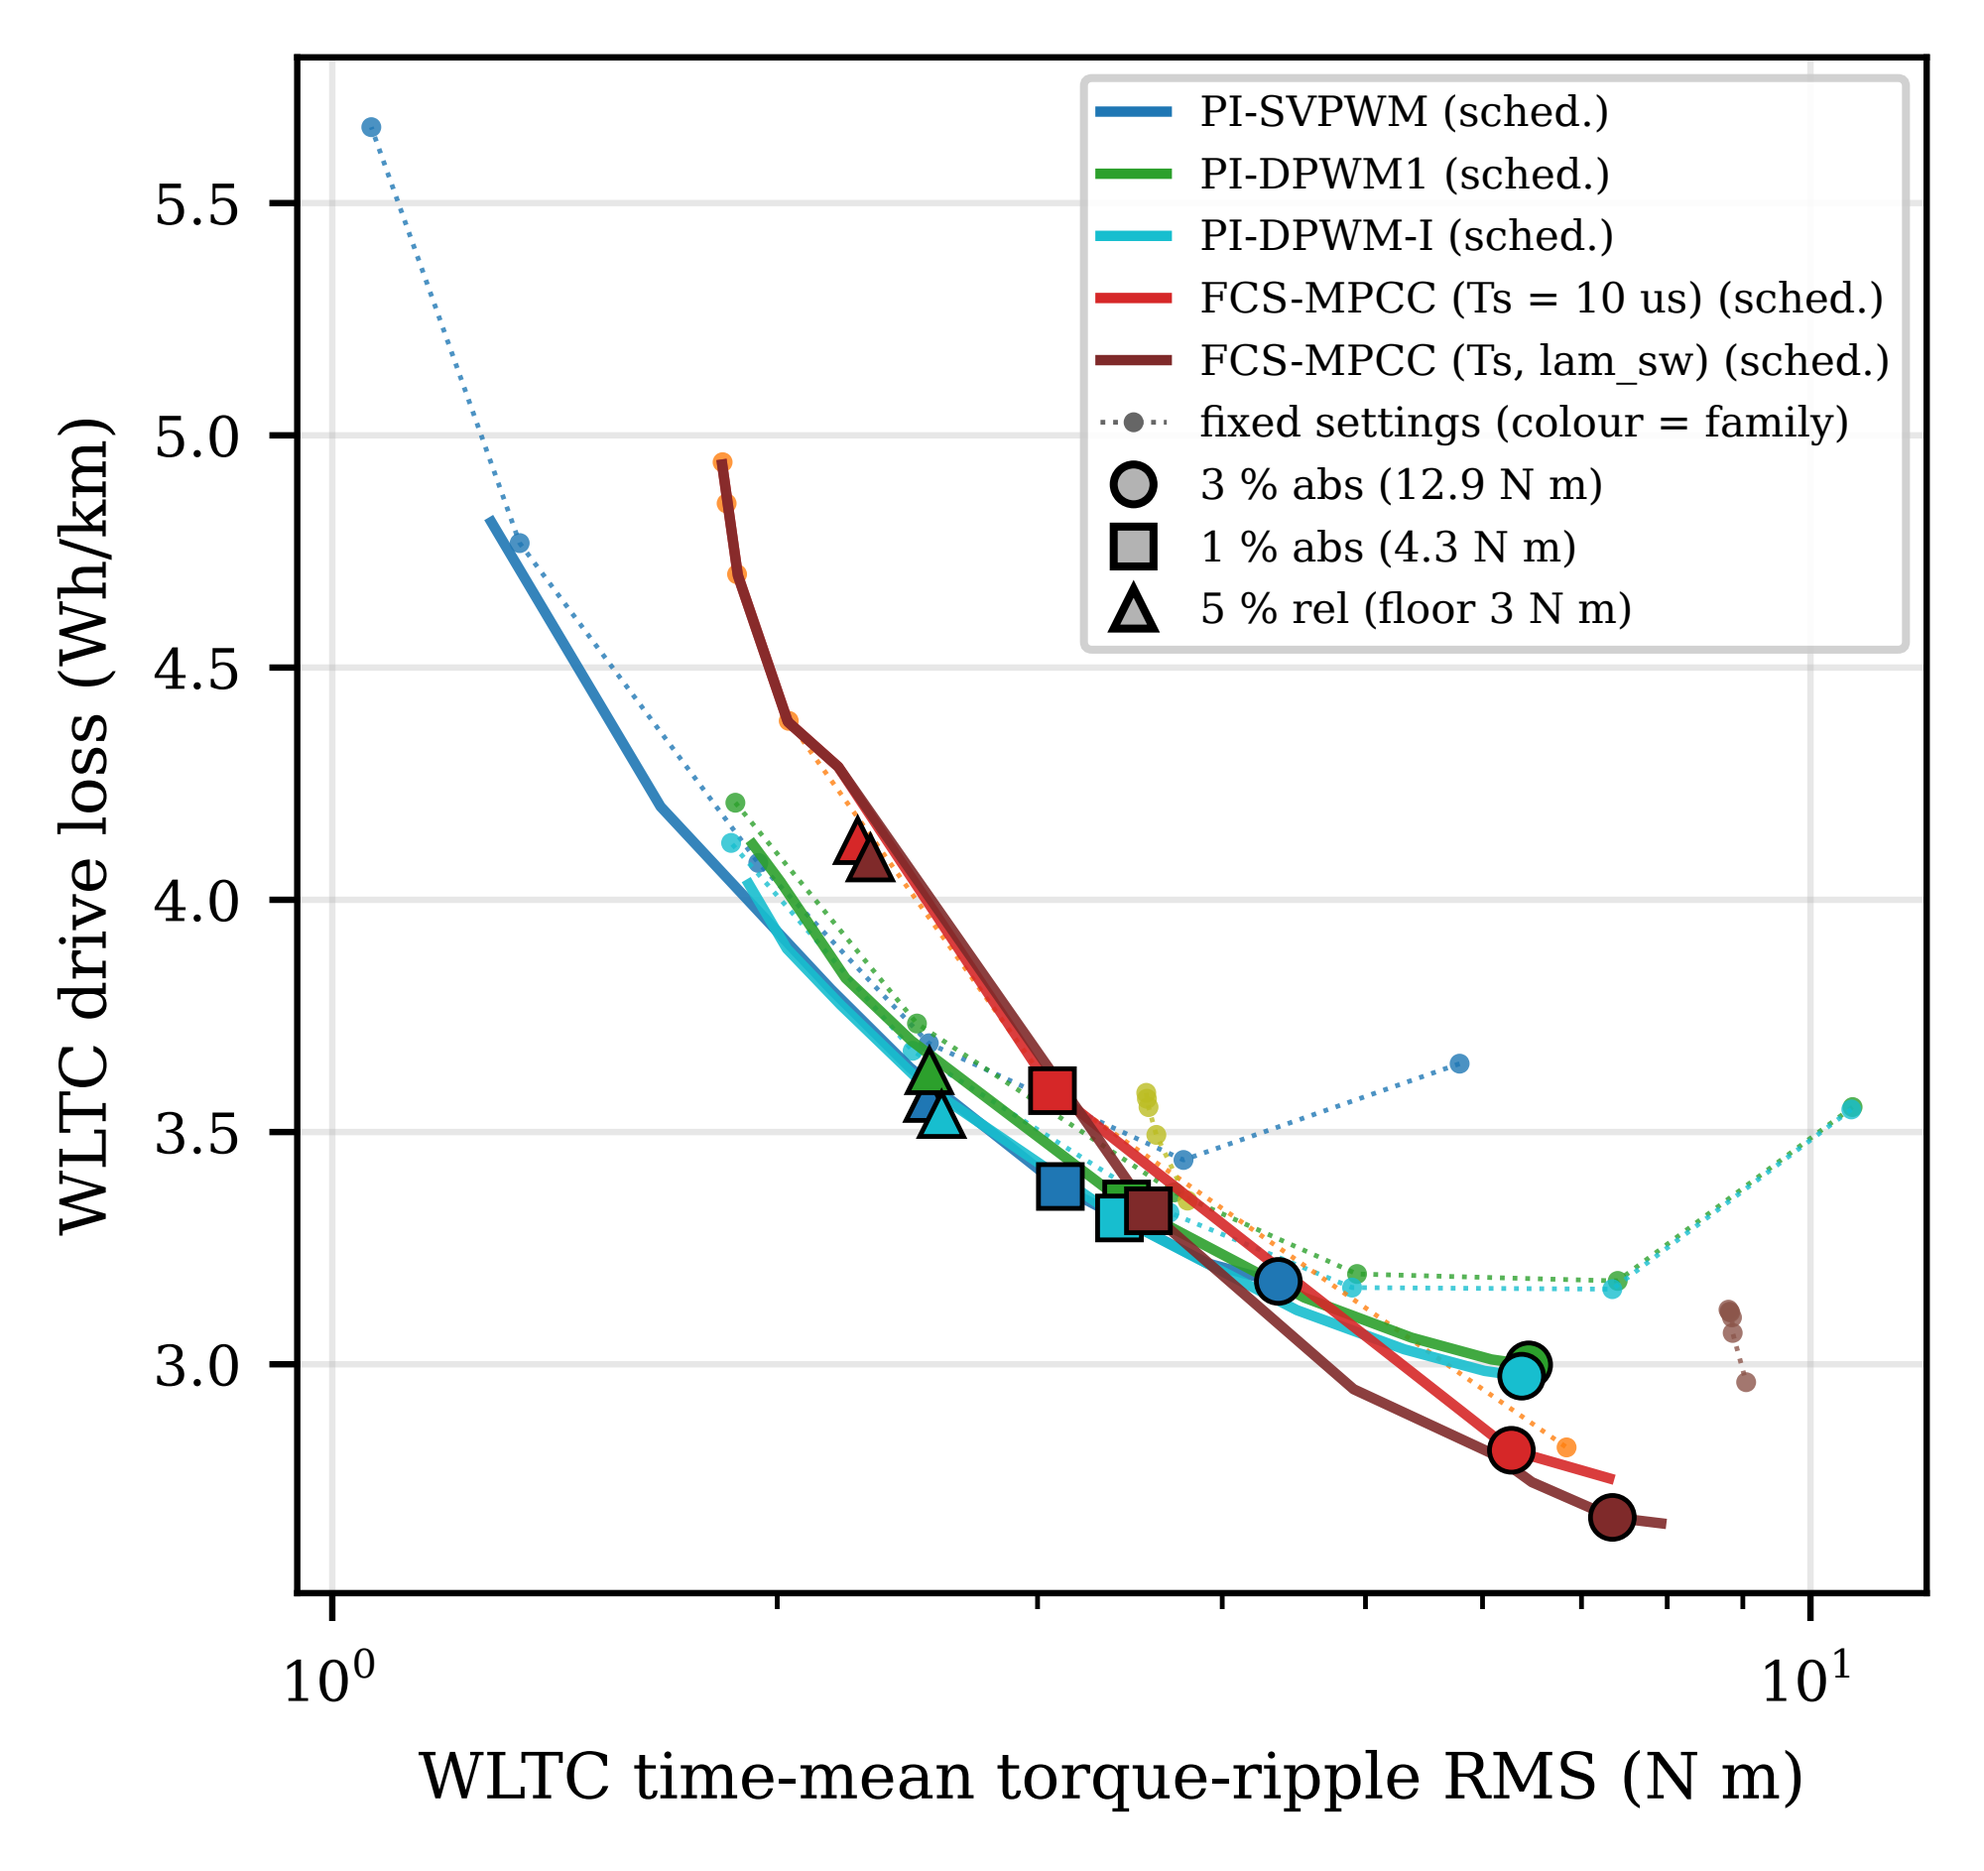
PI-SVPWM (sched.)
PI-DPWM1 (sched.)
PI-DPWM-I (sched.)
FCS-MPCC (Ts = 10 us) (sched.)
FCS-MPCC (Ts, lam_sw) (sched.)
fixed settings (colour = family)
3 % abs (12.9 N m)
1 % abs (4.3 N m)
5 % rel (floor 3 N m)
WLTC drive loss (Wh/km)
5.5
5.0
4.5
4.0
3.5
3.0
10^0
10^1
WLTC time-mean torque-ripple RMS (N m)