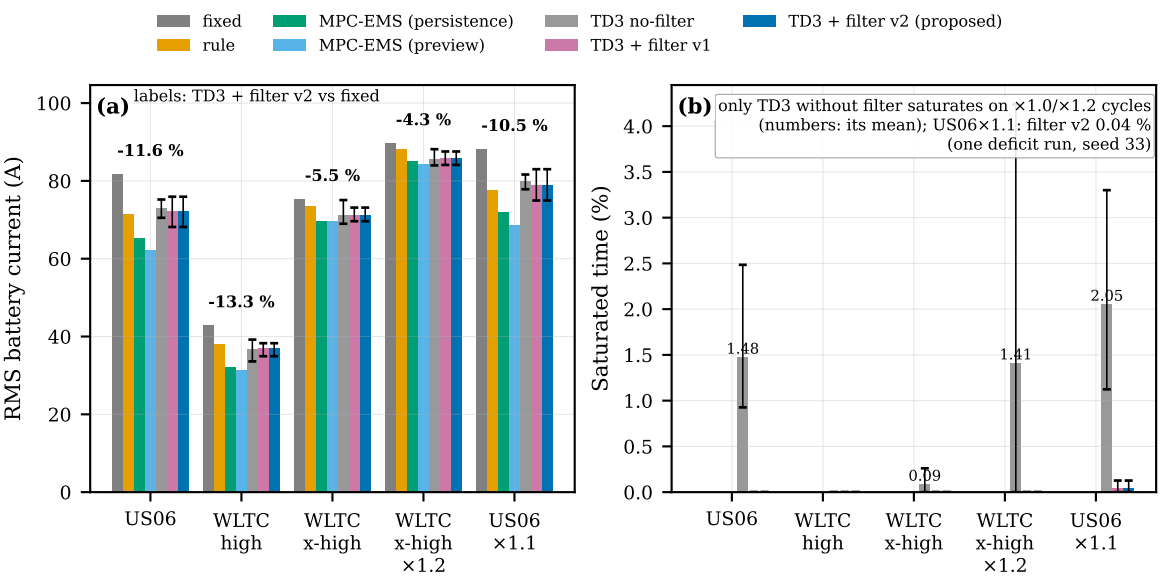
fixed
rule
MPC-EMS (persistence)
MPC-EMS (preview)
TD3 no-filter
TD3 + filter v1
TD3 + filter v2 (proposed)
(a)
labels: TD3 + filter v2 vs fixed
RMS battery current (A)
-11.6 %
-13.3 %
-5.5 %
-4.3 %
-10.5 %
US06
WLTC high
WLTC x-high
WLTC x-high ×1.2
US06 ×1.1
(b)
only TD3 without filter saturates on ×1.0/×1.2 cycles
(numbers: its mean); US06×1.1: filter v2 0.04 %
(one deficit run, seed 33)
Saturated time (%)
1.48
0.09
1.41
2.05