


Installation Instructions & Use Recommendations

FMS Accessories – FMS Power Timer

These instructions must be read carefully and thoroughly **before** beginning work. FMS Solutions, LLC accepts no liability for damage caused by failure to observe the installation instructions or use recommendations.

Installation of this accessory does not change the factory specified load limits for the motorcycle.

See Cautions on page 2.

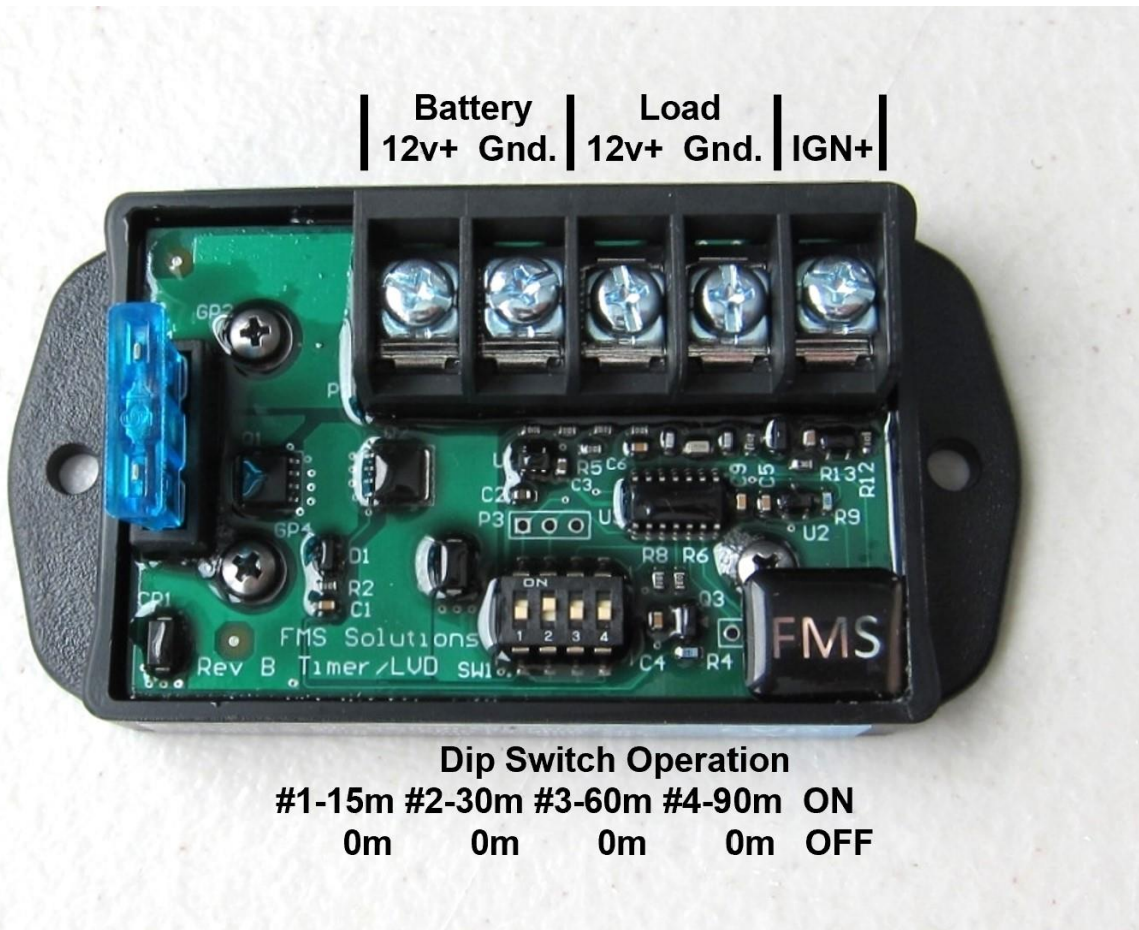

The FMS Timer is designed to provide power to accessories such as radio equipment, computers or other accessories that require power during and after the ignition is turned OFF. The timer is activated when the ignition is turned ON and has the following features:

1. Direct connection to the motorcycle battery, with minimal parasitic load (less than 50 μ A) when OFF, so the battery will not discharge noticeably when parked.
2. Selectable timer in 15-minute increments. Activate any or all of the DIP switches to total the amount of time you wish the FMS Timer to stay ON after ignition OFF.
Example: #1 + #2 = 45 minutes after ignition OFF
3. Low voltage protection to save battery from severe discharge. The timer is programmed to shut down at 9v regardless of remaining time, so that battery is not deep discharged which can otherwise permanently damage the battery. Later versions of the FMS Timer will have DIP switch #4 selectable for either 9v or 11v. 9v for auxiliary batteries, 11v for primary batteries where MC restarting is required.
4. The battery power line is fused directly and can be fused up to a maximum of 20A.
5. The timer can be secured with screws through the holes provided, or by using high quality Velcro.

The FMS Timer is available with pre-installed specific wiring harnesses to provide a plug & play installation for users.

If you don't see your application on the list, just request a quote for a custom-made harness with the connectors of your choice.

Specifications:

Maximum Load / Fuse Rating: 20A

Parasitic Load: <50 μ A

Low Voltage Limit: V2 = 9v; V3 = 9v or 11v (selectable)

Timer Duration: V2 = 15-minute increments to 3.25 hours

V3 = 15-minute increments to 1.75 hours



Cautions:

- As with all wiring, ensure that wires flow freely with no contact with sharp objects / edges.
- Secure all wiring with cable ties, but never over-tighten cable ties. Cable ties are designed to keep the wiring in location only.
- Keep power wires separated from antenna cables or other communication cables / wires. Never cable tie them together.
- Watch that no screws or fasteners protrude onto the FMS Power Timer, the fuse, or any wiring.
- Ensure that there is sufficient clearance between the top of the fuse and any other object / casing to avoid contact. 1.5" of vertical clearance for the timer is the minimum recommended.

Feedback: Thank you for your purchase and we welcome your feedback as we too want to make every accessory exceed your expectations. Report any comments, suggestions, problems or concerns to FMS Solutions, LLC at info@fmsaccessories.com.

FMS Solutions, LLC Limited Warranty

FMS Solutions, LLC warrants to the first retail purchaser of new FMS Accessory products, to be free from defects in materials or workmanship, for a period of three (3) years from the original date of purchase as noted on the FMS Solutions, LLC invoice or original dealer invoice, except for paint and powder-coated finishes, which are warranted for the first 12 months only. LED lights from Fenix, Inc., Code 3, Inc. and Littlite are covered for 5 years by their manufacturer's respective warranties – processed through FMS Solutions, LLC.

This warranty extends only to the FMS accessory and does not include: damage caused by accidents or abuse; incorrect installation; labor to diagnose, remove, repair or replace; any consequential damage or loss of use. Any FMS Accessory suspected of being defective should be returned to FMS Solutions, LLC along with a copy of proof of purchase and warranty request form available on the FMS website. FMS Solutions, LLC will determine if the FMS accessory has a warrantable defect, and if so, will repair or replace the item and return it to the sender without charge. The decision to repair or replace said item is solely the prerogative of FMS Solutions, LLC.

Note: Police motors can operate in a very rough environment since police motors are a "tool". They can be dropped, knocked-over, etc. without concern as the officer has a job to do and determines what is necessary at any given moment. Warranty is for defects in materials or workmanship. Therefore, the ability of an item to become broken or damaged does not mean it is warranty ... it just means it is broken or damaged and in need of repair or replacement. No manufacturer warrants their products to be indestructible. Any questions should be directed to info@fmsaccessories.com.