

Device

×

Select the family and device you want to target for compilation.
You can install additional device support with the Install Devices command on the Tools menu.

Device family

Family: Cyclone V (E/GX/GT/SX/SE/ST)

Devices: All

Target device

☐ Auto device selected by the Fitter

☒ Specific device selected in 'Available devices' list

☐ Other: n/a

Show in 'Available devices' list

Package: FBGA

Pin count: Any

Speed grade: Any

Name filter:

☒ Show advanced devices ☐ HardCopy compatible only

Device and Pin Options...

Available devices:

Name	Core Voltage	ALMs	User I/Os	GXB Channel PMA	GXB Channel PCS	PCIe (PIPE)
5CSXFC5D6F31C7 (Advanced)	1.1V	32070	499	9	9	2
5CSXFC5D6F31C8 (Advanced)	1.1V	32070	499	9	9	2
5CSXFC5D6F31I7 (Advanced)	1.1V	32070	499	9	9	2
5CSXFC6D6F31C6 (Advanced)	1.1V	41910	499	9	9	2
5CSXFC6D6F31C7 (Advanced)	1.1V	41910	499	9	9	2
5CSXFC6D6F31C8 (Advanced)	1.1V	41910	499	9	9	2
5CSXFC6D6F31C8ES	1.1V	41910	499	9	9	2

Migration compatibility

Migration Devices...

0 migration devices selected

Companion device

HardCopy:

☒ Limit DSP & RAM to HardCopy device resources

Buy Software

OK

Cancel

Help

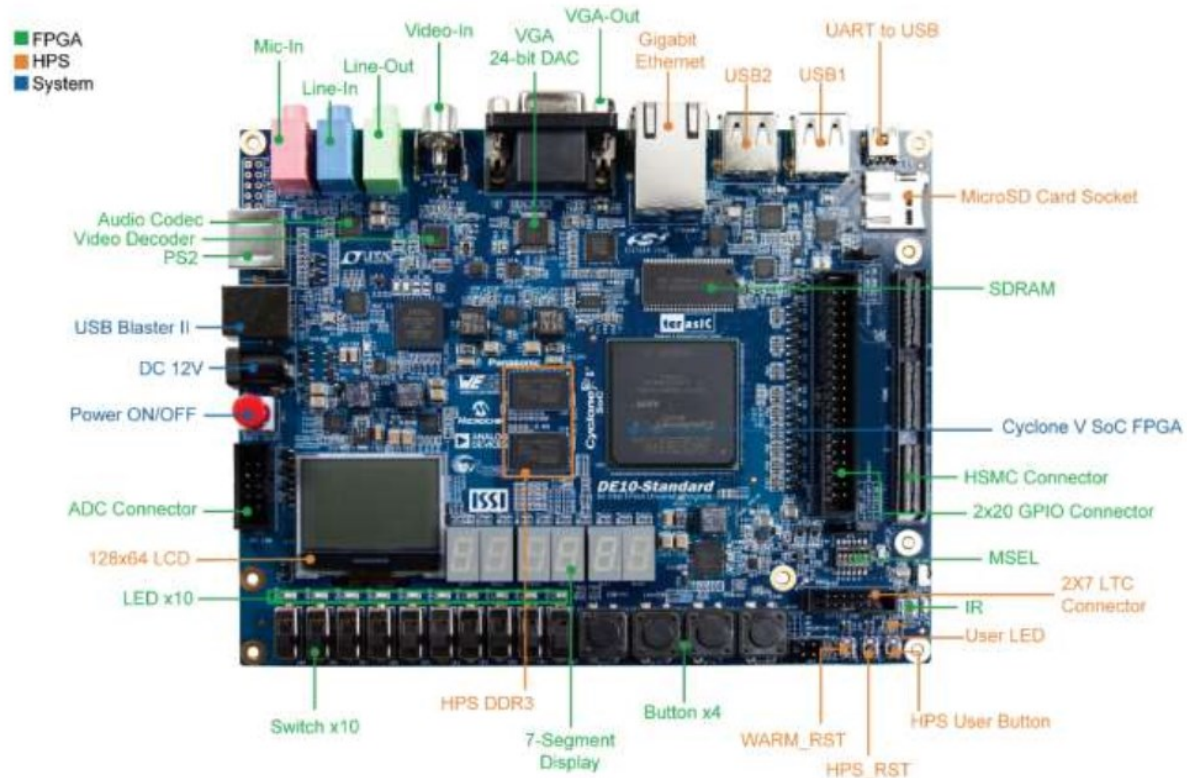


Figure 2-1 DE10-Standard development board (top view)

FPGA

- Intel Cyclone® V SE 5CSXFC6D6F31C6N device
- Serial configuration device – EPCS128
- USB-Blaster II onboard for programming; JTAG Mode
- 64MB SDRAM (16-bit data bus)
- 4 push-buttons
- 10 slide switches
- 10 red user LEDs
- Six 7-segment displays
- Four 50MHz clock sources from the clock generator
- 24-bit CD-quality audio CODEC with line-in, line-out, and microphone-in jacks
- VGA DAC (8-bit high-speed triple DACs) with VGA-out connector
- TV decoder (NTSC/PAL/SECAM) and TV-in connector
- PS/2 mouse/keyboard connector
- IR receiver and IR emitter
- One HSMC with Configurable I/O standard 1.5/1.8/2.5/3.3
- One 40-pin expansion header with diode protection
- A/D converter, 4-pin SPI interface with FPGA