



--- 8-Hz target Conditional routing Continuous reference

(a) End-to-end throughput

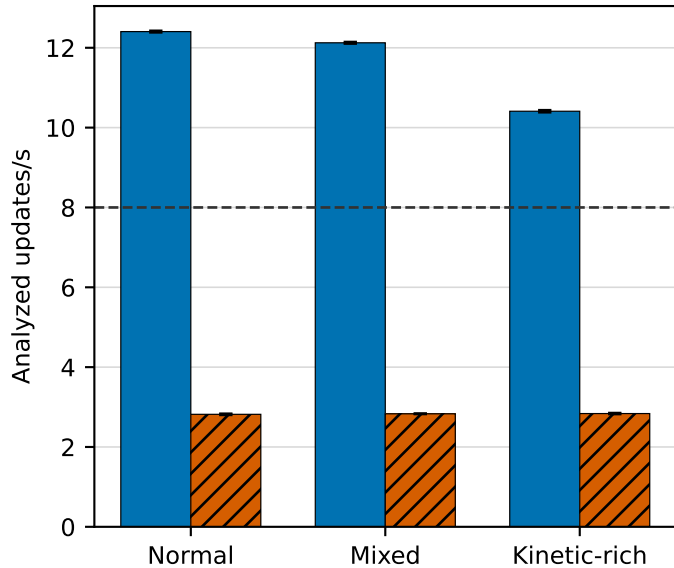

(b) Updates over 125 ms

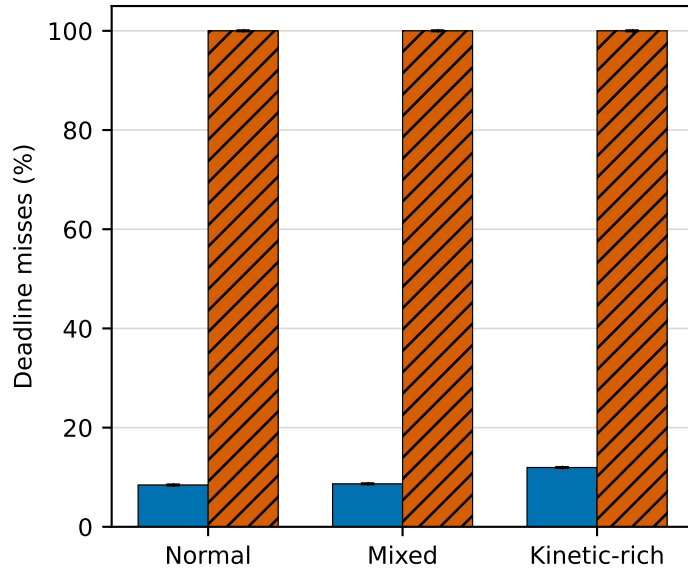

(c) Temporal-classifier schedule

