END A - 2x4 housing, mating face view (looking into the cavities)

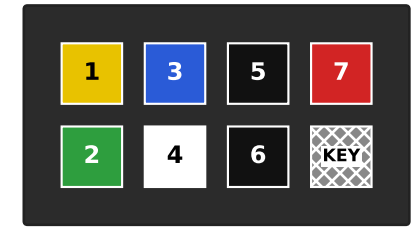

Cavity 8: NO contact, blocked with a polarizing key plug.

END B - stripped and tinned

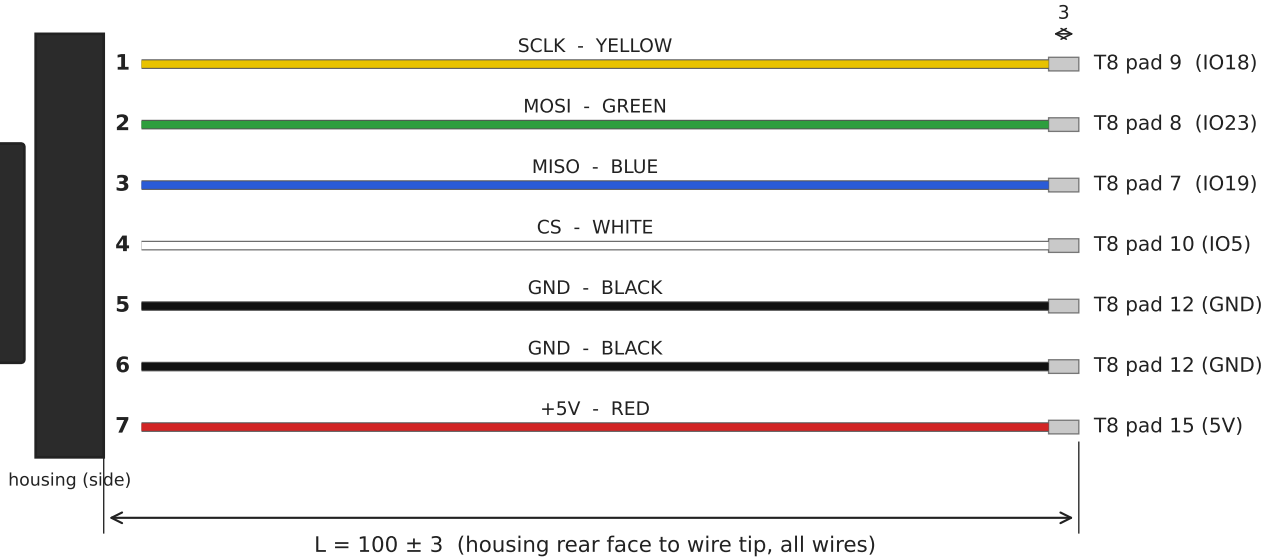

PIN-OUT

Cav.	Signal	Colour	End B (soldered by customer)	Connects to (customer side)
1	SCLK	YELLOW	T8 pad 9 (IO18)	QMTECH U2 pin 57
2	MOSI	GREEN	T8 pad 8 (IO23)	QMTECH U2 pin 58
3	MISO	BLUE	T8 pad 7 (IO19)	QMTECH U2 pin 59
4	CS	WHITE	T8 pad 10 (IO5)	QMTECH U2 pin 60
5	GND	BLACK	T8 pad 12 (GND)	QMTECH U2 pin 61
6	GND	BLACK	T8 pad 12 (GND)	QMTECH U2 pin 62
7	+5V	RED	T8 pad 15 (5V)	QMTECH U2 pin 63
8	-	-	no wire, KEY	QMTECH U2 pin 64

NOTES

1. Housing: 2x4 position, 2.54 mm pitch, female crimp housing (DuPont / TJC8-254 style). Equivalent parts acceptable.
2. Contacts: matching female crimp terminals, tin or gold plated, 7 pcs. Cavity 8 empty and blocked (polarizing key).
3. Wire: 26 AWG stranded, UL1007 or silicone, colours as table.
4. Length 100 ± 3 mm, measured from housing rear face.
5. End B: strip 3 mm, tin all 7 leads. No terminal.
6. Loose bundle; spiral twist ~1 turn / 20 mm if offered.
7. 100 % continuity test; no shorts between wires.
8. Pack each harness separately.

ESP32 LINK HARNESS (fpga-console)

7 wires, 2x4 2.54 mm crimp housing to tinned leads

Rev A 2026-10-05 Qty 5 pcs Units: mm

Drawn for LCSC Cable custom assembly