




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR12/18	L.CHAN

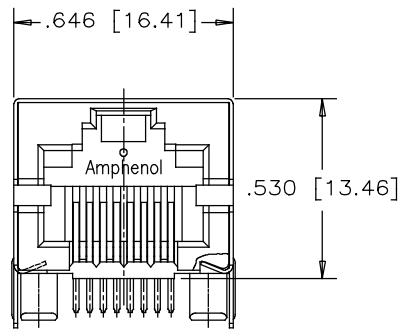

FRONT VIEW

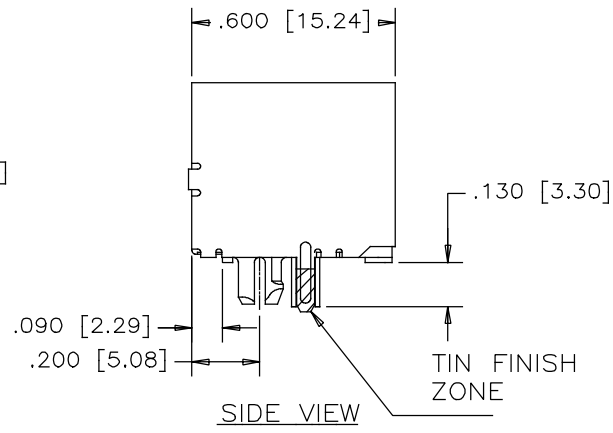

SIDE VIEW

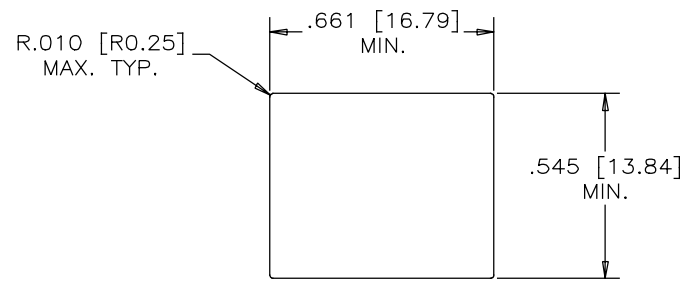

RECOMMENDED PANEL CUTOUT

**MATERIALS:**  
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0


**CONTACTS:** PHOSPHOR BRONZE  
 PLATING: GOLD PLATING ON MATING SURFACE.  
 [SEE PART NUMBER FOR THICKNESS]  
 50 μ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS]  
 MIN. MATTE TIN ON CONTACT TAILS.

**SHIELD:** STAINLESS STEEL WITH TIN FINISH ON SOLDER TAIL

**PART NUMBER:** RJHSE-XE80-A1

**GOLD PLATING**

E=RJ45 FLAT CONTACT 6u"  
 G=RJ45 FLAT CONTACT 15u"  
 J=RJ45 FLAT CONTACT 30u"  
 5=RJ45 FLAT CONTACT 50u"

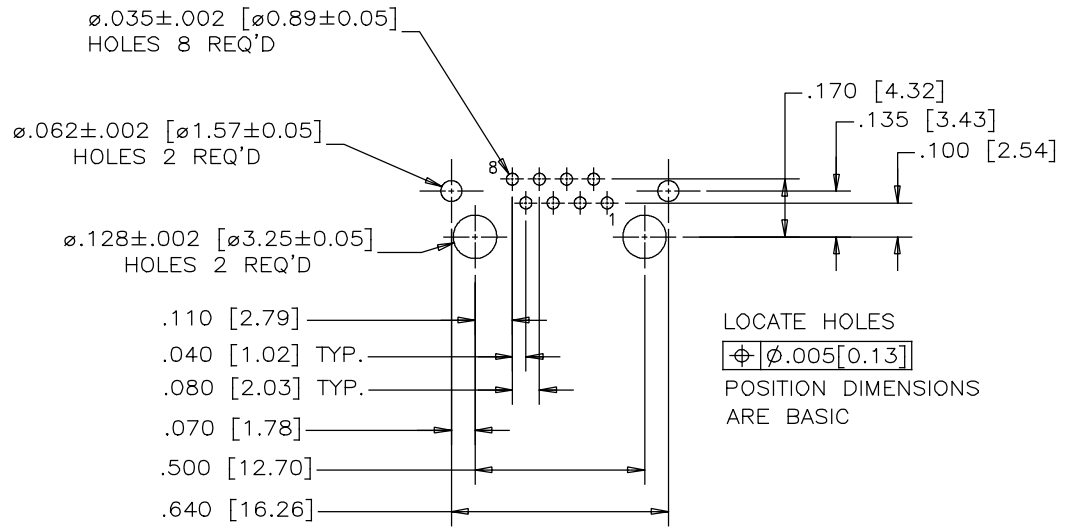

RECOMMENDED P.C.B. LAYOUT  
 (COMPONENT SIDE OF BOARD)

LOCATE HOLES  
 $\phi \phi.005 [0.13]$   
 POSITION DIMENSIONS  
 ARE BASIC

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU		DATE	MAR12/18		Amphenol Canada Corp. www.amphenolcanada.com			
PRIMARY UNITS INCH		CHECKED	L.CHAN		DATE	MAR12/18					
SECONDARY MILLIMETER		M.E. APP'D				TITLE HIGH SPEED RJ45 SINGLE-PORT CONNECTOR, WITHOUT LED, SHIELD (OPEN FRONT, WITHOUT TABS) .130" LONG CONTACT TAILS- RoHS COMPLIANT					
REFERENCE IN PARENTHESES		Q.A. APP'D									
GENERAL TOLERANCES		DWG APPR.				DWG. NO.  P-RJHSE-XE80-A1					
1 DECIMAL PLACE ±0.025		ENG. REL. NO.									
2 DECIMAL PLACES ±0.020		REF.				CODE ID NO. 03554   DWG SIZE: C   SCALE: N/A   SHEET 1 OF 1					
3 DECIMAL PLACES ±0.015		THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING							
ANGULAR DEGREES ±1.0°											
E		F		G		H					