SPEC

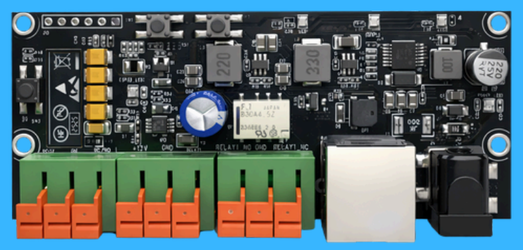

Architecture: Edge AI access controller
Design: Modular (Reader + Mainboard separated)
Deployment: Plug & Play
Installation: Wall-mounted / Surface-mounted

Authentication Methods

Mobile Wallet Credential (Cellbedell Vkey)
NFC (ISO14443 Type 2)
QR Code (optional module)
BLE (Vkey app required)
Biometric integration ready (future expansion)

I/O Interface (Mainboard)

Relay Output: 1–2 channel
Digital Input: Door sensor / Exit button

Power

Input Voltage: DC 12V
Power Consumption: 2A
Protection: Over-current / Reverse polarity

Communication

PoE interface/BLE/NFC/MQTT protocol support/ HTTPS RESTful API/AWS/Google Cloud

Appearance

Reader: Industrial-grade ABS/LED status indicator/Buzzer feedback
Mainboard: Industrial PCB