


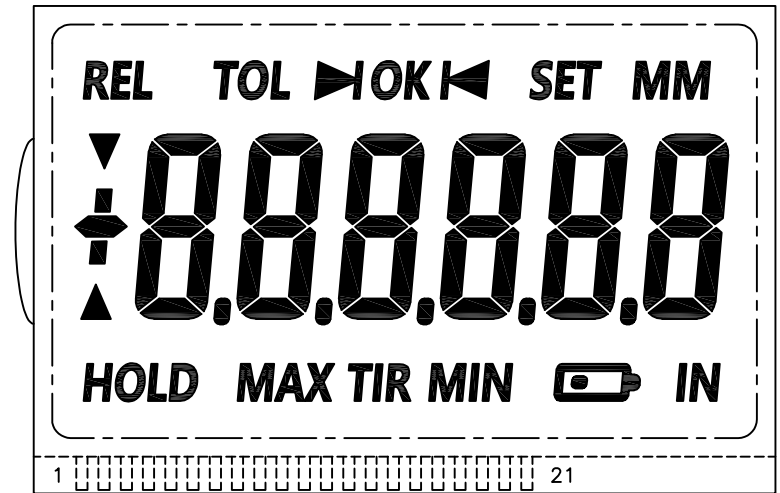

显示效果图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
COM1	COM1	--	--	--	'hold'	'fwd'	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	--	'ok'	'tol dn'
COM2	--	COM2	--	--	'max'	'sign'	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	--	'tol up'	'tol'
COM3	--	--	COM3	--	TIR	'Positive'	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	--	'set'	'rel'
COM4	--	--	--	COM4	'min'	'rev'	1D	'p1'	2D	'p2'	3D	'p3'	4D	'p4'	5D	'p5'	6D	'lo-batt'	'in'	'mm'	--

	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE: 	MODEL NO.						
				VIEWING DIRECTION	6 O'CLOCK		GT016456PR-P						
CUSTOMER NAME				DRIVING METHOD	1/4 DUTY, 1/3 BIAS Vop=2.8V								
D341				OPERATING TEMP.	0°C TO +50°C	UNSPECIFIED: ± 0.2mm	VER.	1.0					
CUSTOMER P/N				STORAGE TEMP.	-10°C TO +60°C	UNSPECIFIED: ± 0.5°	DWG.	DATE	APPR'D.	DATE	PAGE	TEL:	
***				CONNECTION	ZEBRA		HGX	25/09/26			1 OF 2	FAX:	