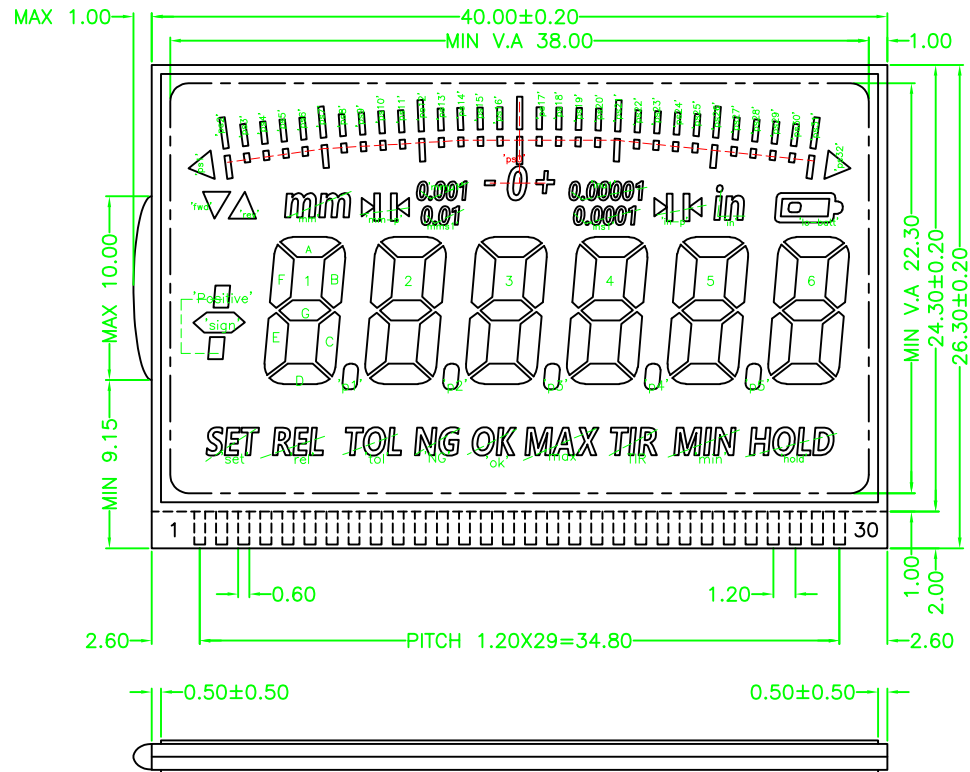


显示效果图

参数参考16456

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM1	COM1	--	--	--	'rev'	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	'ok'	'max'	'ins1'	'mm'	'lo-batt'	'ps27'	'ps26'	'ps19'	'ps18'	'ps11'	'ps10'	'ps3'	'ps1'
COM2	--	COM2	--	--	'fwd'	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	'NG'	TIR	'inu1'	'mm-p'	'ps32'	'ps28'	'ps25'	'ps20'	'ps17'	'ps12'	'ps9'	'ps4'	'ps2'
COM3	--	--	COM3	--	'sign'	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	'tol'	'min'	'in-p'	'mms1'	'ps31'	'ps29'	'ps24'	'ps21'	'ps16'	'ps13'	'ps8'	'ps5'	--
COM4	--	--	--	COM4	'Positive'	1D	'p1'	2D	'p2'	3D	'p3'	4D	'p4'	5D	'p5'	6D	'set'	'rel'	'hold'	'in'	'mmu1'	'ps0'	'ps30'	'ps23'	'ps22'	'ps15'	'ps14'	'ps7'	'ps6'	--

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.					
				VIEWING DIRECTION	6 O'CLOCK		GT016457PR-P					
D341				DRIVING METHOD	1/4 DUTY, 1/3 BIAS Vop=2.8V	UNSPECIFIED:	VER.	1.0				
CUSTOMER P/N				OPERATING TEMP.	0°C TO +50°C	± 0.2mm	DWG.	DATE	APPR'D.	DATE	PAGE	TEL:
***				STORAGE TEMP.	-10°C TO +60°C	UNSPECIFIED:	HGX	25/09/26			1 OF 2	FAX:
				CONNECTION	ZEBRA	± 0.5°						