

SCHEMATIC IS THE SAME AS THE OTHER SIDE


CONTROLER

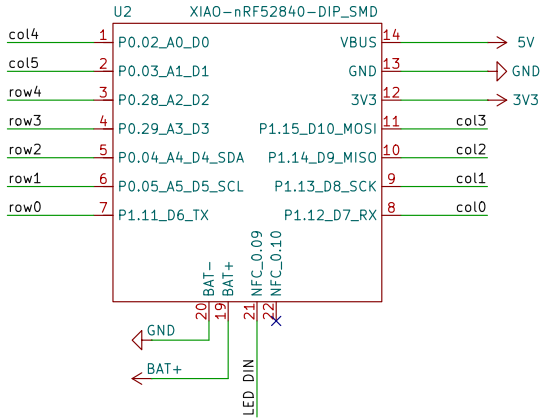


H5 MountingHole
H6 MountingHole
H7 MountingHole
H8 MountingHole

POWER





LED

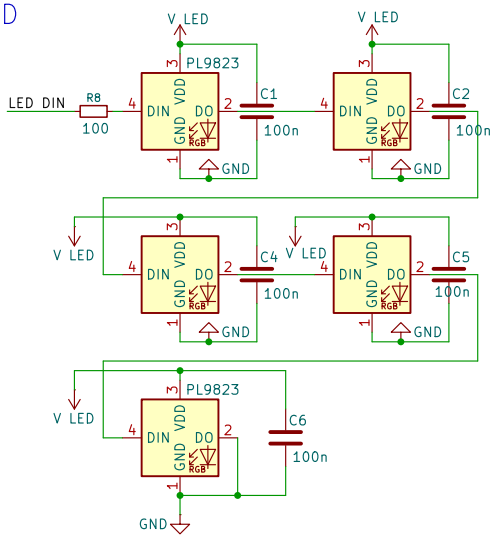

If you want brighter light use 5V from VBUS and 74AHC125 on first DIN
OR use BAT+ instead of 3V3 in V LED. BAT+ is between 3V7 and 4V2.
So minimum positive state is 2,94, so it should work

BUTTONS

