



Elmar Wings

AI with an Arduino Nano 33 BLE Sense

Realtime Object Detection with the ArduCAM

Version: 1765
June 9, 2026

Contents

Contents	3
List of Figures	5
List of Listings	7
1 Distance, Speed and Acceleration Detection Algorithms	11
1.1 Review of Distance Measurement Methods	11
1.2 Review of Speed and Acceleration Detection Algorithms	12
Stichwortverzeichnis	14

List of Figures

1.1	Design of OAK-D Pro camera	12
-----	--------------------------------------	----

List of Listings

Acronyms

1 Distance, Speed and Acceleration Detection Algorithms

1.1 Review of Distance Measurement Methods

Since Mitsubishi released the first cruise control with distance control in 1995, the vast majority of ACC functions have been based on Laser Radar or millimeter-wave radar (MWR).¹ But a few have opted to use a binocular camera as the basis for the technology, such as Subaru’s EyeSight technology.² Each of these different sets of technical solutions has its own advantages and disadvantages:

Technology	Advantages	Disadvantages
Laser Radar (LiDAR)	- High accuracy and resolution - Capable of creating detailed 3D maps - Effective for object detection and classification	- Expensive - Affected by adverse weather conditions - High power consumption
Millimeter-Wave Radar	- Less affected by weather conditions - Long-range detection capabilities - Lower cost compared to LiDAR	- Lower resolution than LiDAR - Limited in detecting small or non-metallic objects - Can be affected by interference
Binocular Camera Systems	- Lower cost compared to LiDAR and radar - High resolution for nearby objects - Uses passive sensing (no emissions)	- Computationally intensive - Accuracy decreases with distance - Affected by lighting conditions

Table 1.1: Comparison of distance measurement technologies: LiDAR, Millimeter-Wave Radar, and Binocular Cameras

For cars using Laser Radar, LiDAR operates by emitting laser pulses towards objects in front of the vehicle. When these pulses hit an object, they are reflected back to the sensor, which measures the time it takes for the pulses to return. This time-of-flight measurement allows the system to calculate the precise distance to the object, as well as its relative speed and position. For cars using millimeter-wave radar, the functional implementation is similar.

For systems that use binocular cameras, this process can be relatively more complex; essentially distance recognition for binocular camera-based systems utilizes bionics: Binocular disparity. This method involves using a pair of cameras positioned at a certain distance apart to capture two images with different viewing angles. By comparing the disparity between the two images (i.e., the difference in pixel positions).³

$$\text{depth} = \frac{f \times \text{baseline}}{\text{disparity}} \quad (1.1)$$

where depth represents the distance of an object from the camera, f denotes the focal length of the camera, baseline is the distance between the two cameras, and disparity is the difference in image location of the object in the two camera views.

¹MI-PILOT, Mitsubishi Motors, <https://www.mitsubishi-motors.com/en/brand/technology/mipilot2/index.html>

²EyeSight technology, Subaru, <https://www.subaru.com/eyesight.html>

³Mansour, M., Davidson, P., Stepanov, O. and Piché, R., 2019. Relative Importance of Binocular Disparity and Motion Parallax for Depth Estimation: A Computer Vision Approach. Remote Sensing, 11(17), p.1990. <https://doi.org/10.3390/rs11171990>

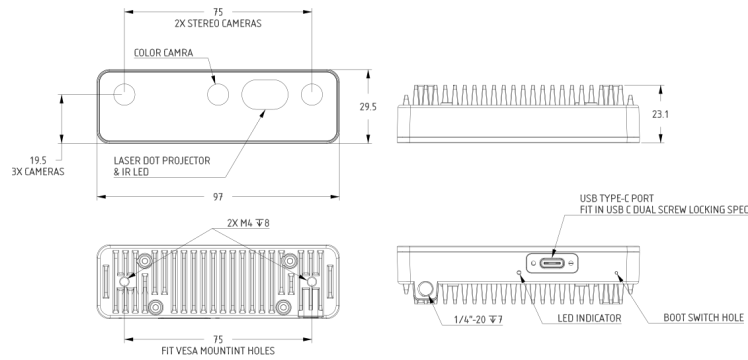


Figure 1.1: Design of OAK-D Pro camera

For the OAK-D Pro camera, the baseline distance, which is the distance between the two monochrome cameras, is 7.5 cm.⁴

According to OAK's official documentation⁵, the OAK-D Pro can reach a theoretical maximum of 35m, but at this distance there is a very significant margin of error (about 33% of the theoretical error⁶) where the distance fluctuates very significantly. However, there are ways to improve the accuracy of distance detection, such as half-pixel mode to improve the accuracy of distance detection, and averaging distances over a period of time to calculate relative distances to improve the accuracy of relative speed calculations.

1.2 Review of Speed and Acceleration Detection Algorithms

For the measurement of relative velocity, the three schemes mentioned above will actually have two different principles and calculations.

Millimeter-wave radar primarily calculates the relative speed of objects using the Doppler effect. When the radar signal hits a moving object, the frequency of the reflected wave changes depending on the relative speed between the radar and the object. This frequency shift (Doppler shift) is directly proportional to the relative speed of the object.⁷

For LiDAR and Binocular Camera Systems, the relative speed of objects is calculated based on the change in distance over time. By continuously measuring the distance to an object and comparing it with previous measurements.

Each of these different sets of technical solutions has its own advantages and disadvantages:

⁴OAK-D Pro Camera Documentation, Luxonis, 2021

⁵OAK China official Website, OAK China, 2024

⁶Depth range enhancement, Luxonis Community, 2022

⁷Millimeter Wave Radar Sensors: Fundamentals, Texas Instruments, 2018

Technology	Advantages	Disadvantages
Laser Radar (LiDAR)	- High accuracy and resolution - Capable of creating detailed 3D maps - Effective for object detection and classification	- Expensive - Affected by adverse weather conditions - High power consumption
Millimeter-Wave Radar	- Less affected by weather conditions - Long-range detection capabilities - Lower cost compared to LiDAR	- Lower resolution than LiDAR - Limited in detecting small or non-metallic objects - Can be affected by interference
Binocular Camera Systems	- Lower cost compared to LiDAR and radar - High resolution for nearby objects - Uses passive sensing (no emissions)	- Computationally intensive - Accuracy decreases with distance - Affected by lighting conditions

Table 1.2: Comparison of distance measurement technologies: LiDAR, Millimeter-Wave Radar, and Binocular Cameras

