


Canonical BVM / internal readout

representative logical-1 + canonical READ deck · +100 μ A source PWL

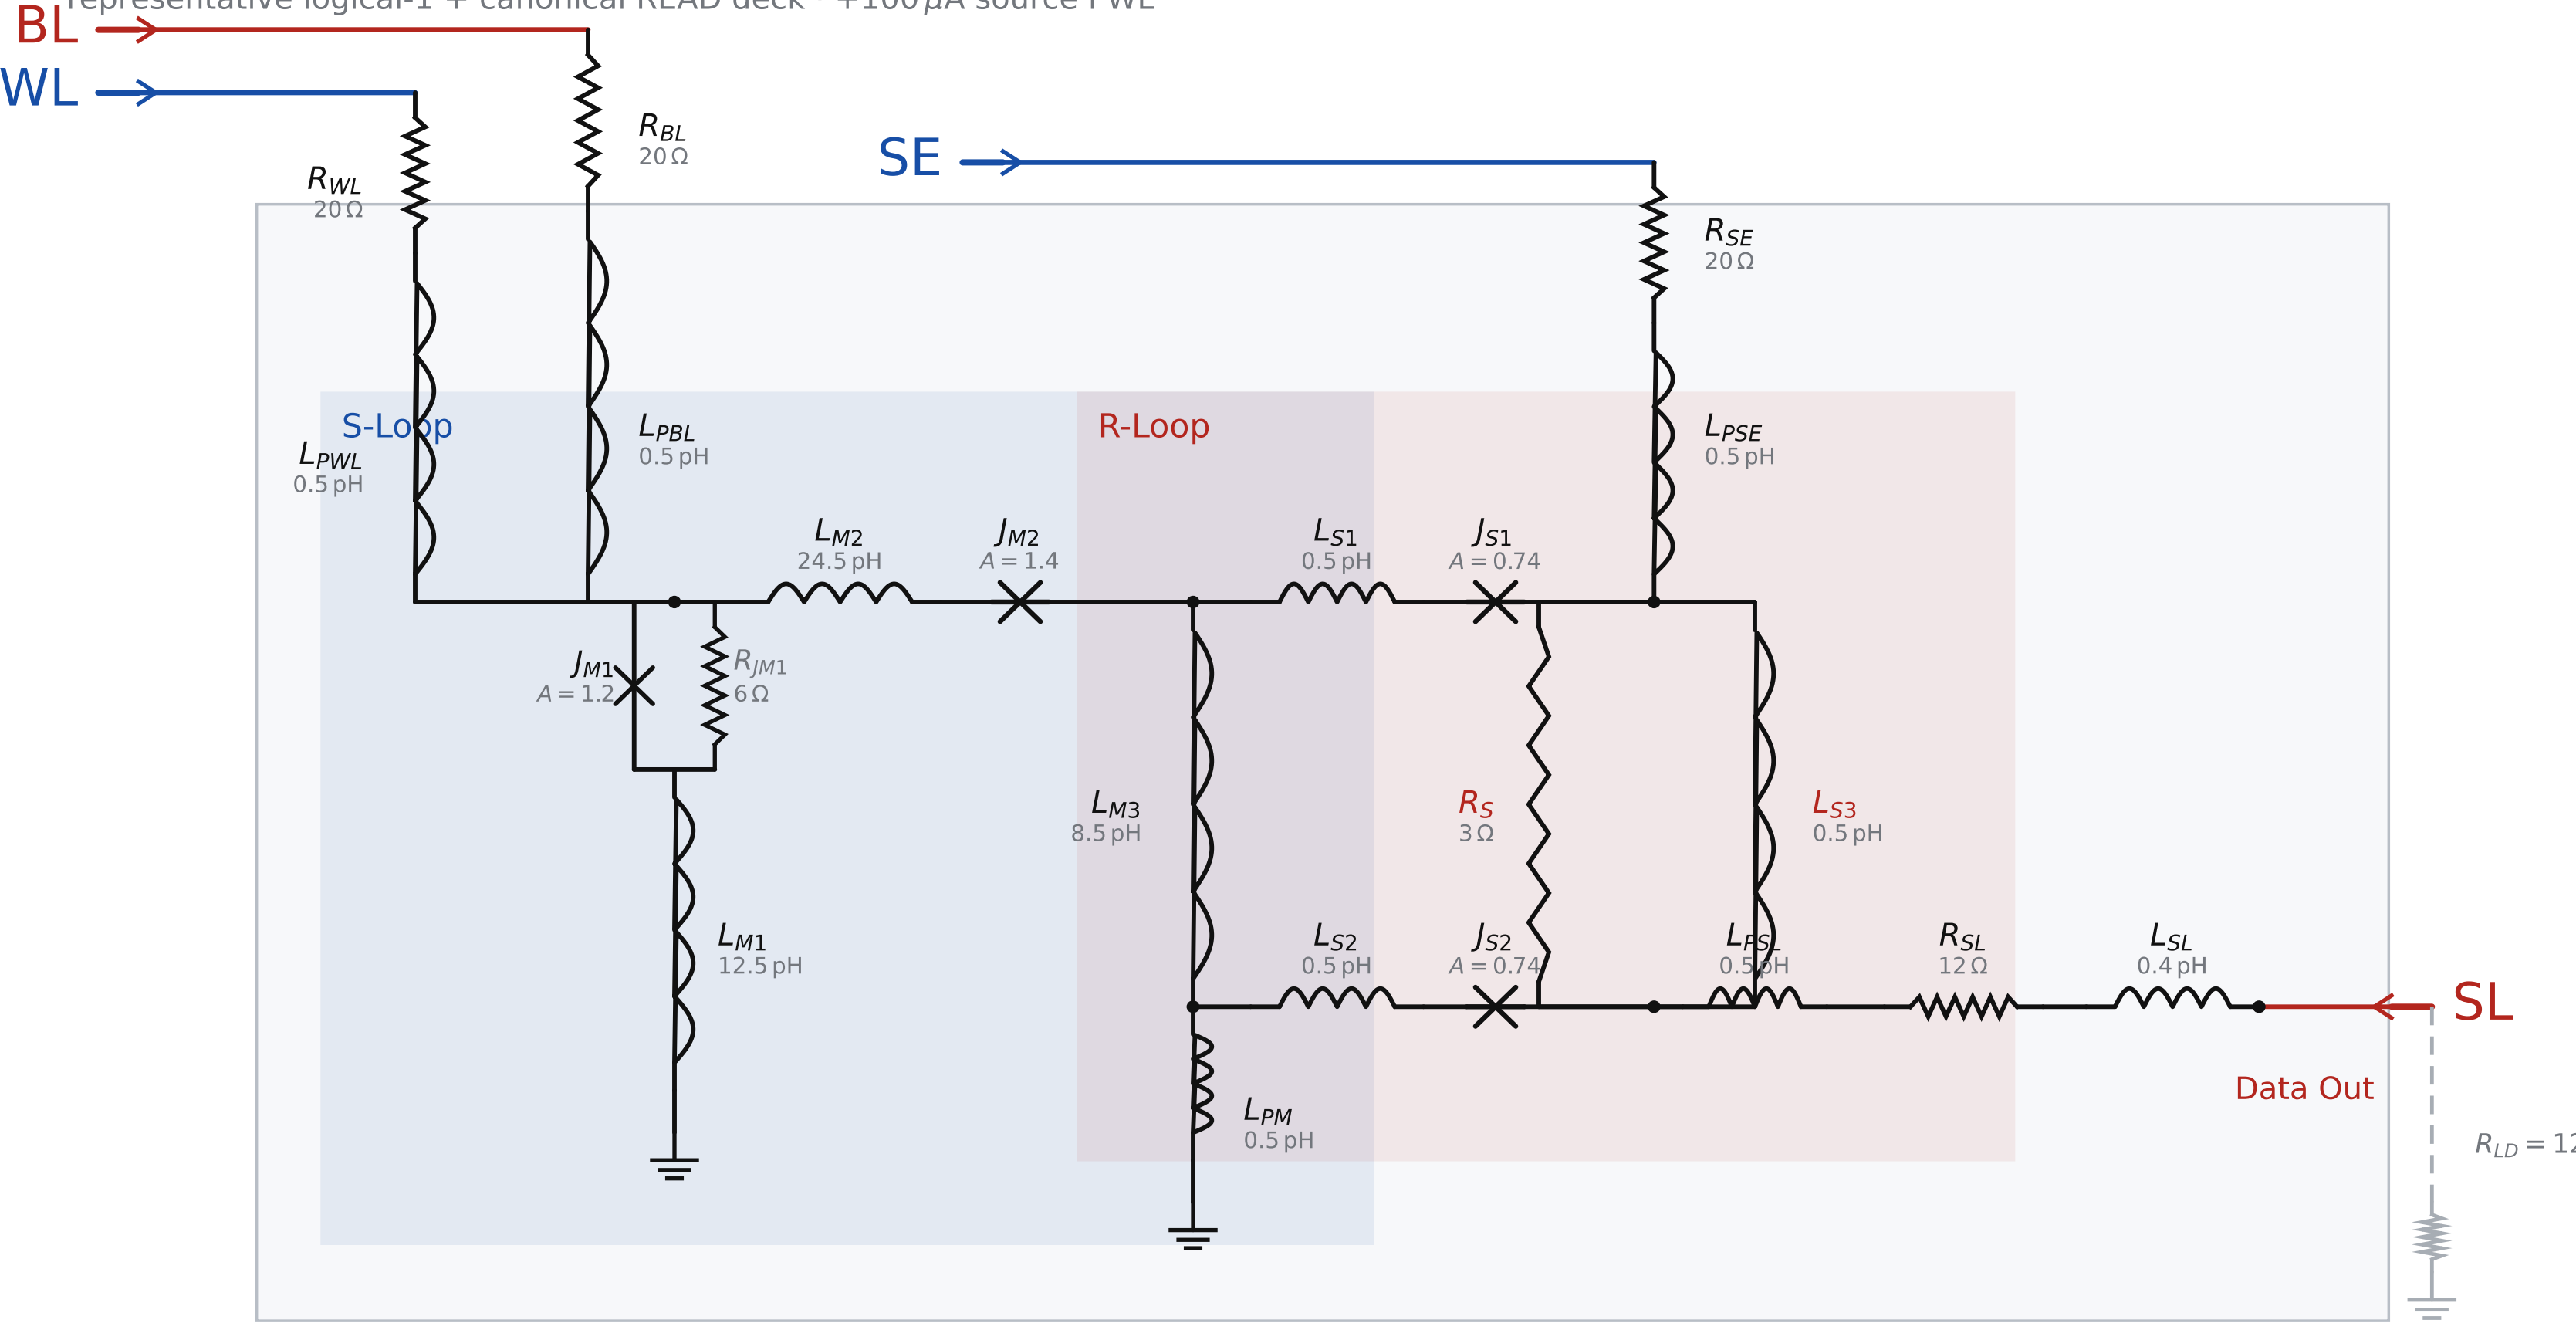

BVM v6 · $R_{WL} = R_{BL} = R_{SE} = 20 \Omega$ · $L_{PWL} = L_{PBL} = L_{PSE} = L_{PSL} = 0.5 \text{ pH}$ · $R_S = 3 \Omega$ · $R_{SL} = 12 \Omega$ · $L_{SL} = 0.4 \text{ pH}$

$J_{M1}/J_{M2}/J_{S1}/J_{S2}$ areas = 1.2/1.4/0.74/0.74; blue = S-Loop, red = R-Loop, gray = external load boundary.