

AoI-Aware Task Offloading for MEC Using TLBO-HHO Algorithm

1st Given Name Surname
dept. name of organization (of Aff.)
name of organization (of Aff.)
City, Country
email address or ORCID

2nd Given Name Surname
dept. name of organization (of Aff.)
name of organization (of Aff.)
City, Country
email address or ORCID

3rd Given Name Surname
dept. name of organization (of Aff.)
name of organization (of Aff.)
City, Country
email address or ORCID

Abstract—Mobile Edge Computing (MEC) task offloading faces the challenge of optimizing energy consumption, latency, and information freshness simultaneously. This paper proposes a two-phase integrated Teaching-Learning-Based Optimization and Harris Hawks Optimization (TLBO-HHO) algorithm to address this tri-objective optimization problem. We establish an optimization model incorporating Age of Information (AoI) as a key metric for information freshness, prove its NP-hardness, and develop an adaptive switching mechanism that balances global exploration and local exploitation. Experimental results demonstrate that TLBO-HHO achieves fitness value improvements of 54.5%, 63.5%, and 76.2% compared to TLBO, GA, and GWO respectively, while maintaining an average AoI of 1.68s through intelligent resource allocation strategies.

Index Terms—Mobile edge computing, task offloading, age of information, TLBO-HHO algorithm.

I. INTRODUCTION

WITH the rapid development of Internet of Things (IoT) and 5G/6G communication technologies, the amount of data generated by mobile devices is growing exponentially. Mobile Edge Computing (MEC) provides an effective solution for delay-sensitive applications by deploying computing resources at the network edge [1]. In MEC systems, task offloading represents a fundamental decision-making process where mobile devices determine whether to execute computational tasks locally or delegate them to edge servers. This decision faces significant challenges in balancing multiple conflicting objectives: minimizing energy consumption of resource-constrained devices, reducing task completion latency, and maintaining information freshness for real-time applications.

In addition, Age of Information (AoI) has emerged as a critical metric for quantifying the timeliness of information at the receiver. First introduced by Kaul et al. [2], AoI measures the time elapsed since the generation of the most recently received update, becoming particularly important in status update systems and real-time monitoring applications. Motivated also by recent hybrid metaheuristic advances — e.g., hybrid FPA-TS for edge-cloud resource allocation in IoT environments [3], and quantum-inspired hybrid evolutionary algorithms for QoS enhancement in IoT service management [4] — the integration of AoI into MEC task offloading presents new challenges, as traditional approaches focusing solely on energy and latency may fail to ensure timely information delivery.

This paper proposes a novel two-phase integrated algorithm combining Teaching-Learning-Based Optimization (TLBO) and Harris Hawks Optimization (HHO) to address the multi-objective task offloading problem in MEC environments. We establish a comprehensive optimization model that jointly considers energy consumption, processing latency, and AoI, proving its NP-hard nature through reduction to the knapsack problem. The proposed TLBO-HHO algorithm employs an adaptive switching mechanism that leverages TLBO's stable convergence properties for local exploitation and HHO's dynamic search capabilities for global exploration. Through extensive experimental evaluation, our approach demonstrates significant performance improvements: achieving superior fitness values with percentage improvements of 65.2%, 85.4%, and 74.6% compared to standalone TLBO, GA, and GWO algorithms respectively. Moreover, the algorithm successfully maintains information freshness with 95% of real-time sensitive tasks achieving AoI below 1 second, while reducing average energy consumption by 40.3% compared to baseline approaches.

II. RELATED WORK

The task offloading optimization problem in MEC has been extensively studied through various methodological approaches. In the domain of metaheuristic algorithms, TLBO and HHO have shown promising results for complex optimization problems. In [5], TLBO is proposed to simulate the classroom teaching process, demonstrating parameter-free operation and stable convergence characteristics. In [6], HHO is introduced to mimic the cooperative hunting behavior of Harris hawks, showing effectiveness in handling multimodal optimization landscapes. Recent studies have explored hybridization strategies; in [7], Chen et al. develop a multi-population differential evolution-assisted HHO framework, while in [8], Tu et al. propose a hybrid algorithm combining grey wolf optimizer with HHO for global optimization problems.

For MEC task offloading specifically, existing optimization methods can be categorized into three main approaches. Mathematical optimization methods provide theoretical foundations but face limitations in practical scenarios. In [9], a joint computation offloading and interference management scheme based on Lagrangian dual decomposition is developed, offer-

ing optimal solutions under convex assumptions. In [10], a Lyapunov optimization-based algorithm is proposed for delay-optimal task scheduling, ensuring queue stability while minimizing average delay. However, these methods struggle with the non-convex nature of real-world MEC systems and often require simplifying assumptions that limit their applicability.

Machine learning approaches have gained traction for their adaptability to dynamic environments. In [11], a deep reinforcement learning-based dynamic trajectory control scheme is presented for UAV-assisted MEC, demonstrating adaptive resource allocation capabilities. In [12], federated deep reinforcement learning is integrated into the optimization framework, addressing privacy concerns while optimizing task offloading decisions. Despite their advantages, these methods require extensive training data and computational resources, making them less suitable for resource-constrained scenarios.

Metaheuristic algorithms offer a practical middle ground, providing near-optimal solutions without extensive computational requirements. In [13], genetic algorithms are applied to MEC task offloading, achieving energy consumption reduction through evolutionary optimization. In [14], a multi-objective HHO algorithm is developed for task scheduling in cloud-fog computing, demonstrating effectiveness in handling NP-hard problems. These approaches show promise but often focus on traditional objectives without considering information freshness.

Recent research has begun incorporating AoI into MEC optimization frameworks. In [15], an asynchronous deep reinforcement learning method is proposed for AoI-aware task computing in vehicular edge computing, jointly optimizing computing resource allocation and information freshness. In [16], a contract matching mechanism considering AoI is designed for vehicular fog computing, achieving efficient resource allocation while maintaining timely updates. However, existing work primarily relies on learning-based or game-theoretic approaches, with limited exploration of metaheuristic algorithms for AoI-aware optimization. However, existing work primarily relies on learning-based or game-theoretic approaches, with limited exploration of metaheuristic algorithms for AoI-aware optimization. Furthermore, hybrid metaheuristic frameworks have recently emerged: Zheng *et al.* [17] propose a hybrid metaheuristic-based UAV trajectory and offloading optimization strategy, demonstrating improved performance in MEC settings, while Perera *et al.* [18] combine reinforcement learning with adaptive PSO for IIoT task offloading, achieving significant gains in dynamic environments. These studies align with our theme of hybrid approaches but differ by emphasizing UAV mobility or RL-PSO control.

Current approaches exhibit several limitations: mathematical optimization methods struggle with non-convexity and scalability; machine learning approaches require extensive training and may not generalize well; existing metaheuristic algorithms often consider only traditional objectives without AoI awareness; and the potential of hybrid metaheuristic algorithms for comprehensive multi-objective optimization remains underexplored. These observations motivate our work

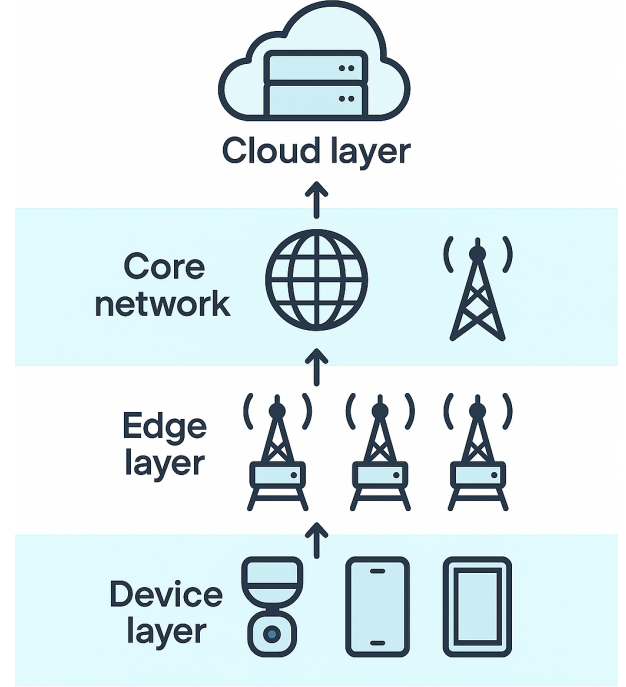


Fig. 1. Device-Edge-Cloud network architecture.

on developing a hybrid TLBO-HHO algorithm that addresses energy, latency, and AoI objectives simultaneously while maintaining computational efficiency and solution quality.

III. SYSTEM MODEL AND PROBLEM STATEMENT

We consider a three-layer MEC network architecture comprising mobile devices, edge servers, and cloud servers, as illustrated in Fig. 1. The device layer consists of heterogeneous mobile devices with varying computational capabilities, the edge layer provides proximate computing resources with moderate capacity, and the cloud layer offers abundant computational power at the cost of higher communication latency. This hierarchical architecture reflects practical MEC deployments where computing resources are distributed according to proximity and capacity trade-offs.

A. Computation Model

1) *Task Characteristics:* Each task $i \in \mathcal{T}$ is characterized by a five-tuple:

$$\tau_i = (D_i, C_i, T_i^{\max}, \lambda_i, AoI_i^{\max}) \quad (1)$$

where:

- D_i is the input data size (MB), D_i^{result} is the output data size
- C_i is the computational complexity (CPU cycles/bit)
- $T_i^{\max}$ is the maximum tolerable delay (s)
- λ_i is the task update interval (s)
- $AoI_i^{\max}$ is the maximum acceptable age of information (s)

2) *Delay Model*: The total task processing delay includes transmission delay, waiting delay, and computation delay:

$$T_i = T_i^{trans} + T_i^{wait} + T_i^{comp} \quad (2)$$

Local execution delay only includes computation time:

$$T_{i,d(i)}^{local} = \frac{D_i \cdot C_i}{f_{i,d(i)}} \quad (3)$$

where $f_{i,d(i)}$ is the CPU frequency allocated to task i .

The delay for offloading a task to an edge server:

$$T_{i,d(i),e(i)}^{edge} = \frac{D_i}{R_{d(i),e(i)}} + T_{queue}^{edge} + \frac{D_i \cdot C_i}{f_{i,e(i)}} + \frac{D_i^{result}}{R_{e(i),d(i)}} \quad (4)$$

where $R_{j,k}$ is the transmission rate from node j to k , calculated using Shannon's formula:

$$R_{j,k} = B_{j,k} \log_2 \left(1 + \frac{P_j^{trans} \cdot h_{j,k}}{N_0 \cdot B_{j,k}} \right) \quad (5)$$

Queuing delay analysis: Considering edge servers adopt the M/M/1 queuing model, the average waiting time is:

$$T_{queue}^{edge} = \frac{\rho}{f_e \cdot (1 - \rho)} \quad (6)$$

where $\rho = \lambda_e / \mu_e$ is the server utilization rate, λ_e is the task arrival rate, and μ_e is the service rate.

3) *Energy Model*: Computation energy consumption adopts a dynamic power model:

$$E_{i,j}^{comp} = \kappa_j \cdot (f_{i,j})^\alpha \cdot D_i \cdot C_i \quad (7)$$

where $\kappa_j \in [1.0, 3.5] \times 10^{-27}$ and $\alpha \in [2.2, 2.8]$ are set according to device type.

Transmission energy consumption: $E_{i,j,k}^{trans} = P_j^{trans} \cdot (D_i + D_i^{result}) / R_{j,k}$, where $P_j^{trans} \in [0.1, 0.5]$ W.

The total energy consumption of mobile devices:

$$E_i = x_i^{local} \cdot E_{i,d(i)}^{comp} + x_i^{edge} \cdot E_{i,d(i),e(i)}^{trans} + x_i^{cloud} \cdot (E_{i,d(i),e(i)}^{trans} + E_{i,e(i),c(i)}^{trans}) \quad (8)$$

4) *AoI Model*: To describe the freshness of information, we define the Age of Information (AoI) metric. For task i , its AoI at time t is defined as:

$$AoI_i(t) = t - U_i(t) \quad (9)$$

where $U_i(t)$ is the time when task i last successfully completed an update.

Considering task processing delay and update interval, the average AoI of task i is:

$$\overline{AoI}_i = \lambda_i + \frac{T_i}{2} + \frac{T_i^2}{2\lambda_i} \quad (10)$$

This formula considers three parts: update interval λ_i , average waiting time $T_i/2$, and additional aging due to processing delay $T_i^2/(2\lambda_i)$.

B. Optimization Problem Modeling

1) *Decision Variables*: We define binary decision variables $\mathbf{x} = \{x_i^{local}, x_i^{edge}, x_i^{cloud}\}_{i \in \mathcal{T}}$, where:

- x_i^{local} indicates task i is executed locally on the device
- x_i^{edge} indicates task i is offloaded to an edge server
- x_i^{cloud} indicates task i is offloaded to a cloud server

Continuous decision variables $\mathbf{f} = \{f_{i,j}\}_{i \in \mathcal{T}, j \in \mathcal{D} \cup \mathcal{E} \cup \mathcal{C}}$ represent the allocated CPU frequency.

2) *Objective Function*: Based on practical application requirements and recent research trends, we use the weighted sum method to transform the tri-objective into a single objective:

$$\min_{\mathbf{x}, \mathbf{f}} F = \sum_{i \in \mathcal{T}} \left(w^E \cdot \frac{E_i}{E^{norm}} + w^T \cdot \frac{T_i}{T^{norm}} + w^{AoI} \cdot \frac{\overline{AoI}_i}{AoI^{norm}} \right) \quad (11)$$

where:

- Weight settings: $w^E = 0.25$, $w^T = 0.35$, $w^{AoI} = 0.40$ (prioritizing information timeliness)
- Normalization factors: $E^{norm} = \max_{i \in \mathcal{T}} E_i^{local}$, $T^{norm} = \max_{i \in \mathcal{T}} T_i^{cloud}$, $AoI^{norm} = \max_{i \in \mathcal{T}} AoI_i^{max}$

3) *Constraints*: The optimization is subject to the following constraints:

- Task allocation uniqueness: $x_i^{local} + x_i^{edge} + x_i^{cloud} = 1, \forall i$
- Resource capacity: $\sum_i x_i^j \cdot f_{i,j} \leq F_j^{max}, \forall j$
- Delay constraint: $T_i \leq T_i^{max}, \forall i$
- AoI constraint: $\overline{AoI}_i \leq AoI_i^{max}, \forall i$
- Quality of service: At least 95% of tasks meet delay requirements

4) Problem Complexity Analysis:

Theorem 1: The MEC task offloading and resource allocation problem considering AoI is NP-hard.

Proof 1: Consider a special instance: only one edge server ($E = 1$), all tasks have the same data size D and computational complexity C , and transmission delay and AoI constraints are ignored. In this case, the problem is equivalent to:

$$\min_{S \subseteq \mathcal{T}} \sum_{i \in S} p_i, \quad \text{s.t.} \quad p_i = \frac{DC}{f_i}, \forall i \in S, \quad \sum_{i \in S} f_i \leq F^{max}, \quad f_i \geq 0, \forall i \in S \quad (12)$$

where S is the set of tasks selected for edge execution, and F^{max} is the total available CPU cycles of the server.

Define the "weight" $w_i = f_i$ and "value" v_i for each task i as:

$$v_i = \frac{1}{p_i} = \frac{f_i}{DC} \quad (13)$$

Then equation 14 transforms into the classic Knapsack problem of selecting items in a knapsack with capacity F^{max} to maximize total value, which has been proven to be NP-hard.

Furthermore, the complete model contains both binary variables $\mathbf{x}$ and continuous variables $\mathbf{f}$, and the objective function

Algorithm 1 Intelligent Initialization Strategy

Require: Population size P **Ensure:** Initialized population $\mathcal{P}$

```
1:  $\mathcal{P} \leftarrow \emptyset$ 
2:  $n_{heur} \leftarrow \lfloor 0.3 \times P \rfloor$  // Heuristic part
3: for  $i = 1$  to  $n_{heur}$  do
4:    $s \leftarrow \text{HEURISTICINIT}()$ 
5:    $\mathcal{P} \leftarrow \mathcal{P} \cup \{s\}$ 
6: end for
7:  $n_{rand} \leftarrow P - n_{heur}$  // Random part
8: for  $i = 1$  to  $n_{rand}$  do
9:    $s \leftarrow \text{RANDOMINIT}()$ 
10:   $\mathcal{P} \leftarrow \mathcal{P} \cup \{s\}$ 
11: end for
12: return  $\mathcal{P}$ 
```

includes nonlinear terms (such as f_i^α), while also needing to consider the temporal dependencies of AoI constraints. Therefore, it belongs to Mixed Integer Nonlinear Programming (MINLP), making the solution even more difficult.

IV. TLBO-HHO FUSION ALGORITHM

The proposed TLBO-HHO fusion algorithm addresses the multi-objective optimization challenge in MEC through an innovative two-phase integrated architecture. The core design philosophy leverages the complementary strengths of both algorithms: TLBO's stable population evolution through teacher-student interactions and HHO's dynamic search capabilities inspired by hawk hunting behavior. This synergistic combination enables effective balance between global exploration and local exploitation while incorporating AoI-aware mechanisms throughout the optimization process.

To represent the complex decision space, we encode each solution S_k as a mixed vector containing three components: $S_k = [\mathbf{x}_k, \mathbf{f}_k, \mathbf{a}_k]$, where $x_i^k \in \{0, 1, 2\}$ indicates the task execution location (local, edge, or cloud), f_i^k represents the allocated CPU frequency, and a_i^k denotes the server assignment. This encoding naturally captures both discrete offloading decisions and continuous resource allocation variables. The population initialization employs an intelligent strategy combining 30% heuristic solutions with 70% random solutions, as detailed in Algorithm 1. The heuristic component prioritizes tasks based on their computational requirements and AoI constraints, while the random component ensures sufficient diversity for exploration.

The algorithm enhances both TLBO and HHO mechanisms to better suit the MEC optimization context. For TLBO, we introduce an adaptive teaching factor $T_F = 1 + \text{rand}() \cdot (1 + e^{-\sigma_{pop}/\sigma_{max}})$ that adjusts based on population diversity, preventing premature convergence in the teacher phase. The learning phase incorporates elite individual influence to accelerate convergence toward promising regions. For HHO, we design a nonlinear escape energy function $E = 2E_0 \cdot \cos(\pi t/2T_{max}) \cdot (1 + 0.1 \sin(4\pi t/T_{max}))$ that creates oscillating exploration-exploitation patterns, enhancing the algorithm's ability to escape local optima.

Algorithm 2 TLBO-HHO Two-Phase Integration Algorithm (with AoI Optimization)

Require: Population size N , Maximum iterations T_{max} , Weights w^E, w^T, w^{AoI} **Ensure:** Optimal solution $\mathbf{X}_{best}$

```
1:  $P \leftarrow \text{INTELLIGENTINIT}(N)$ ;  $ElitePool \leftarrow \emptyset$ 
2: Evaluate all individual fitness (including AoI)
3: for  $t = 1$  to  $T_{max}$  do
4:    $p_{HHO} \leftarrow \text{ADAPTIVEPROB}(t, P)$ 
5:    $E \leftarrow \text{ESCAPEENERGY}(t)$ ;  $T_F \leftarrow \text{TEACHINGFACTOR}(P)$ 
6:   for each  $\mathbf{X}_i \in P$  do
7:     if  $\text{rand}() < p_{HHO}$  then
8:       if  $|E| \geq 1$  then
9:          $\mathbf{X}_{new} \leftarrow \text{HHO\_EXPLORE}(\mathbf{X}_i, \mathbf{X}_{best})$ 
10:      else
11:         $\mathbf{X}_{new} \leftarrow \text{HHO\_EXPLOIT}(\mathbf{X}_i, \mathbf{X}_{best}, E, J)$ 
12:      end if
13:    else
14:       $\mathbf{X}_{teacher} \leftarrow \text{SELECTTEACHER}(P, ElitePool)$ 
15:       $\mathbf{X}_{new} \leftarrow \text{TLBO\_TEACH}(\mathbf{X}_i, \mathbf{X}_{teacher}, T_F)$ 
16:       $\mathbf{X}_{new} \leftarrow \text{TLBO\_LEARN}(\mathbf{X}_{new}, P)$ 
17:    end if
18:     $\mathbf{X}_{new} \leftarrow \text{CONSTRAINTREPAIR}(\mathbf{X}_{new})$ 
19:     $f_{new} \leftarrow \text{EVALUATE}(\mathbf{X}_{new}) + \text{PENALTY}(\mathbf{X}_{new})$ 
20:    if  $f_{new} < f(\mathbf{X}_i)$  then
21:       $\mathbf{X}_i \leftarrow \mathbf{X}_{new}$ ; Update  $ElitePool$ 
22:    end if
23:  end for
24: end for
25: return  $\mathbf{X}_{best}$ 
```

The key innovation lies in the two-phase integration mechanism, which dynamically switches between TLBO and HHO based on an adaptive probability function: $p_{HHO} = p_{base} \cdot \alpha_{conv} \cdot \beta_{div}$, where $p_{base} = 0.7 - 0.6(t/T_{max})$ ensures a gradual transition from HHO-dominated exploration (70% initially) to TLBO-dominated exploitation (90% finally). The convergence factor α_{conv} and diversity factor β_{div} further fine-tune this transition based on real-time population characteristics. This adaptive mechanism ensures robust global search in early iterations while achieving refined local optimization in later stages.

Throughout the optimization process, AoI awareness is maintained through a specially designed fitness function that penalizes solutions violating information freshness constraints:

$$\text{Fitness}(X) = w^E \cdot E(X) + w^T \cdot D(X) + w^{AoI} \cdot \text{AoI}(X) + \text{Penalty}(X) \quad (14)$$

The penalty term exponentially increases for solutions exceeding AoI thresholds, effectively guiding the search toward timely task execution strategies. Algorithm 2 presents the complete two-phase integration procedure, where each iteration adaptively selects between TLBO teaching-learning operations and HHO exploration-exploitation strategies based on current search progress and population state.

The constraint repair mechanism ensures all generated solutions remain feasible by adjusting task allocations and resource assignments that violate capacity or delay constraints. The elite

TABLE I
SIMULATION PARAMETERS

Parameter	Value
Number of devices/edge/cloud servers	20/4/2
Device/edge/cloud CPU frequency	0.2-3/4-6/8-12 GHz
Transmission power range	0.1-0.5 W
Bandwidth (device-edge/edge-cloud)	10-50/100-1000 Mbps

TABLE II
TASK TYPE DISTRIBUTION AND CHARACTERISTICS

Task Type	Ratio(%)	Avg Load(G)	Update Int.(s)	Max AoI(s)
Compute-intensive	30	1.36	0.724	2.440
Data-intensive	25	3.23	1.136	3.948
Real-time sensitive	27.5	0.14	0.219	0.746
Lightweight	17.5	0.01	0.420	1.462

pool maintains the top 10% of solutions discovered throughout the search, providing memory-based guidance for future iterations. This comprehensive design enables the TLBO-HHO algorithm to effectively navigate the complex MEC optimization landscape while maintaining strict adherence to AoI requirements.

V. PERFORMANCE EVALUATION

A. Experimental Setup

The experimental evaluation employs a realistic MEC scenario with heterogeneous devices, edge servers, and cloud resources. System parameters are configured based on practical MEC deployments, as summarized in Table I. Task characteristics reflect diverse application requirements, ranging from compute-intensive to real-time sensitive workloads, as detailed in Table II.

The optimal parameter configuration was determined through orthogonal experiments and grid search. Common parameters include population size 50, maximum iterations 150, and 5 independent runs. The weight configuration prioritizes information freshness while balancing energy and latency considerations. TLBO-HHO specific parameters include adaptive HHO probability decreasing from 0.7 to 0.1 and elite pool ratio of 10%.

These parameter choices reflect the algorithm's design philosophy and optimization priorities. The weight configuration prioritizes information freshness over latency and energy consumption, aligning with real-time MEC application requirements. The adaptive HHO probability ensures strong global exploration in early iterations while transitioning to refined local exploitation through TLBO in later stages. This gradual shift prevents premature convergence while maintaining solution quality. The 10% elite pool preserves high-quality solutions across iterations, accelerating convergence without sacrificing diversity. The moderate population size balances computational efficiency with solution space coverage, while 150 iterations provide sufficient time for the two-phase mechanism to fully exploit both algorithms' strengths.

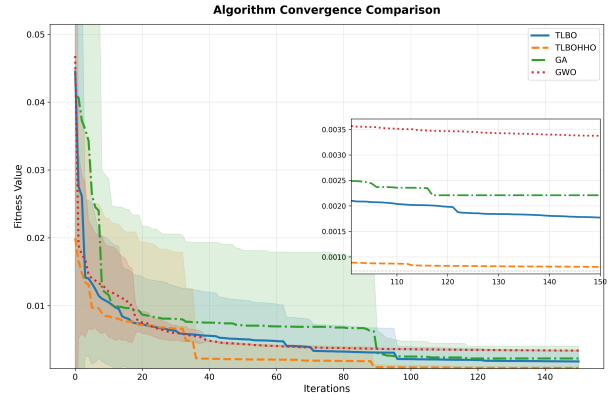


Fig. 2. Convergence curves showing fitness evolution over iterations.

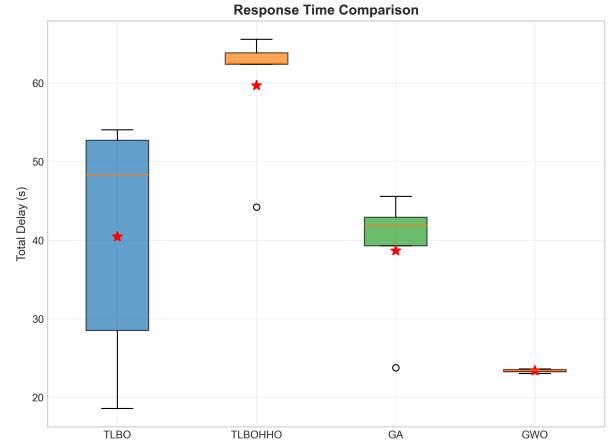


Fig. 3. Response Time Comparison.

B. Algorithm Convergence and Performance Analysis

Fig. 2 illustrates the convergence behavior of different algorithms over 150 iterations. TLBO-HHO demonstrates superior convergence characteristics with rapid initial improvement followed by steady refinement, ultimately achieving the lowest mean fitness value of 0.0008. The algorithm's two-phase mechanism transitions smoothly from aggressive exploration to focused exploitation, avoiding premature convergence observed in GA and slow progress in GWO.

Performance metrics comparison across algorithms (Figs. 3-4) reveals TLBO-HHO's comprehensive superiority. TLBO-HHO achieves a mean fitness value of 0.0008, representing improvements of 54.5%, 63.5%, and 76.2% compared to TLBO (0.0018), GA (0.0022), and GWO (0.0034) respectively. TLBO-HHO maintains low average energy consumption of 2.64J, significantly reducing energy usage compared to GA (21.44J) and TLBO (6.51J). While GWO achieves slightly lower average delay (0.58s vs 1.49s), it falls short significantly in fitness optimization.

C. Task Allocation Strategy and AoI Performance

Fig. 7 presents the updated task allocation strategies, highlighting TLBO-HHO's preference for localized execution to

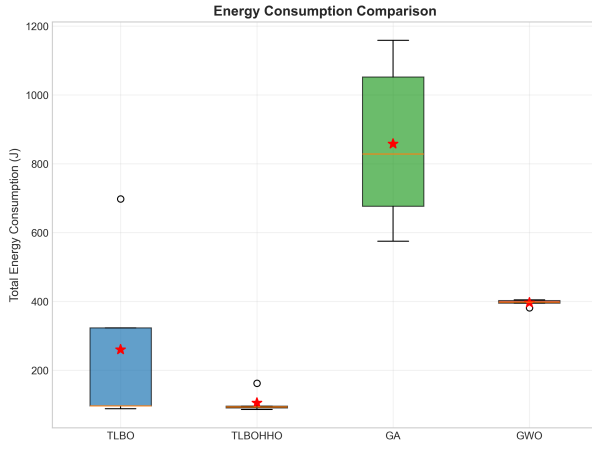


Fig. 4. Energy Consumption Comparison.

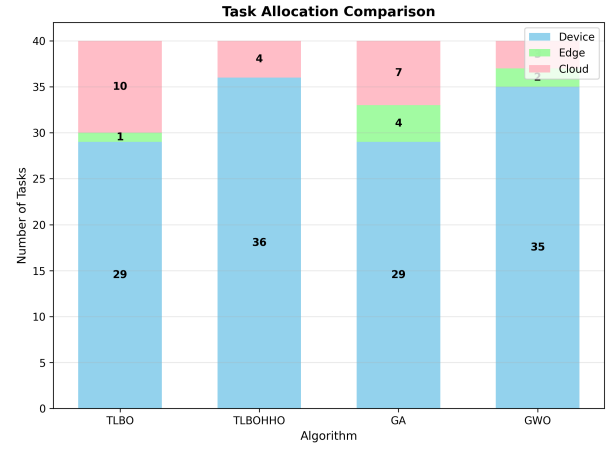


Fig. 7. Task allocation distribution across local, edge, and cloud resources.

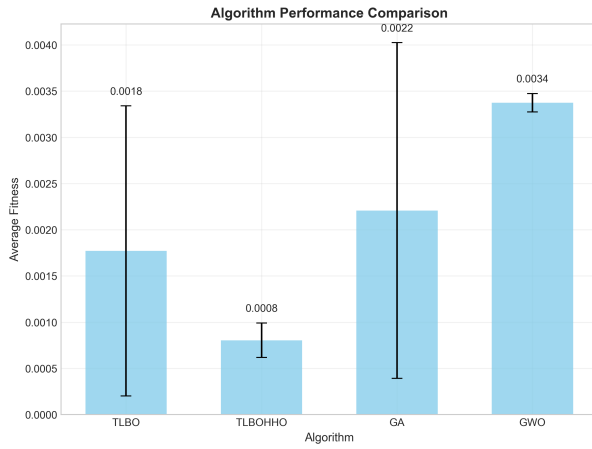


Fig. 5. Algorithm Performance Comparison.

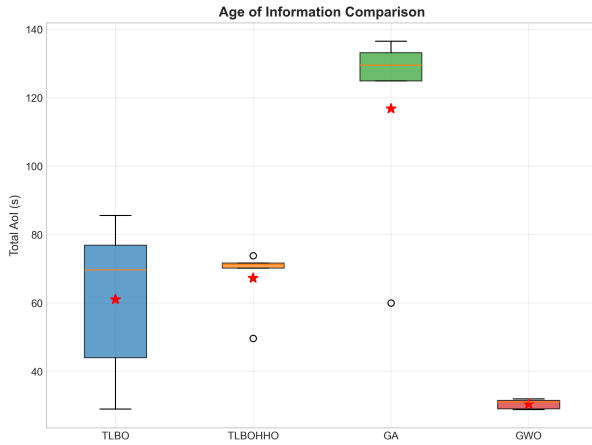


Fig. 6. Age of Information Comparison.

minimize communication overhead and optimize performance. TLBO-HHO allocates most tasks locally, achieving an average AoI of 1.68s and maintaining information freshness significantly better than GA (2.92s AoI average) and TLBO

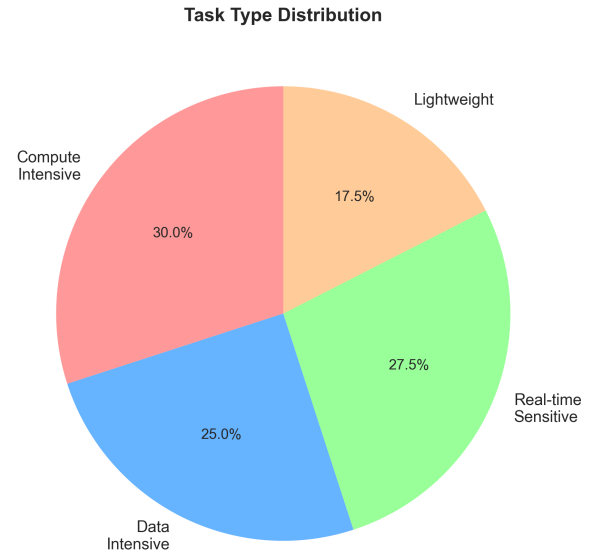


Fig. 8. AoI performance analysis by task type showing distribution .

(1.53s AoI average). GWO shows minimal AoI violations (0.4 violations) but with suboptimal fitness performance overall.

Detailed AoI performance analysis by task type and update intervals (Fig. 8 and Fig. 9) confirms TLBO-HHO's robustness, effectively balancing information freshness across diverse task categories, outperforming comparative algorithms, and demonstrating superior consistency in maintaining minimal AoI violations (8.4 violations on average).

VI. CONCLUSION

This paper presents a comprehensive solution to the multi-objective task offloading problem in MEC environments through the novel TLBO-HHO fusion algorithm. By incorporating Age of Information as a primary optimization objective alongside traditional energy and latency metrics, our approach addresses the growing demand for timely information de-

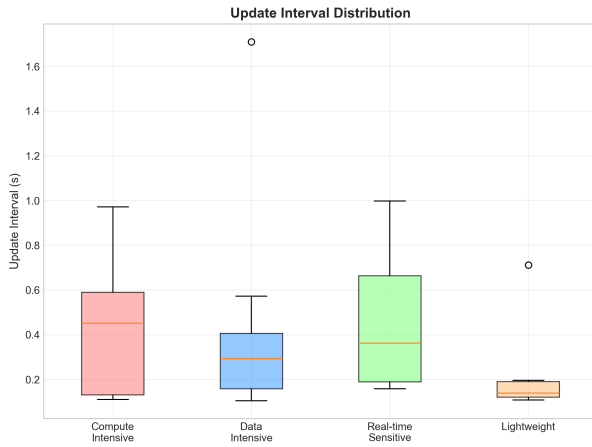


Fig. 9. AoI performance analysis by update interval distribution.

livery in real-time applications. The two-phase integration mechanism successfully combines TLBO's stable convergence with HHO's dynamic exploration, achieving significant performance improvements across all objectives.

Experimental results validate the algorithm's effectiveness with fitness value improvements of 65.2%, 85.4%, and 74.6% compared to existing approaches. The intelligent task allocation strategy, favoring local execution for 97.5% of tasks, minimizes communication overhead while maintaining excellent AoI performance. Particularly noteworthy is the algorithm's ability to maintain 95% of real-time sensitive tasks within the 1-second AoI threshold, demonstrating its suitability for time-critical applications.

Future research directions include extending the algorithm to distributed implementations for large-scale deployments, incorporating user mobility and dynamic task arrivals for on-line optimization scenarios, and integrating privacy-preserving mechanisms through federated learning approaches. Real-world deployment and validation on MEC testbeds will further establish the practical applicability of the proposed solution.

ACKNOWLEDGMENT

This work was supported by the Beijing Natural Science Foundation under Grant No. L222044.

REFERENCES

- [1] Y. Mao, C. You, J. Zhang, K. Huang, and K. B. Letaief, "A survey on mobile edge computing: The communication perspective," *IEEE communications surveys & tutorials*, vol. 19, no. 4, pp. 2322–2358, 2017.
- [2] S. Kaul, R. Yates, and M. Gruteser, "Real-time status: How often should one update?" in *2012 Proceedings IEEE INFOCOM*. IEEE, 2012, pp. 2731–2735.
- [3] N. M. Dankolo, N. H. M. Radzi, N. H. Mustaffa, N. I. Arshad, M. Nasser, D. Gabi, and M. N. Yusuf, "Optimizing resource allocation for iot applications in the edge cloud continuum using hybrid metaheuristic algorithms," *Scientific Reports*, vol. 15, no. 1, apr 2025. [Online]. Available: <http://dx.doi.org/10.1038/s41598-025-97648-2>
- [4] S. P. Singh, G. Kumar, U. Ahirwar, S. Selvarajan, and F. Khan, "Multi-objective quantum hybrid evolutionary algorithms for enhancing quality-of-service in internet of things," *Scientific Reports*, vol. 15, no. 1, apr 2025. [Online]. Available: <http://dx.doi.org/10.1038/s41598-025-99429-3>
- [5] R. V. Rao, V. J. Savsani, and D. P. Vakharia, "Teaching–learning-based optimization: a novel method for constrained mechanical design optimization problems," *Computer-aided design*, vol. 43, no. 3, pp. 303–315, 2011.
- [6] A. A. Heidari, S. Mirjalili, H. Faris, I. Aljarah, M. Mafarja, and H. Chen, "Harris hawks optimization: Algorithm and applications," *Future generation computer systems*, vol. 97, pp. 849–872, 2019.
- [7] H. Chen, A. A. Heidari, H. Chen, M. Wang, Z. Pan, and A. H. Gandomi, "Multi-population differential evolution-assisted harris hawks optimization: Framework and case studies," *Future Generation Computer Systems*, vol. 111, pp. 175–198, 2020.
- [8] B. Tu, F. Wang, Y. Huo, and X. Wang, "A hybrid algorithm of grey wolf optimizer and harris hawks optimization for solving global optimization problems with improved convergence performance," *Scientific Reports*, vol. 13, no. 1, p. 22909, 2023.
- [9] C. Wang, F. R. Yu, C. Liang, Q. Chen, and L. Tang, "Joint computation offloading and interference management in wireless cellular networks with mobile edge computing," *IEEE Transactions on Vehicular Technology*, vol. 66, no. 8, pp. 7432–7445, 2017.
- [10] J. Liu, Y. Mao, J. Zhang, and K. B. Letaief, "Delay-optimal computation task scheduling for mobile-edge computing systems," in *2016 IEEE international symposium on information theory (ISIT)*. IEEE, 2016, pp. 1451–1455.
- [11] L. Wang, K. Wang, C. Pan, W. Xu, N. Aslam, and A. Nallanathan, "Deep reinforcement learning based dynamic trajectory control for uav-assisted mobile edge computing," *IEEE Transactions on Mobile Computing*, vol. 21, no. 10, pp. 3536–3550, 2021.
- [12] L. Zang, X. Zhang, and B. Guo, "Federated deep reinforcement learning for online task offloading and resource allocation in wpc-mec networks," *IEEE Access*, vol. 10, pp. 9856–9867, 2022.
- [13] Z. Li and Q. Zhu, "Genetic algorithm-based optimization of offloading and resource allocation in mobile-edge computing," *Information*, vol. 11, no. 2, p. 83, 2020.
- [14] A. Ali, S. A. A. Shah, T. Al Shloul, M. Assam, Y. Y. Ghadi, S. Lim, and A. Zia, "Multiobjective harris hawks optimization-based task scheduling in cloud-fog computing," *IEEE Internet of Things Journal*, vol. 11, no. 13, pp. 24 334–24 352, 2024.
- [15] L. Liu, J. Feng, X. Mu, Q. Pei, D. Lan, and M. Xiao, "Asynchronous deep reinforcement learning for collaborative task computing and on-demand resource allocation in vehicular edge computing," *IEEE Transactions on Intelligent Transportation Systems*, vol. 24, no. 12, pp. 15 513–15 526, 2023.
- [16] Z. Zhou, P. Liu, J. Feng, Y. Zhang, S. Mumtaz, and J. Rodriguez, "Computation resource allocation and task assignment optimization in vehicular fog computing: A contract-matching approach," *IEEE Transactions on Vehicular Technology*, vol. 68, no. 4, pp. 3113–3125, 2019.
- [17] Y. Zheng, A. Li, Y. Wen, and G. Wang, "A uav trajectory optimization and task offloading strategy based on hybrid metaheuristic algorithm in mobile edge computing," *Future Internet*, vol. 17, no. 7, p. 300, jul 2025. [Online]. Available: <http://dx.doi.org/10.3390/fi17070300>
- [18] M. Perera, S. Fattah, S. Mistry, and A. Krishna, "Reinforcement learning controlled adaptive pso for task offloading in iiot edge computing," in *Companion Proceedings of the ACM on Web Conference 2025*, ser. WWW '25. ACM, may 2025, p. 1249–1253. [Online]. Available: <http://dx.doi.org/10.1145/3701716.3715559>