

synthesis diagram and simulations of analog controls


1-SIMULATION OF MOTOR CONTROL

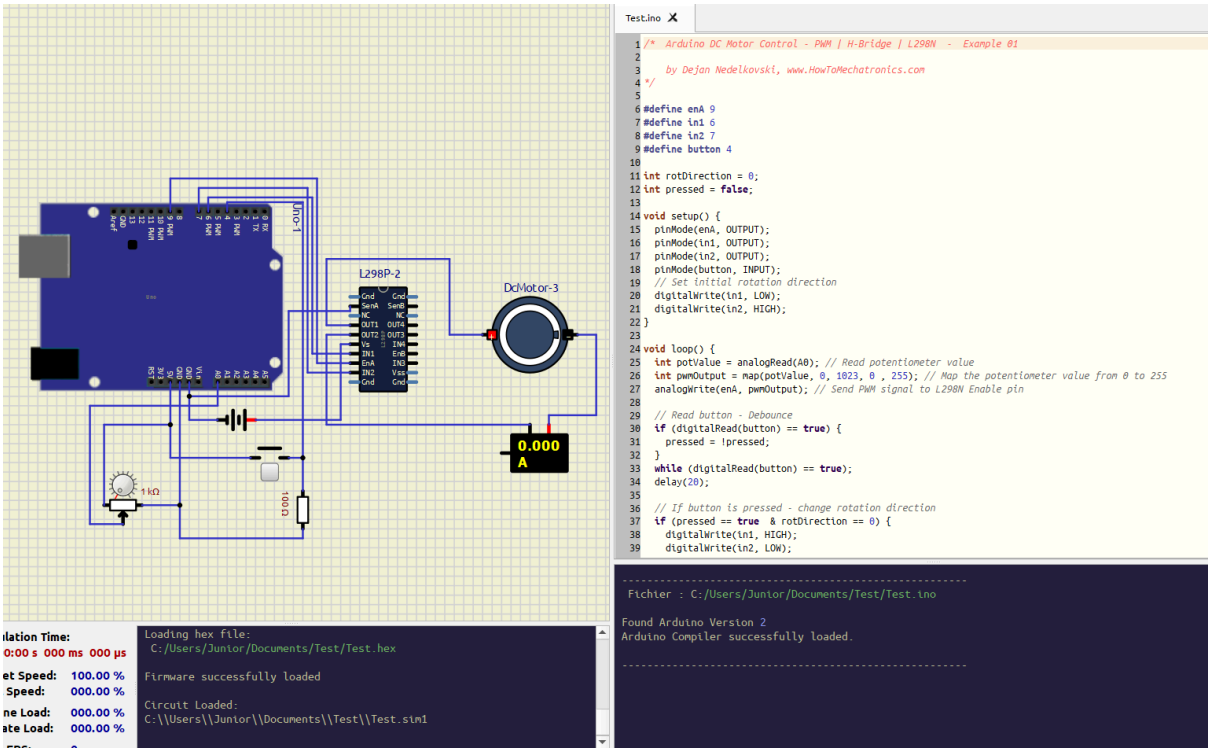

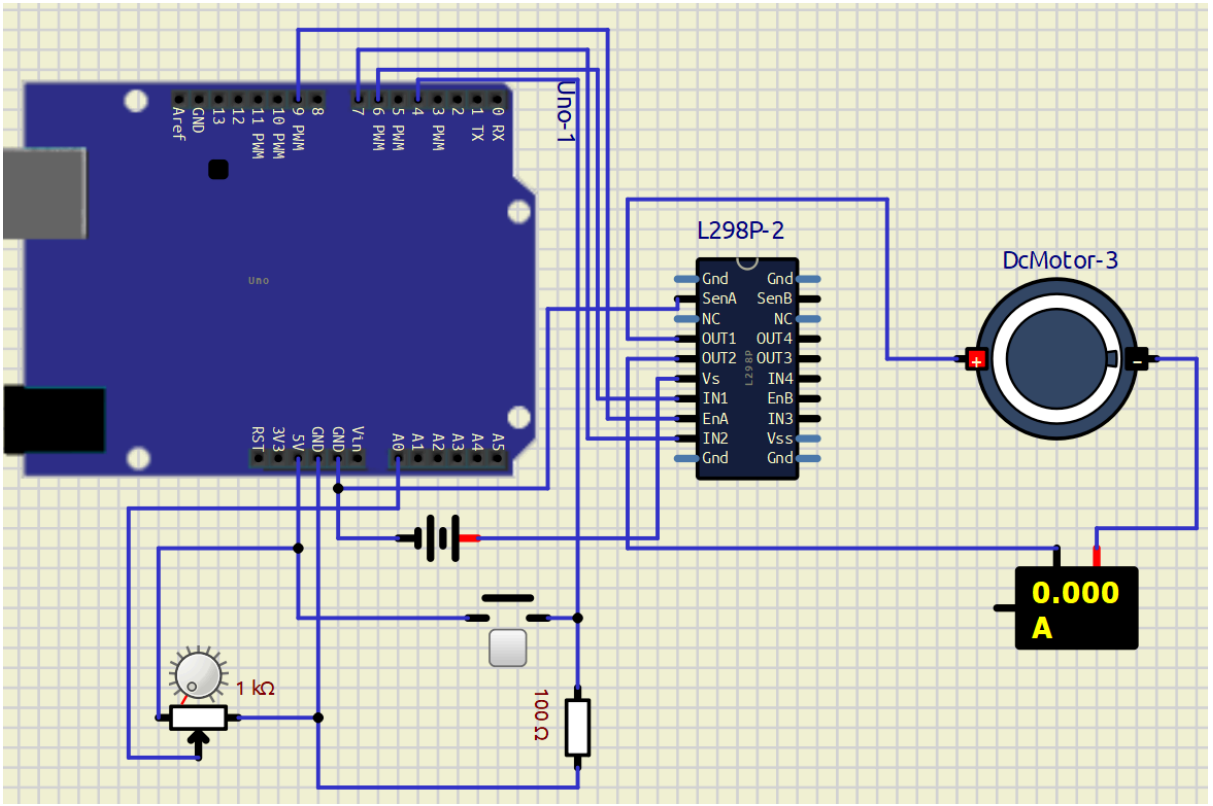

SENSORS

1-CURRENT SENSOR

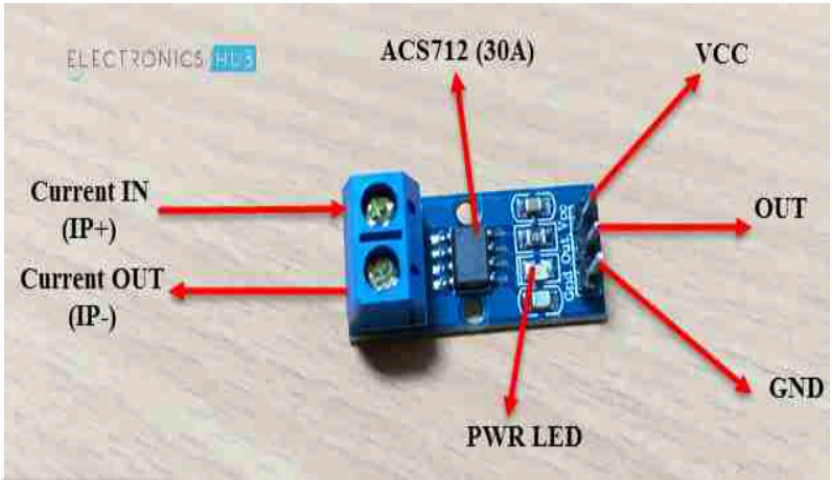




The ACS712 20A current sensor is a current measuring device capable of measuring alternating (AC) and direct (DC) currents up to 20A. It is a practical tool for measuring alternating and direct currents in a wide range of situations and environments.

Characteristics

Current measurement range: -20A to +20A;
Measuring accuracy: +/- 2% at full scale;
Operating voltage: 4.5V to 5.5V;
Signal output: voltage proportional to the measured current;

Operating temperature range: -40°C to +125°C;

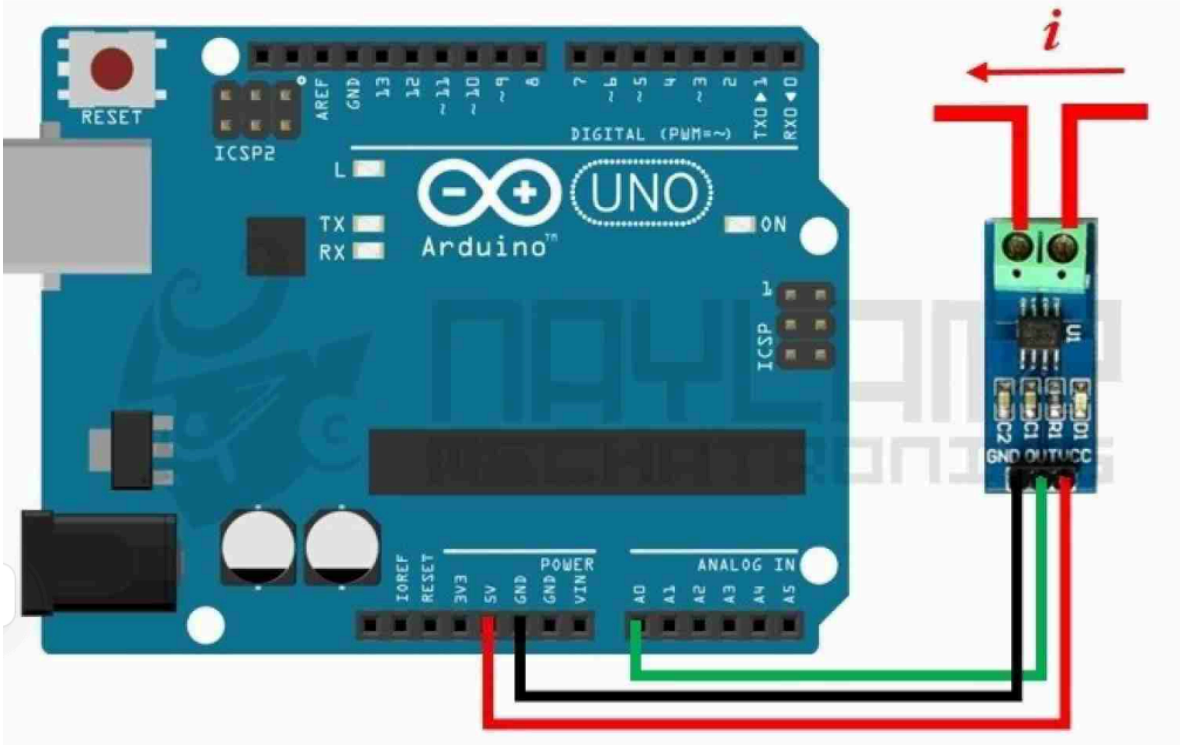

2-SPEED SENSOR

