

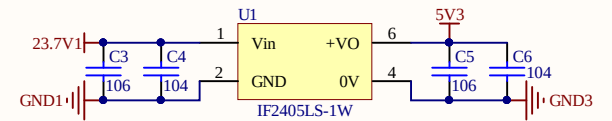
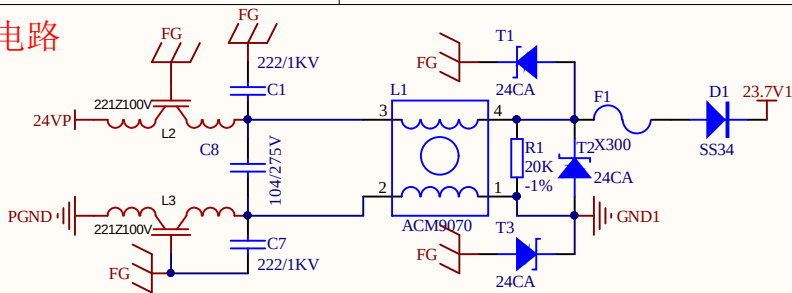





电源转换电路

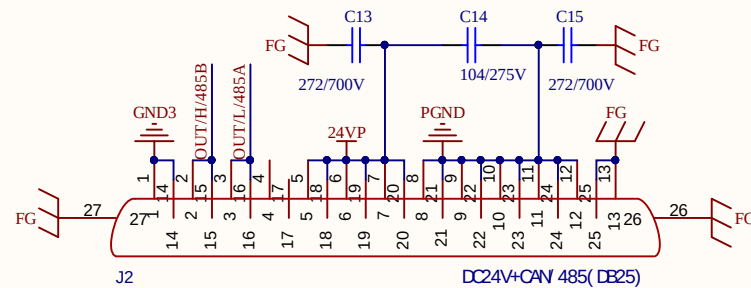

485/CAN +

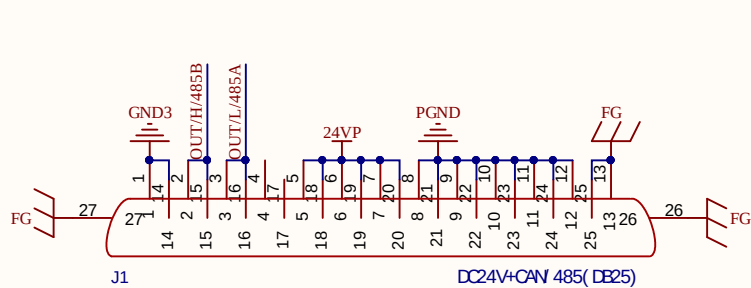

485/CAN

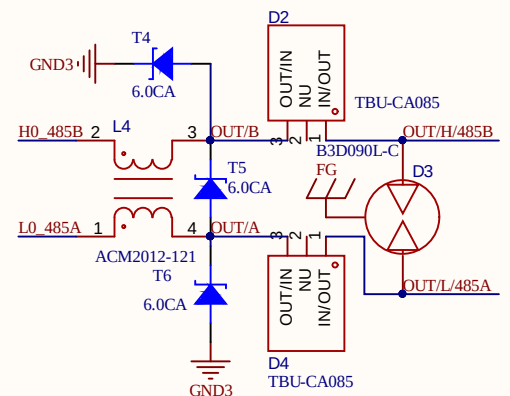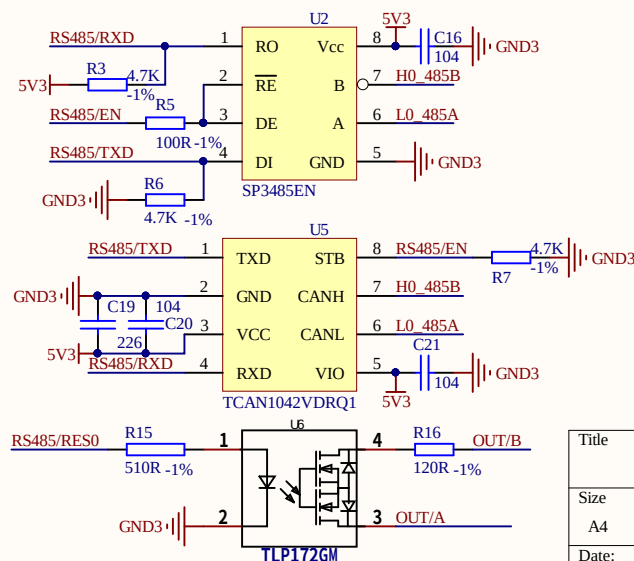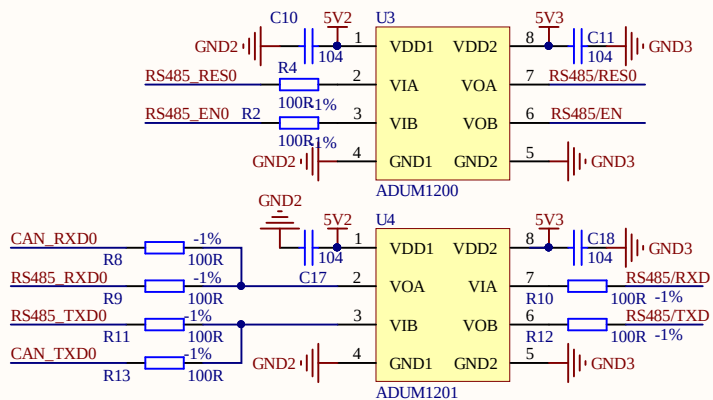

Title		
Size	Number	Revision
A4		
Date:	2026/8/6	Sheet of
File:	E:\... \CVD01(Q2)-GS(DC)26080501\02.0.SchDoc	

The image shows a detailed PCB layout for an MCU circuit. The central component is a microcontroller chip, likely an STM32, with various pins connected to external components. The layout includes several power and ground planes, and is labeled with component values and pin numbers. The components are arranged in a grid-like pattern, with labels for each component and its value. The layout is color-coded, with different colors used for different types of components and connections. The overall design is clean and professional, typical of a high-quality PCB layout.



The top diagram shows the power supply section. It features a 23.7V1 input connected through capacitor C29 (47µF/50V) to the Vin pin of the U8 URB2424V MD-10WR3 module. The module's GND pin is connected to GND1. The +Vo pin is connected to the output of the module, which is also connected to capacitor C26 (100µF/50V). The Trim 0V pin is connected to ground. The output voltage is 24V2. A feedback network consisting of resistors R20 (100K-1%) and R21 (20K) is connected between the output and the EN pin. Capacitor C30 (222/2KV) is connected between GND1 and GND2.

The bottom diagram shows the signal conditioning section. It features a 24V2 input connected through capacitor C32 (106) to the VIN pin of the U10SGM61410 module. The module's BST pin is connected to the output of the module, which is also connected to capacitor C31 (474). The LX pin is connected to the output of the module, which is also connected to capacitor C33 (106). The FB pin is connected to the output of the module, which is also connected to capacitor C34 (104). The EN pin is connected to ground. The output voltage is 5V2. A feedback network consisting of resistors R22 (20K-1%), R23 (100K-1%), and R24 (5K1 -1%) is connected between the output and the EN pin. Capacitors C35 (226), C36 (226), and C37 (226) are connected between the output and ground. Capacitor C38 (104) is connected between the output and GND2.


[illegible]

Title			
Size A3	Number		Revision
Date:	2026/8/6	Sheet	of
File:	EA _\CVD01(Q2)-GS(MCU)2610664-82-0B2.0.SchDoc		


质量流量控制器电源和接口

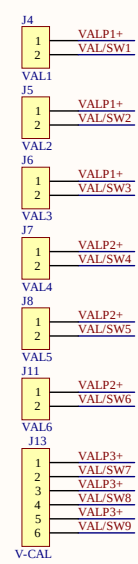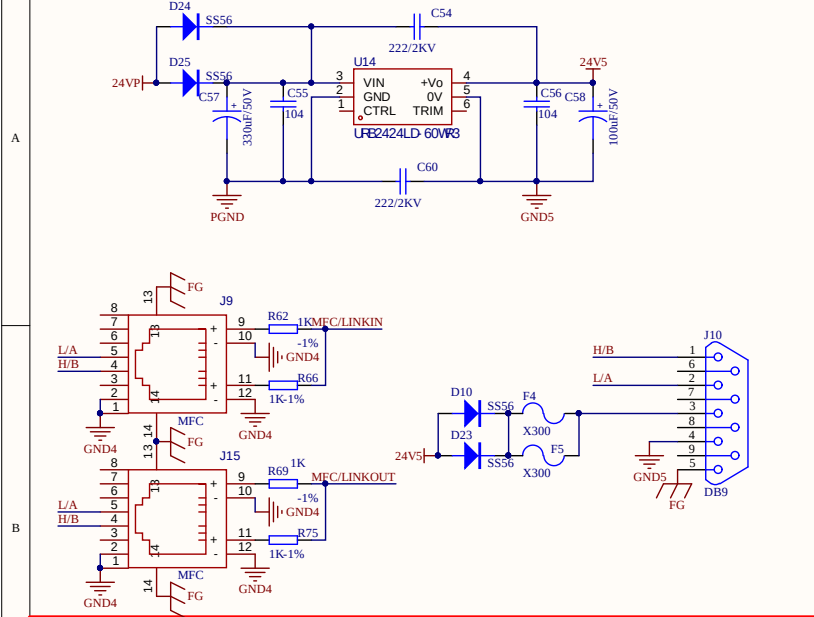

质量流量控制器总线通讯电路

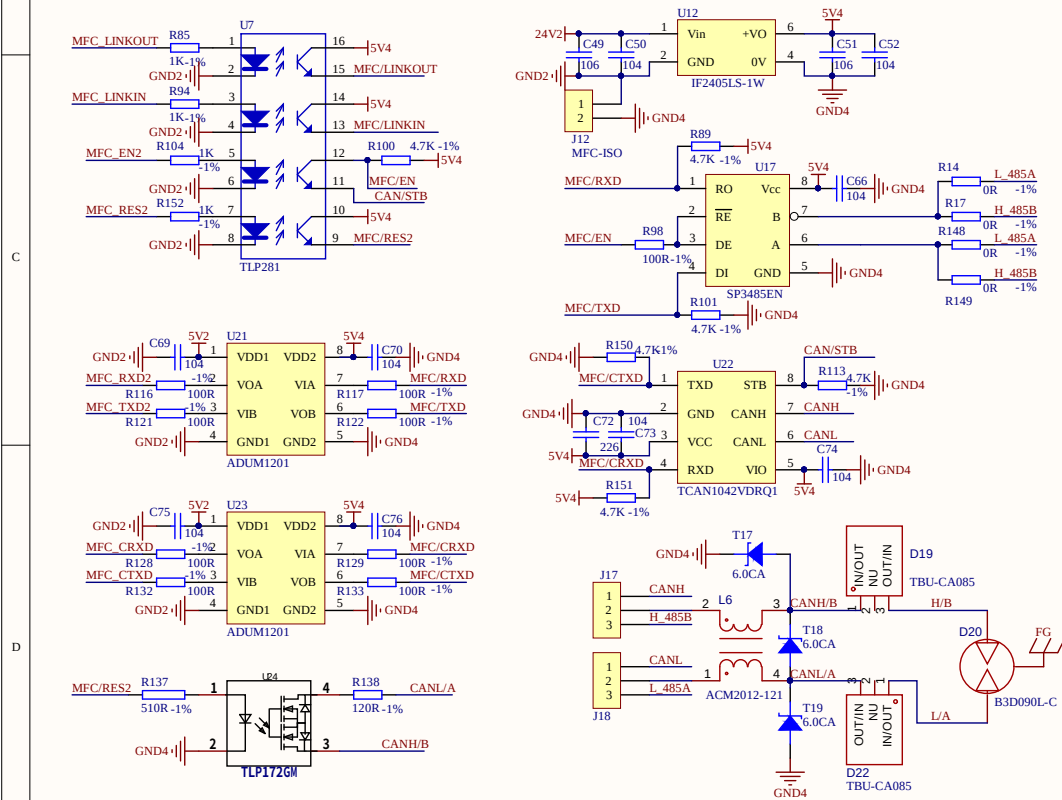

进气开关电磁阀驱动电路

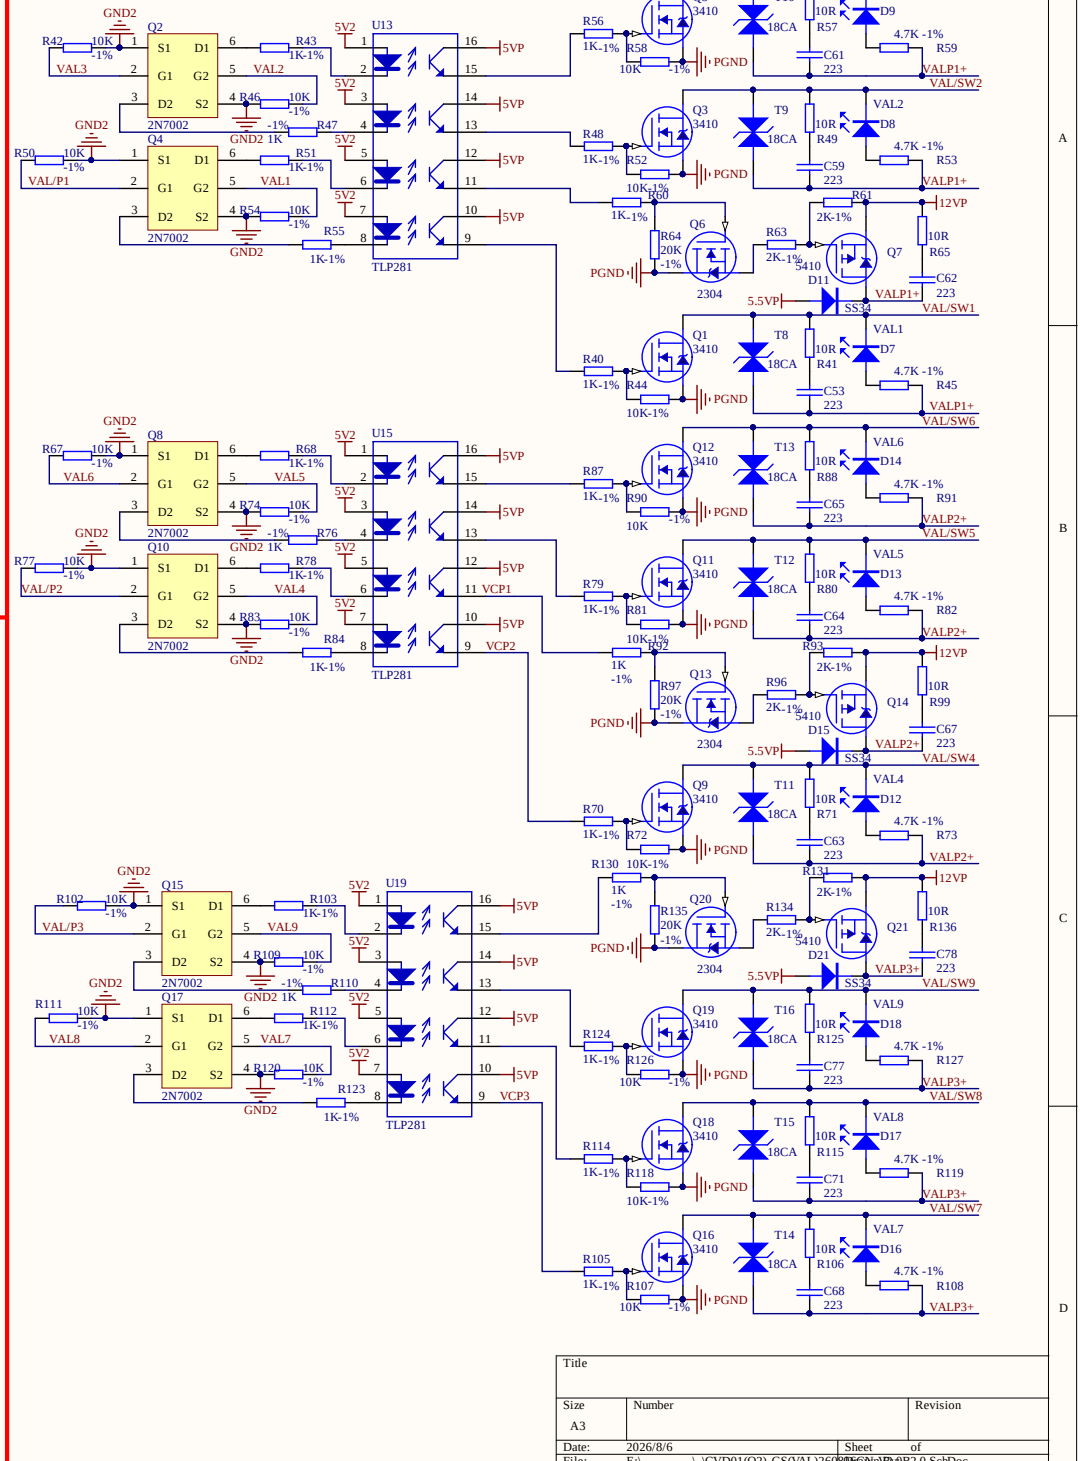

Title					
Size A3	Number				Revision
Date:	2026/8/6			Sheet	of
File:	E:_CVD01(Q2)-GS(VAL)2600-ENG-WZ-B2.0.SchDoc				