



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*30	20250829 -01 ~ 12	2025-08-29
규격(재질)		LOT SIZE(수량)	
0.4*30 AL	Ni 1.5 μ m ~	648 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금 뭉침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금)

8/24
0.4x30
① ㄱ4 ⑤ ㄱ4 ⑨ ㄱ4
② ㄱ4 ⑥ ㄱ4 ⑩ ㄱ4
③ ㄱ4 ⑦ ㄱ4 ⑪ ㄱ4
④ ㄱ4 ⑧ ㄱ4 ⑫ ㄱ4
총 648kg


II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	30.0	-0.1		Reel/Lot	29.969	0.403
2						29.977	0.403
3						29.966	0.402
4						29.947	0.401
5						29.971	0.403
6						29.950	0.402
7						29.983	0.402
8						29.962	0.404
9						29.984	0.402
10						29.997	0.403

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION	Measurement Data	RESULT
1	X-Ray 측정	첨부 : 도금성적서	OK
	Ni 1.5 μ m ~	첨부 : 도금성적서	

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

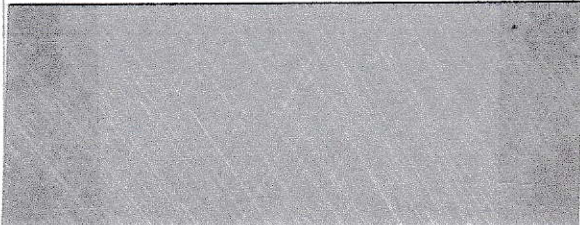NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1. 제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(돌돌 및 벗겨짐) 2. 테이프 시험이 안되는 제품은 니퍼로 90도로 상.하각은후 도금들름이나 벗겨짐이 없을것.		OK

제품도면		우리하이피	작성	승인	종합판정	
		김영란	조승현			
고객		작성	승인		종합판정	

고객명: 신흥SEC


품명 : 0.4X30 초물 LOT NO : 250829-01 DATE : 25.08.29.

No	μm Ni	Ni tolerance
1	2.026	2.024 2.051 2.077
2	2.049	
3	2.077	
4	2.033	
5	2.062	
6	2.056	
Mean	2.051	
S.Dev	0.019	


FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Al}}$

SEC : 15 Sec

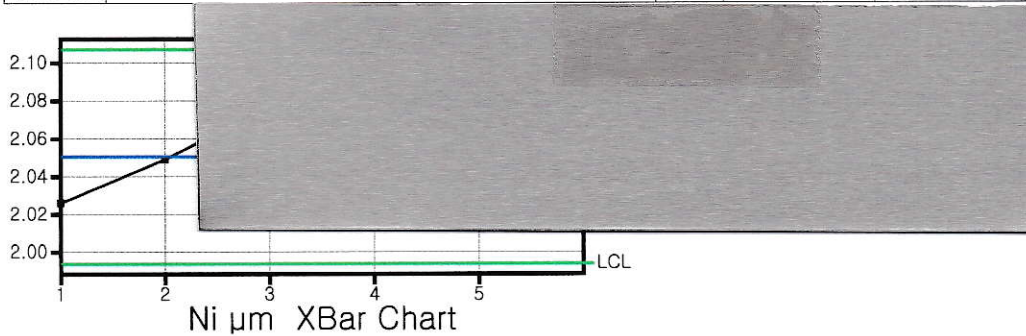

도금원소 : Ni//Al
측정값 개수 6
최대값 2.077
최소값 2.026
범위 0.051
평균값 2.051
표준편차 0.019
변동계수 0.918

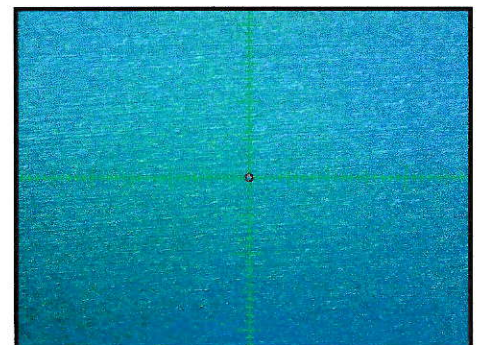

우리하이피(주)

고객명: 신흥SEC


품명 : 0.4X30 초물 LOT NO : 250829-12 DATE : 25.08.29.

No	μm Ni	Ni tolerance		
		2.028	2.067	2.106
1	2.063			
2	2.095			
3	2.056			
4	2.082			
5	2.028			
6	2.079			
Mean	2.067			
S.Dev	0.024			

FUNC: MEASURE
COL : 0.100 mm


Ni
Al

SEC : 15 Sec

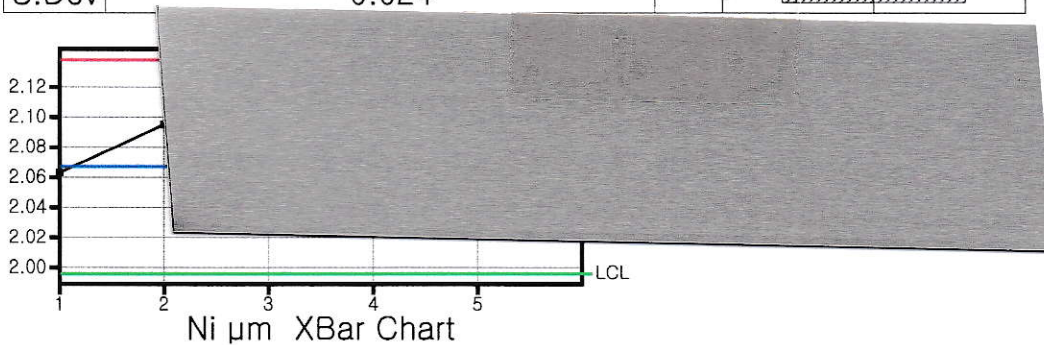

도금원소 : Ni//Al

측정값 개수 6
최대값 2.095
최소값 2.028
범위 0.067
평균값 2.067
표준편차 0.024
변동계수 1.147

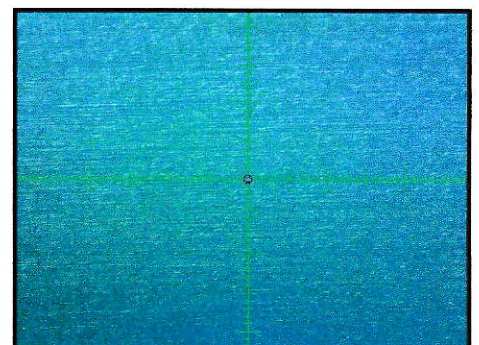

우리하이피(주)