

Quality Assurance Report (신형)

CUSTOMER(고객명)	DESCRIPTION(품명)	PLATING DATE(도금일자)	ISSUED DATE(발행일자)
나담전자	극주 BUSBAR (P)	2026.09.08	2026.09.08
MATERIAL(재질)	SPEC		수량
C1100	Nip: 3.0~4.0 μ m		67 EA

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	V	6	BENT(변형)	0/1	V
2	STAIN(얼룩)	0/1	V	7	NO PLATING(미도금)	0/1	V
3	RUST(부식)	0/1	V	8			
4	CONTAMINATION(오염)	0/1	V	9			
5	PEELING(도금 벗겨짐)	0/1	V	10			


II.DIMENSION INSPECTION

NO	INSPECTION ITEMS	SPECIFICATION	MIN	MAX	AVERAGE	RESULT
11	PLATING THICKNESS (Nip)	Nip: 3.0~4.0 μ m				
12						
13						
14						

도금두께 성적서 참조

III.FUNCTIONAL TEST

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
15	ADHESION TEST (밀착성 시험)	Not permit the peeling		OK
16				

FINAL RESULT	REMARK	PREPARED BY	CHECKED BY	APPROVED BY
		우데스		

나담전자

NiP : 3.0~4.0 μ m

수량: EA

품명: 극주 BUSBAR (P)


LOT NO: 260908-01

일자: 2025.09.08.

No	μ m NiP	NiP tolerance
1	3.280	3.103 3.222 3.340
2	3.190	
3	3.194	
4	3.340	
5	3.104	
Mean	3.222	
S.Dev	0.081	

FUNC: MEASURE
DATE: 2026-09-08
COL : 0.400 mm

$\frac{\text{NiP}}{\text{Cu}}$
SEC : 15 Sec

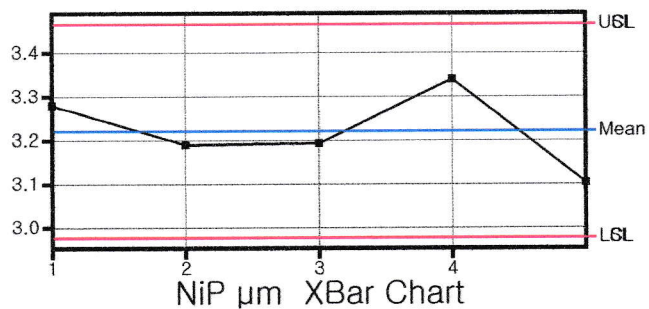

도금원소 : NiP//Cu

측정값 개수 5

최대값 3.340

최소값 3.104

범위 0.236

평균값 3.222

표준편차 0.081

변동계수 2.522

발행처 : 우리하이피

