

Quality Assurance Report (신형)

CUSTOMER(고객명)	DESCRIPTION(품명)	PLATING DATE(도금일자)	ISSUED DATE(발행일자)
나담전자	NQ6e BUSBAR NEGATIVE 2.0T	260820-01	2026.08.20
MATERIAL(재질)	SPEC		수량
C1100	Ni: 1.0~ μm Sn:1.0~4.0 μm		362 EA

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	V	6	BENT(변형)	0/1	V
2	STAIN(얼룩)	0/1	V	7	NO PLATING(미도금)	0/1	V
3	RUST(부식)	0/1	V	8			
4	CONTAMINATION(오염)	0/1	V	9			
5	PEELING(도금 벗겨짐)	0/1	V	10			


II.DIMENSION INSPECTION

NO	INSPECTION ITEMS	SPECIFICATION	MIN	MAX	AVERAGE	RESULT
11	PLATING THICKNESS (Ni)	Ni: 1.0~ μm				
12	PLATING THICKNESS (Sn)	Sn:1.0~4.0 μm				
13						
14						

도금두께 성적서 참조



III.FUNCTIONAL TEST

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
15	ADHESION TEST (밀착성 시험)	Not permit the peeling		OK
16				

FINAL RESULT	REMARK	PREPARED BY	CHECKED BY	APPROVED BY
		우데스		

나담전자 Ni: 1.0~ μm Sn:1.0~4.0 μm 수량 : EA



품명: NQ6e BUSBAR NEGATIVE 2.0T LOT NO: 260820-01 일자: 2026.08.20.

No	μm Sn	μm Ni	Sn tolerance		
			2.386	2.468	2.549
1	2.386	2.192			
2	2.500	1.810			
3	2.518	1.866			
4	2.421	1.938			
5	2.513	1.907			
Mean	2.468	1.943			
S.Dev	0.054	0.132			

FUNC: MEASURE
DATE: 2026-08-20
COL : 1.000 mm


$\frac{\text{Sn}}{\text{Ni}}$
 $\frac{\text{Ni}}{\text{Cu}}$

SEC : 15 Sec

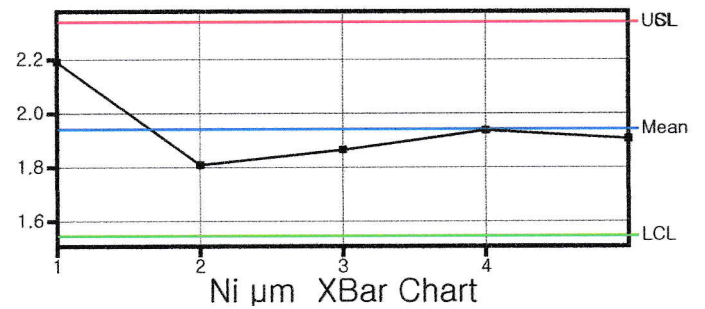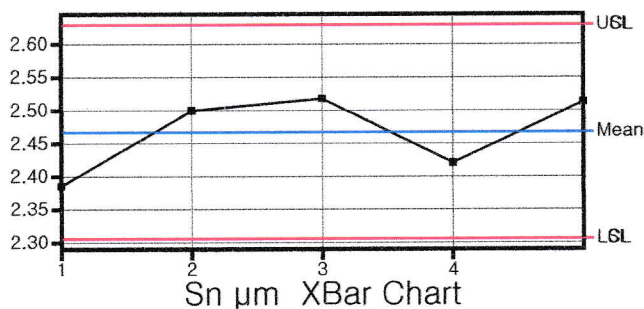

도금원소 : Sn/Ni//Cu

측정값 개수	5	5
최대값	2.518	2.192
최소값	2.386	1.810
범위	0.132	0.382
평균값	2.468	1.943
표준편차	0.054	0.132
변동계수	2.181	6.788

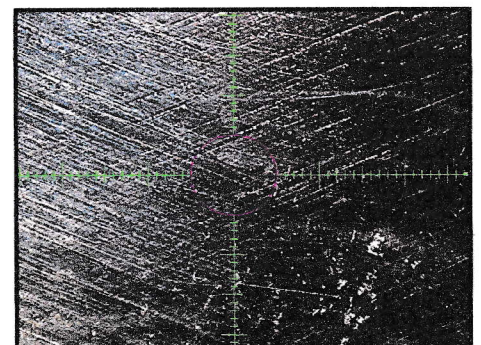

발행처 : 우리하이피