

재	작성 (Prepared)	검토 (Checked)	승인 (Approved)	Hanbit T&I				검사 성적서 Inspection Report				재	작성 (Prepared)	검토 (Checked)	승인 (Approved)																																																																																																			
	김영란		조승현																																																																																																															
고객명 (Customer)				한빛티앤아이		품명 (Part Name)		Heat Spreader				납품서 NO (Order No.)																																																																																																						
모델 (Model)				27mm Body		모델 NO. (Model NO.)		0850618HS				관리번호 (Report NO.)																																																																																																						
재질 (Material)						도면 REV.NO																																																																																																												
검사 단계				수입검사		구분 (Classification)		☐ 개발실험 (Development) ☒ 양산중 (Production) ☐ 설변 (Design Change) ☐ 금형재제작 (Mold Rebuilt) ☐ 기타 (Etc)																																																																																																										
측정 단위 : mm (Measuring Unit : mm)								특기 사항 (Comments)																																																																																																										
								종합 판정 (Judgement)		☒ 적합품 (OK Part) ☐ 부적합품 (NG Part)																																																																																																								
								LOT 크기 (Quantity)		25,790 pcs																																																																																																								
								검사 일자 (Date of Inspection)		2026.09.02.																																																																																																								
								검사원 (Inspector)		우리하이피 나우인																																																																																																								
								측정기 범례	약어 (Abbreviation)		측정기명 (Measuring Instrument)																																																																																																							
									TM	Toolmakers Microscope																																																																																																								
									DC	Digimatic Calipers																																																																																																								
									PG	Pin Gauge																																																																																																								
									RD	reflection densitometer																																																																																																								
MM	Micro Meter																																																																																																																	
HG	Height Gauge																																																																																																																	
TC	Thickness&Coating Measurement System																																																																																																																	
DP	Dyne pen																																																																																																																	
<table border="1"> <thead> <tr> <th>순번 (NO)</th> <th>검사 항목 (Inspection Method)</th> <th>규격 (Specification)</th> <th>측정기 (Measuring Instrument)</th> <th>x1 (Sample 1)</th> <th>x2 (Sample 2)</th> <th>x3 (Sample 3)</th> <th>x4 (Sample 4)</th> <th>x5 (Sample 5)</th> <th>Sample SIZE</th> <th>판정 (Judgement)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>외관</td> <td>얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>500</td> <td>OK</td> </tr> <tr> <td>2</td> <td>도금두께</td> <td>3.0 ~ 6.0 μm</td> <td>TC</td> <td>3.280</td> <td>3.315</td> <td>3.316</td> <td>3.254</td> <td>3.282</td> <td>5</td> <td>OK</td> </tr> <tr> <td>3</td> <td>Reflection Density</td> <td>0.65 ~ 0.95</td> <td>RD</td> <td>0.87</td> <td>0.86</td> <td>0.89</td> <td>0.88</td> <td>0.85</td> <td>5</td> <td>OK</td> </tr> <tr> <td>4</td> <td>에너지펜 TEST NO.36</td> <td>끊김,뭉침없을것</td> <td>DP</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>5</td> <td>CROSS Cutting</td> <td>개별 격자 1mm 이 내 20% 이하일것</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>																순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)	1	외관	얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK	2	도금두께	3.0 ~ 6.0 μm	TC	3.280	3.315	3.316	3.254	3.282	5	OK	3	Reflection Density	0.65 ~ 0.95	RD	0.87	0.86	0.89	0.88	0.85	5	OK	4	에너지펜 TEST NO.36	끊김,뭉침없을것	DP	OK	OK	OK	OK	OK	5	OK	5	CROSS Cutting	개별 격자 1mm 이 내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK	6											7											8										
순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)																																																																																																								
1	외관	얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK																																																																																																								
2	도금두께	3.0 ~ 6.0 μm	TC	3.280	3.315	3.316	3.254	3.282	5	OK																																																																																																								
3	Reflection Density	0.65 ~ 0.95	RD	0.87	0.86	0.89	0.88	0.85	5	OK																																																																																																								
4	에너지펜 TEST NO.36	끊김,뭉침없을것	DP	OK	OK	OK	OK	OK	5	OK																																																																																																								
5	CROSS Cutting	개별 격자 1mm 이 내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK																																																																																																								
6																																																																																																																		
7																																																																																																																		
8																																																																																																																		

고객명: 한빛티앤아이


품명 : Heat Spreader 27mm LOT NO : 260902-01 DATE : 26.09.02.

No	μm Ni
1	3.280
2	3.315
3	3.316
4	3.254
5	3.282
Mean	3.289
S.Dev	0.026

FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Cu}}$

SEC : 20 Sec

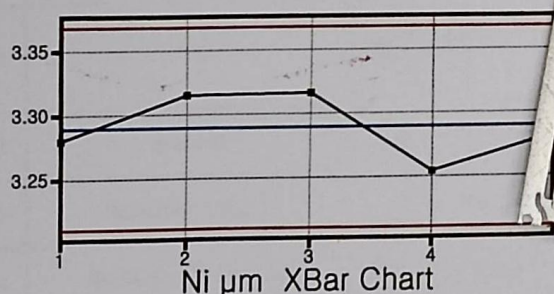

도금원소 : Ni//Cu

측정값 개수 5

최대값 3.316

최소값 3.254

범위 0.062

평균값 3.289

표준편차 0.026

변동계수 0.798

우리하이피(주)

