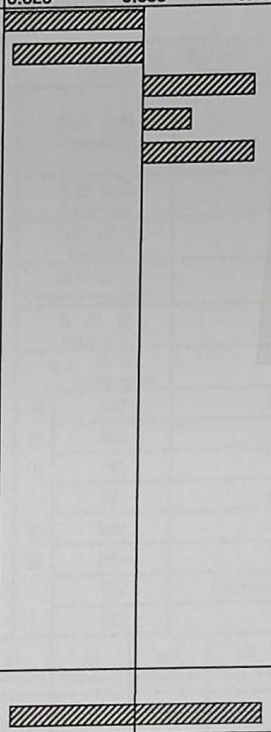


작성 (Prepared)	검토 (Checked)	승인 (Approved)	검 사 성 적 서 Inspection Report				작성 (Prepared)	검토 (Checked)	승인 (Approved)																																																																																																			
재	심문경	조승현	Hanbit T&I				재																																																																																																					
고객명 (Customer)			한빛티앤아이	품명 (Part Name)	Heat Spreader		납품서NO (Order No.)																																																																																																					
모델 (Model)			18.6mm Body	모델 NO. (Model No.)	0850283HS		관리번호 (Report No.)																																																																																																					
재질 (Material)			도면 REV.NO																																																																																																									
검사 단계			수입검사	구분 (Classification)	☒ 개발신설 (Development) ☒ 양산중 (Production) ☐ 설변 (Design Change) ☐ 금형재제작 (Mold Rebuild) ☐ 기타 (Etc)																																																																																																							
측정 단위 : mm (Measuring Unit : mm)				특기 사항 (Comments)																																																																																																								
				종합 판정 (Judgement)		☒ 적합품 (OK Part) ☐ 부적합품 (NG Part)																																																																																																						
				LOT 크기 (Quantity)		85,580 pcs																																																																																																						
				검사 일자 (Date of Inspection)		2026.09.18.																																																																																																						
				검사원 (Inspector)		우리하이피 심문경																																																																																																						
				약어 (Abbreviation)		측정기명 (Measuring Instrument)																																																																																																						
측정기 범례	TM	Toolmakers Microscope																																																																																																										
	DC	Digimatic Calipers																																																																																																										
	PG	Pin Gauge																																																																																																										
	RD	reflection densitometer																																																																																																										
	MM	Micro Meter																																																																																																										
	HG	Height Gauge																																																																																																										
TC	Thickness&Coating Measurement System																																																																																																											
DP	Dyne pen																																																																																																											
<table border="1"> <thead> <tr> <th>순번 (NO)</th> <th>검사 항목 (Inspection Method)</th> <th>규격 (Specification)</th> <th>측정기 (Measuring Instrument)</th> <th>x1 (Sample 1)</th> <th>x2 (Sample 2)</th> <th>x3 (Sample 3)</th> <th>x4 (Sample 4)</th> <th>x5 (Sample 5)</th> <th>Sample SIZE</th> <th>판정 (Judgement)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>외관</td> <td>얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>500</td> <td>OK</td> </tr> <tr> <td>2</td> <td>도금두께</td> <td>3.0 ~ 6.0 μm</td> <td>TC</td> <td>3.326</td> <td>3.328</td> <td>3.378</td> <td>3.365</td> <td>3.378</td> <td>5</td> <td>OK</td> </tr> <tr> <td>3</td> <td>Reflection Density</td> <td>0.65 ~ 0.95</td> <td>RD</td> <td>0.81</td> <td>0.80</td> <td>0.82</td> <td>0.83</td> <td>0.81</td> <td>5</td> <td>OK</td> </tr> <tr> <td>4</td> <td>에너지펜 TEST NO.36</td> <td>긁김,뭉침없을것</td> <td>DP</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>5</td> <td>CROSS Cutting</td> <td>개별 격자 1mm 이내 20% 이하일것</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>										순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)	1	외관	얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK	2	도금두께	3.0 ~ 6.0 μm	TC	3.326	3.328	3.378	3.365	3.378	5	OK	3	Reflection Density	0.65 ~ 0.95	RD	0.81	0.80	0.82	0.83	0.81	5	OK	4	에너지펜 TEST NO.36	긁김,뭉침없을것	DP	OK	OK	OK	OK	OK	5	OK	5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK	6											7											8										
순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)																																																																																																		
1	외관	얼룩,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK																																																																																																		
2	도금두께	3.0 ~ 6.0 μm	TC	3.326	3.328	3.378	3.365	3.378	5	OK																																																																																																		
3	Reflection Density	0.65 ~ 0.95	RD	0.81	0.80	0.82	0.83	0.81	5	OK																																																																																																		
4	에너지펜 TEST NO.36	긁김,뭉침없을것	DP	OK	OK	OK	OK	OK	5	OK																																																																																																		
5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK																																																																																																		
6																																																																																																												
7																																																																																																												
8																																																																																																												

고객명: 한빛티앤아이



품명 : Heat Spreader 18.6mm 0.5T LOT NO : 260918-01 DATE : 26.09.18.

No	μm Ni	Ni tolerance		
		3.326	3.355	3.384
1	3.326			
2	3.328			
3	3.378			
4	3.365			
5	3.378			
Mean	3.355			
S.Dev	0.026			

FUNC: MEASURE
COL : 0.100 mm

Ni
Cu

SEC : 20 Sec

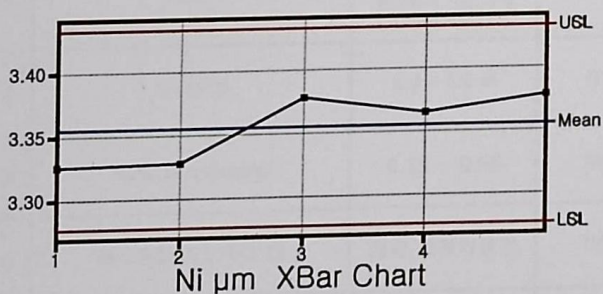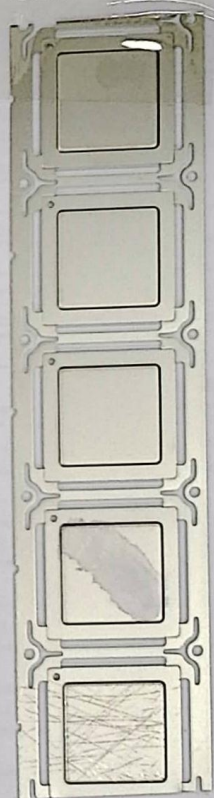

도금원소 : Ni//Cu
측정값 개수 5
최대값 3.378
최소값 3.326
범위 0.052
평균값 3.355
표준편차 0.026
변동계수 0.778

우리하이피(주)

