

재	작성 (Prepared)	검토 (Checked)	승인 (Approved)	Hanbit T&I			검 사 성 적 서 Inspection Report			결 재	작성 (Prepared)	검토 (Checked)	승인 (Approved)																																																																																																			
				재	심문경	조승현																																																																																																										
고객명 (Customer)	한빛티앤아이			품명 (Part Name)	Heat Spreader			납품서NO (Order No.)																																																																																																								
모델 (Model)	18.6mm Body			모델 NO. (Model NO.)	0850283HS			관리번호 (Report No.)																																																																																																								
재질 (Material)				도면 REV.NO																																																																																																												
검사 단계	수입검사			구분 (Classification)	☐ 개발신설 (Development) ☒ 양산중 (Production) ☐ 설변 (Design Change) ☐ 금형재제작 (Mold Rebuilt) ☐ 기타 (Etc)																																																																																																											
측정 단위 : mm (Measuring Unit : mm)					특기 사항 (Comments)																																																																																																											
					종합 판정 (Judgement)		☒ 적합품 (OK Part) ☐ 부적합품 (NG Part)																																																																																																									
					LOT 크기 (Quantity)		83,550 pcs																																																																																																									
					검사 일자 (Date of Inspection)		2026.09. 21.																																																																																																									
					검사원 (Inspector)		우리하이피 심문경																																																																																																									
					측정 기 별 레	약어 (Abbreviation)		측정기명 (Measuring Instrument)																																																																																																								
						TM		Toolmakers Microscope																																																																																																								
						DC		Digimatic Calipers																																																																																																								
						PG		Pin Gauge																																																																																																								
						RD		reflection densitometer																																																																																																								
MM		Micro Meter																																																																																																														
HG		Height Gauge																																																																																																														
TC		Thickness&Coating Measurement System																																																																																																														
DP		Dyne pen																																																																																																														
하단은 고객 기록란 <table border="1"> <thead> <tr> <th>순번 (NO)</th> <th>검 사 항 목 (Inspection Method)</th> <th>규 격 (Specification)</th> <th>측 정 기 (Measuring Instrument)</th> <th>x1 (Sample 1)</th> <th>x2 (Sample 2)</th> <th>x3 (Sample 3)</th> <th>x4 (Sample 4)</th> <th>x5 (Sample 5)</th> <th>Sample SIZE</th> <th>판 정 (Judgement)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>외관</td> <td>일록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>500</td> <td>OK</td> </tr> <tr> <td>2</td> <td>도금두께</td> <td>3.0 ~ 6.0 μm</td> <td>TC</td> <td>3.286</td> <td>3.323</td> <td>3.306</td> <td>3.342</td> <td>3.279</td> <td>5</td> <td>OK</td> </tr> <tr> <td>3</td> <td>Reflection Density</td> <td>0.65 ~ 0.95</td> <td>RD</td> <td>0.83</td> <td>0.81</td> <td>0.81</td> <td>0.84</td> <td>0.82</td> <td>5</td> <td>OK</td> </tr> <tr> <td>4</td> <td>에너지펜 TEST NO.36</td> <td>균질,응침없을것</td> <td>DP</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>5</td> <td>CROSS Cutting</td> <td>개별 격자 1mm 이내 20% 이하일것</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>														순번 (NO)	검 사 항 목 (Inspection Method)	규 격 (Specification)	측 정 기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판 정 (Judgement)	1	외관	일록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK	2	도금두께	3.0 ~ 6.0 μm	TC	3.286	3.323	3.306	3.342	3.279	5	OK	3	Reflection Density	0.65 ~ 0.95	RD	0.83	0.81	0.81	0.84	0.82	5	OK	4	에너지펜 TEST NO.36	균질,응침없을것	DP	OK	OK	OK	OK	OK	5	OK	5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK	6											7											8										
순번 (NO)	검 사 항 목 (Inspection Method)	규 격 (Specification)	측 정 기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판 정 (Judgement)																																																																																																						
1	외관	일록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK																																																																																																						
2	도금두께	3.0 ~ 6.0 μm	TC	3.286	3.323	3.306	3.342	3.279	5	OK																																																																																																						
3	Reflection Density	0.65 ~ 0.95	RD	0.83	0.81	0.81	0.84	0.82	5	OK																																																																																																						
4	에너지펜 TEST NO.36	균질,응침없을것	DP	OK	OK	OK	OK	OK	5	OK																																																																																																						
5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK																																																																																																						
6																																																																																																																
7																																																																																																																
8																																																																																																																

고객명: 한빛티앤아이



품명 : Heat Spreader 18.6mm 0.5T LOT NO : 260921-01 DATE : 26.09.21.

No	μm Ni	Ni tolerance	
		3.272	3.307 3.342
1	3.286		
2	3.323		
3	3.306		
4	3.342		
5	3.279		
Mean	3.307		
S.Dev	0.026		

FUNC: MEASURE
COL : 0.100 mm

Ni
Cu

SEC : 20 Sec

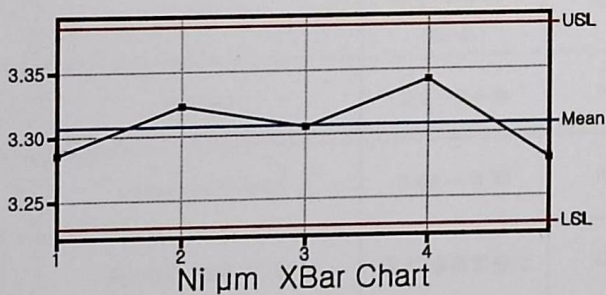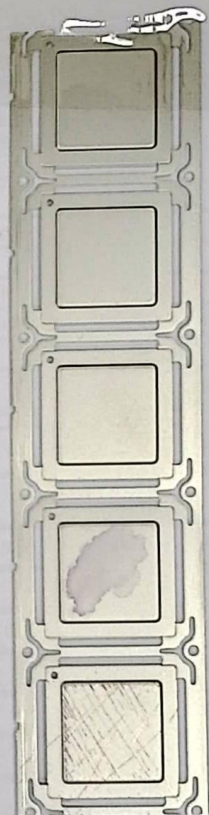

도금원소 : Ni//Cu
측정값 개수 5
최대값 3.342
최소값 3.279
범위 0.063
평균값 3.307
표준편차 0.026
변동계수 0.787

우리하이피(주)

