

재 제	작성 (Prepared)	검토 (Checked)	승인 (Approved)	검 사 성 적 서 Inspection Report			결 재	작성 (Prepared)	검토 (Checked)	승인 (Approved)																																																																																																			
	심문경		조승현																																																																																																										
고객명 (Customer)		한빛티앤아이		품명 (Part Name)	Heat Spreader		납품서NO (Order No.)																																																																																																						
모델 (Model)		18.6mm Body		모델 NO. (Model NO.)	0850283HS		관리번호 (Report NO.)																																																																																																						
재질 (Material)				도면 REV.NO																																																																																																									
검사 단계		수입검사		구분 (Classification)	개발 생산 설계 금형재제작 리타																																																																																																								
측정 단위 : mm (Measuring Unit : mm)				특기 사항 (Comments)																																																																																																									
				종합 판정 (Judgement)		☒ 적합품 (OK Part) ☐ 부적합품 (NG Part)																																																																																																							
				LOT 크기 (Quantity)		23,000 pcs																																																																																																							
				검사 일자 (Date of Inspection)		2026.09. 23.																																																																																																							
				검사원 (Inspector)		우리하이피 심문경																																																																																																							
				측 정 기 법 례	약어 (Abbreviation)	측정기명 (Measuring Instrument)																																																																																																							
					TM	Toolmakers Microscope																																																																																																							
					DC	Digimatic Calipers																																																																																																							
					PG	Pin Gauge																																																																																																							
					RD	reflection densitometer																																																																																																							
MM	Micro Meter																																																																																																												
HG	Height Gauge																																																																																																												
TC	Thickness&Coating Measurement System																																																																																																												
DP	Dyne pen																																																																																																												
하단은 고객 기록란 <table border="1"> <thead> <tr> <th>순번 (NO)</th> <th>검사 항목 (Inspection Method)</th> <th>규격 (Specification)</th> <th>측정기 (Measuring Instrument)</th> <th>x1 (Sample 1)</th> <th>x2 (Sample 2)</th> <th>x3 (Sample 3)</th> <th>x4 (Sample 4)</th> <th>x5 (Sample 5)</th> <th>Sample SIZE</th> <th>판정 (Judgement)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>외관</td> <td>압록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>500</td> <td>OK</td> </tr> <tr> <td>2</td> <td>도금두께</td> <td>3.0 ~ 6.0 μm</td> <td>TC</td> <td>3.340</td> <td>3.359</td> <td>3.307</td> <td>3.298</td> <td>3.324</td> <td>5</td> <td>OK</td> </tr> <tr> <td>3</td> <td>Reflection Density</td> <td>0.65 ~ 0.95</td> <td>RD</td> <td>0.78</td> <td>0.81</td> <td>0.79</td> <td>0.80</td> <td>0.79</td> <td>5</td> <td>OK</td> </tr> <tr> <td>4</td> <td>에너지펜 TEST NO.36</td> <td>균질,문짐없을것</td> <td>DP</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>5</td> <td>CROSS Cutting</td> <td>개별 격자 1mm 이내 20% 이하일것</td> <td>육안</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>5</td> <td>OK</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>											순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)	1	외관	압록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK	2	도금두께	3.0 ~ 6.0 μm	TC	3.340	3.359	3.307	3.298	3.324	5	OK	3	Reflection Density	0.65 ~ 0.95	RD	0.78	0.81	0.79	0.80	0.79	5	OK	4	에너지펜 TEST NO.36	균질,문짐없을것	DP	OK	OK	OK	OK	OK	5	OK	5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK	6											7											8										
순번 (NO)	검사 항목 (Inspection Method)	규격 (Specification)	측정기 (Measuring Instrument)	x1 (Sample 1)	x2 (Sample 2)	x3 (Sample 3)	x4 (Sample 4)	x5 (Sample 5)	Sample SIZE	판정 (Judgement)																																																																																																			
1	외관	압록,변색,이물 없을것 KS A ISO 2859-1 일반검사 수준 G-2 AQL=0.1	육안	OK	OK	OK	OK	OK	500	OK																																																																																																			
2	도금두께	3.0 ~ 6.0 μm	TC	3.340	3.359	3.307	3.298	3.324	5	OK																																																																																																			
3	Reflection Density	0.65 ~ 0.95	RD	0.78	0.81	0.79	0.80	0.79	5	OK																																																																																																			
4	에너지펜 TEST NO.36	균질,문짐없을것	DP	OK	OK	OK	OK	OK	5	OK																																																																																																			
5	CROSS Cutting	개별 격자 1mm 이내 20% 이하일것	육안	OK	OK	OK	OK	OK	5	OK																																																																																																			
6																																																																																																													
7																																																																																																													
8																																																																																																													



고객명: 한빛티앤아이

품명 : Heat Spreader 18.6mm 0.5T LOT NO : 260923-01 DATE : 26.09. 23

No	μm Ni	Ni tolerance 3.292 3.326 3.359
1	3.340	
2	3.359	
3	3.307	
4	3.298	
5	3.324	
Mean	3.326	
S.Dev	0.025	

FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Cu}}$
SEC : 20 Sec

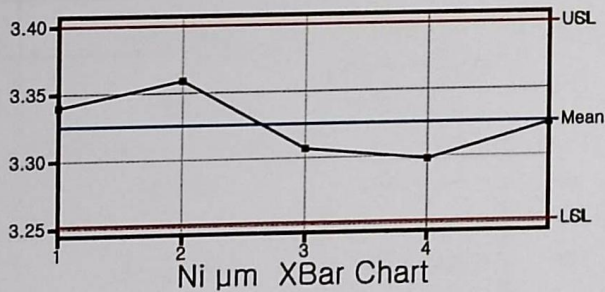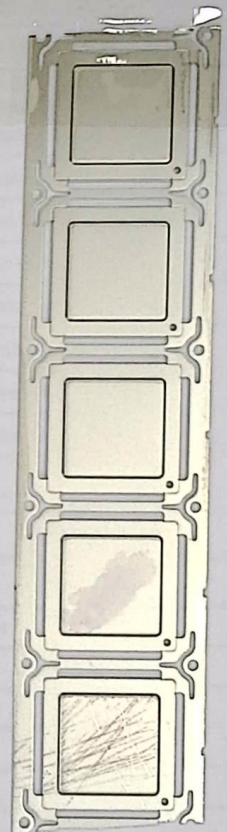

도금원소 : Ni//Cu
측정값 개수 5
최대값 3.359
최소값 3.298
범위 0.061
평균값 3.326
표준편차 0.025
변동계수 0.742

우리하이피(주)

