



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
호연이엔지	0.1*55	20260916 -01	2026-09-16
규격(재질)		LOT SIZE(수량)	
0.1*55	Ni 1.0 μ m~3.0 μ m	12 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Shipping, c=0)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)	0/1	OK
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)	0/1	OK
3	RUST(부식)	0/1	OK	8	LUMP(도금물집)	0/1	OK
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)	0/1	OK
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금버)	0/1	OK


II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Shipping, c=0)


NO	항목/구분	SPEC			검사주기	우리하이피		고객		판정
		규격	하한(-)	상한(+)		1차	2차	1차	2차	
1	전폭	55.0	-0.1		Reel/Lot	54.993				OK
2										
3										
4										
5										
6										
7										
8										
9										
10										

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정	Ni 1.0 μ m~3.0 μ m	첨부 : 도금성적서	OK
			첨부 : 도금성적서	

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

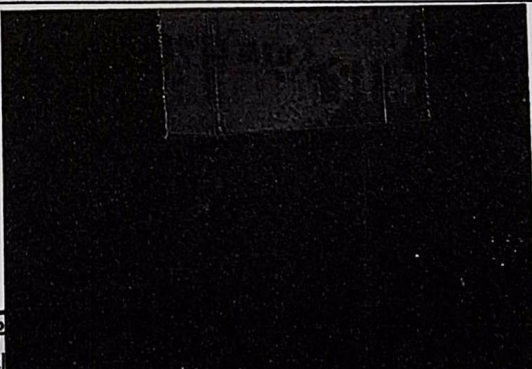NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(들뜸 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상.하각은후 도금들뜸 이나 벗겨짐이 없을것.		OK

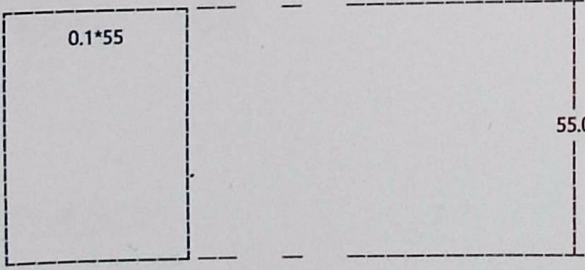제품도면		우리하이피	심문경	조승현	판정	2026-09-16 우리하이피(주) Q.C
		고객	작성	승인	종합판정	

고객명: 호연이엔지


품명 : 0.1X55 초물 LOT NO : 260916-01 DATE : 26.09.16.

No	μm Ni	Ni tolerance
1	1.324	1.275 1.305 1.335
2	1.296	
3	1.275	
4	1.322	
5	1.308	
Mean	1.305	
S.Dev	0.020	


FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{SS}}$

SEC : 15 Sec

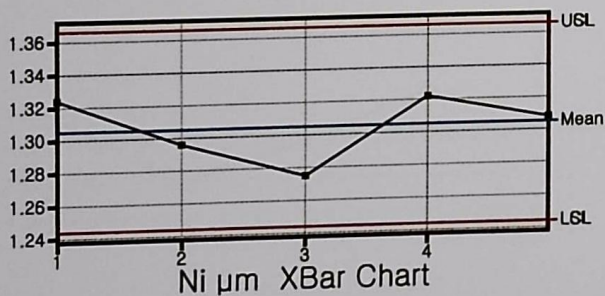

도금원소 : Ni//SS
측정값 개수 5
최대값 1.324
최소값 1.275
범위 0.049
평균값 1.305
표준편차 0.020
변동계수 1.552

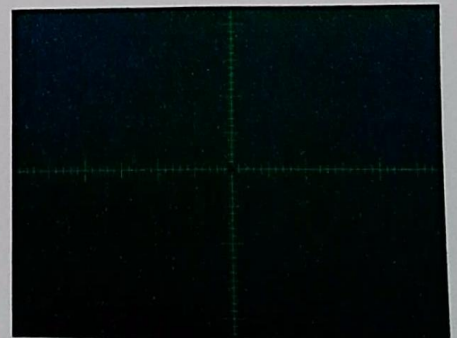

우리하이피

고객명: 호연이엔지


품명 : 0.1X55 종물 LOT NO : 260916-01 DATE : 26.09.16.

No	μm Ni	Ni tolerance		
		1.299	1.327	1.356
1	1.337			
2	1.299			
3	1.321			
4	1.349			
5	1.331			
Mean	1.327			
S.Dev	0.019			


FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{SS}}$

SEC : 15 Sec

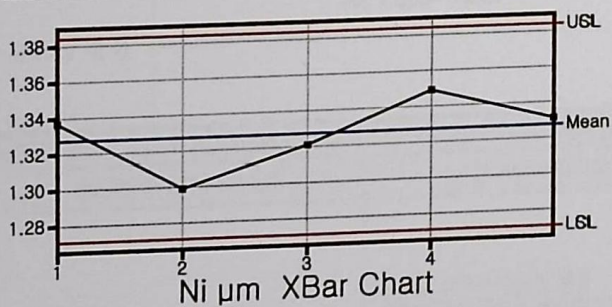

도금원소 : Ni//SS
측정값 개수 5
최대값 1.349
최소값 1.299
범위 0.050
평균값 1.327
표준편차 0.019
변동계수 1.419

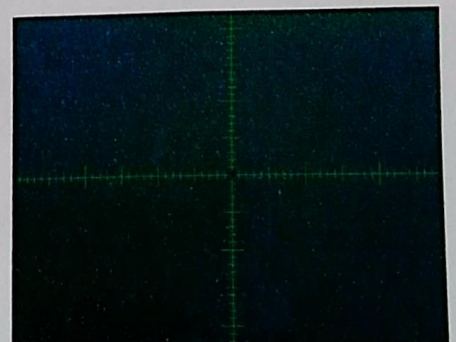

우리하이피